

Specifications

Updated 2026-02-20 | ⌚ 6 minute(s) read # PXle-1071 # Specifications

This document contains specifications for the chassis.

Caution
Specifications are subject to change without notice.

Electrical

AC Input

Table 1. AC Input

Input voltage range	100 to 240 VAC
Operating voltage range	90 to 264 VAC
Input current rating	4 to 2 A
Input frequency	50/60 Hz
Operating frequency range	47 to 63 Hz
Efficiency	70% typical
Power disconnect	The AC power cable provides main power disconnect.

Table 2. Line Regulation

Voltage Rail	Regulation
3.3 V	<±0.2%
5 V	<±0.1%
±12 V	<±0.1%

Caution
Disconnect power cord to completely remove power.

Note
The operating range is guaranteed by design, with the exception that 400 Hz operation is only supported from 100 to 120 VAC.

DC Output

Table 3. DC current capacity (I_{mp})

Voltage	Maximum Current
+3.3 V	1 A
+5 V	1 A
+12 V	1 A
-12 V	1 A

Your PDF is being generated. Please leave this browser open until your PDF has downloaded.

Voltage	Maximum Current
5 V _{AUX}	0.75 A

Note
Maximum total usable power is 230 W.

Note
The maximum combined power available on +3.3 V and +5 V is 125 W.

Note
The maximum combined power available on +3.3 V and +5 V derates linearly to 100 W from 45 °C to 50 °C operating ambient temperature range.

Note
The -12 V regulation is ±5% for loads of 8 A or less on the +12 V rail.

Table 4. Backplane slot current capacity

Slot	+5 V	V (I/O)	+3.3 V	+12 V	-12 V	5 V _{AUX}
System Controller Slot	15 A	-	15 A	30 A	-	1 A
Hybrid Peripheral Slot with PXI-1 Peripheral	6 A	5 A	6 A	1 A	1 A	-
Hybrid Peripheral Slot with PXI-5 Peripheral	-	-	6 A	4 A	-	1 A

Note
Total system slot current should not exceed 45 A.

Note
PCI V(I/O) pins in PXI-1 peripheral slots and hybrid peripheral slots are connected to +5 V.

Note
The maximum power dissipated in the system slot should not exceed 140 W.

Note
The maximum power dissipated in a peripheral slot should not exceed 38.25 W.

Chassis Cooling

Per slot cooling capacity	38.25 W
Module cooling system	Forced air circulation (positive pressurization) through a 150 cfm fan with High/Auto speed selector
Slot airflow direction	Bottom of module to top of module
Module cooling intake	Bottom of chassis
Module cooling exhaust	Right side, rear, and top of chassis
Power supply cooling system	Forced air circulation
Power supply cooling intake	Front and left side

Your PDF is being generated. Please leave this browser open until your PDF has downloaded.

Power supply cooling exhaust	Rear of chassis
------------------------------	-----------------

Environmental

Maximum altitude	2,000 m (800 mbar) (at 25 °C ambient)
Measurement Category	II
Pollution Degree	2

For indoor use only.

Operating Environment

Ambient temperature range	0 °C to 50 °C (Tested in accordance with IEC-60068-2-1 and IEC-60068-2-2. Meets MIL-PRF-28800F Class 3 low temperature limit and MIL-PRF-28800F Class 2 high temperature limit.)
Relative humidity range	20% to 80%, noncondensing (Tested in accordance with IEC-60068-2-56.)

Storage Environment

Ambient temperature range	–40 °C to 71 °C (Tested in accordance with IEC-60068-2-1 and IEC-60068-2-2. Meets MIL-PRF-28800F Class 3 limits.)
Relative humidity range	5% to 95%, noncondensing (Tested in accordance with IEC-60068-2-56.)

Shock and Vibration

Operational shock	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC-60068-2-27. Meets MIL-PRF-28800F Class 2 limits.)
Random Vibration	
Operating	5 to 500 Hz, 0.3 g _{rms}
Nonoperating	5 to 500 Hz, 2.4 g _{rms} (Tested in accordance with IEC-60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

Acoustic Emissions

Sound Pressure Level (at Operator Position)

(Tested in accordance with ISO 7779. Meets MIL-PRF-28800F requirements.)

Auto fan (up to –30 °C ambient)	48.4 dBA
High fan	61.9 dBA

Sound Power

Auto fan (up to –30 °C ambient)	59.9 dBA
High fan	68.7 dBA

Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment :

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1

Your PDF is being generated. Please leave this browser open until your PDF has downloaded.

Note
For safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326 (IEC 61326): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions

Note
For the standards applied to assess the EMC of this product, refer to the *Online Product Certification* section.

Note
For EMC compliance, operate this device with shielded cabling.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2011/65/EU; Restriction of Hazardous Substances (RoHS)
- 2014/53/EU; Radio Equipment Directive (RED)
- 2014/34/EU; Potentially Explosive Atmospheres (ATEX)

Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit [ni.com/product-certifications](#), search by model number, and click the appropriate link.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Engineering a Healthy Planet* web page at [ni.com/environment](#). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

EU and UK Customers

 **Waste Electrical and Electronic Equipment (WEEE)**—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit [ni.com/environment/weee](#).

电子信息产品污染控制管理办法（中国RoHS）

 **中国RoHS**—NI符合中国电子信息产品中限制使用某些有害物质指令(RoHS)。关于NI中国RoHS合规性信息，请登录 [ni.com/environment/rohs_china](#)。(For information about China RoHS compliance, go to [ni.com/environment/rohs_china](#).)

Backplane

Size	3U-sized; one system slot (with three system expansion slots) and three peripheral slots. Compliant with IEEE 1101.10 mechanical packaging. PXI Express Specification compliant. Accepts both PXI Express and CompactPCI (PICMG 2.0 R 3.0) 3U modules.
Backplane bare-board material	UL 94 V-0 Recognized
Backplane connectors	Conforms to IEC 917 and IEC 1076-4-101 III 94 V-0 rated

10 MHz System Reference Clock: PXI_CLK10

Maximum slot-to-slot skew	500 ps
---------------------------	--------

Your PDF is being generated. Please leave this browser open until your PDF has downloaded.

Accuracy	±25 ppm max (guaranteed over the operating temperature range)
Maximum jitter	5 ps RMS phase-jitter (10 Hz–1 MHz range)
Duty-factor	45% to 55%
Unloaded signal swing	3.3 V ±0.3 V

Note
For other specifications, refer to the *PXI-1 Hardware Specification*.

100 MHz System Reference Clock: PXIe_CLK100 and PXIe_SYNC100

Maximum slot-to-slot skew	100 ps
Accuracy	±25 ppm max (guaranteed over the operating temperature range)
Maximum jitter	3 ps RMS phase-jitter (10 Hz to 12 kHz range), 2 ps RMS phase-jitter (12 kHz to 20 MHz range)
Duty-factor for PXIe_CLK100	45% to 55%
Absolute differential voltage (When terminated with a 50 Ω load to 1.30 V or Thévenin equivalent)	400 to 1000 mV

Note
For other specifications, refer to the *PXI-5 PXI Express Hardware Specification*

Mechanical

Table 5. Chassis Dimensions

Height	6.97 in. (177 mm)
Width	10.12 in. (257 mm)
Depth	8.43 in. (214.2 mm)

Table 6. Physical Characteristics

Weight	13.1 lb (5.94 kg)
Chassis materials	Stainless Steel, Extruded Aluminum, Cold Rolled Steel, and PC-ABS
Finish	Conductive Clear Iridite on Aluminum, Clear Chromate Zinc Plating on Cold Rolled Steel, Polyurethane Enamel, and Polyester Urethane Powder Paint

The following figures show the PXIe-1071 chassis dimensions. The holes shown are for the installation of the optional rack mount kit (part number 778948-01). You can install rack mount kits on the front or rear of the chassis, depending on which end of the chassis you want to face toward the front of the instrument cabinet. Notice that the front and rear chassis mounting holes (size M4) are symmetrical.

Figure 1. PXIe-1071 Chassis Dimensions (Front and Side)

Your PDF is being generated. Please leave this browser open until your PDF has downloaded.

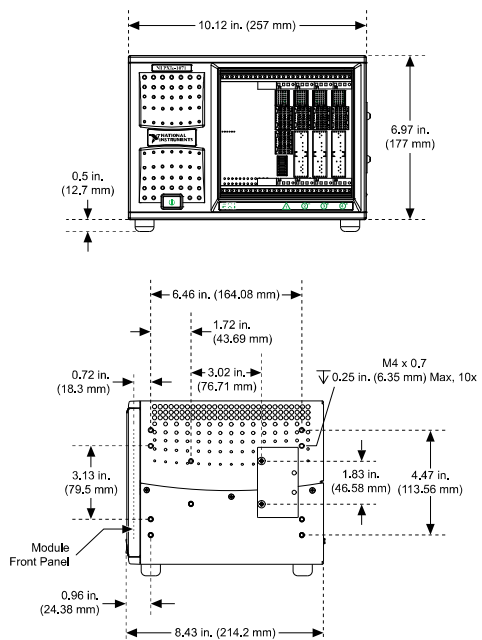


Figure 2. PXle-1071 Chassis Dimensions (Bottom)


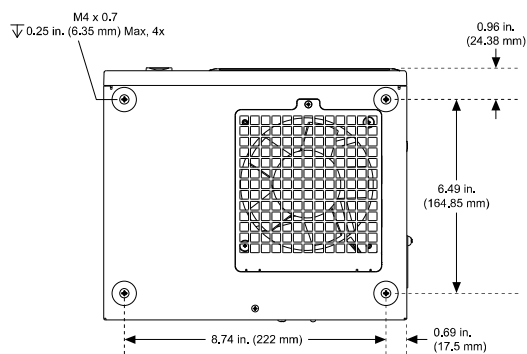


Figure 3. NI Chassis Rack Mount Kit Components

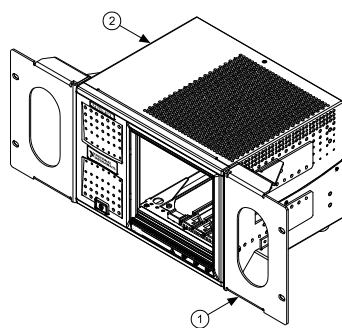

1. Front Rack Mount Kit
2. PXle-1071 Chassis

Previous

< No previous section

Next

No next section >

Your PDF is being generated. Please leave this browser open until your PDF has downloaded.