

COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash  Get Credit  Receive a Trade-In Deal

OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



Bridging the gap between the manufacturer and your legacy test system.

 1-800-915-6216

 www.apexwaves.com

 sales@apexwaves.com

All trademarks, brands, and brand names are the property of their respective owners.

Request a Quote

 **CLICK HERE**

PCI-8254R

NOTE TO USERS

Update to NI Vision I/O Terminal Block and Prototyping Accessory Front Panel

National Instruments is updating the front panel labels on the NI Vision I/O Terminal Block and Prototyping Accessory. You may receive a version of the accessory that is labeled NI 1450 I/O Terminal Block and Prototyping Accessory. There are no functionality differences between the two versions. This note describes how to use the NI PCIe-8255R with the version of the accessory labeled NI 1450 I/O Terminal Block and Prototyping Accessory.

Powering the Isolated Outputs on the NI 8255R

To wire isolated output power to the NI 8255R while using the NI 1450 I/O Accessory, you must connect the NI 1450 I/O Accessory to an external power supply, and use a 37-pin to 44-pin cable to connect the NI 1450 I/O Accessory to the NI 8255R. The NI 1450 I/O Accessory powers the NI 8255R via the 44-pin D-SUB connector.

The 44-pin D-SUB connector on the NI 8255R provides access to V_{iso} and C_{iso} for powering the isolated outputs. The V_{iso} terminal provides the isolated power (5 to 30 VDC) for the NI 8255R device. The C_{iso} terminal provides the common-mode signal for the NI 8255R device. Provide V_{iso} and C_{iso} to the NI 8255R via the V_{iso} and C_{iso} screw terminals on the NI 1450 I/O Accessory.

The orange **ISO** LED on the front panel of the NI 8255R device and the **ISO PWR OUT** LED on the front panel of the NI 1450 I/O Accessory will illuminate when V_{iso} and C_{iso} are properly connected to an external power supply.

Refer to the *NI PCIe-8255R Quick Start Guide* for more information about powering the NI 8255R. The following illustration shows the front panel of the NI 1450 I/O Accessory.



Note CVS-1450 devices and the NI 8254R device power the NI 1450 I/O Accessory via the 44-pin D-SUB connector located on the devices. The power connector on CVS-1450 devices and the NI 8254R device provides V_{iso} and C_{iso} . With these devices, do *not* connect an external power supply to the V_{iso} and C_{iso} screw terminals on the NI 1450 I/O Accessory.

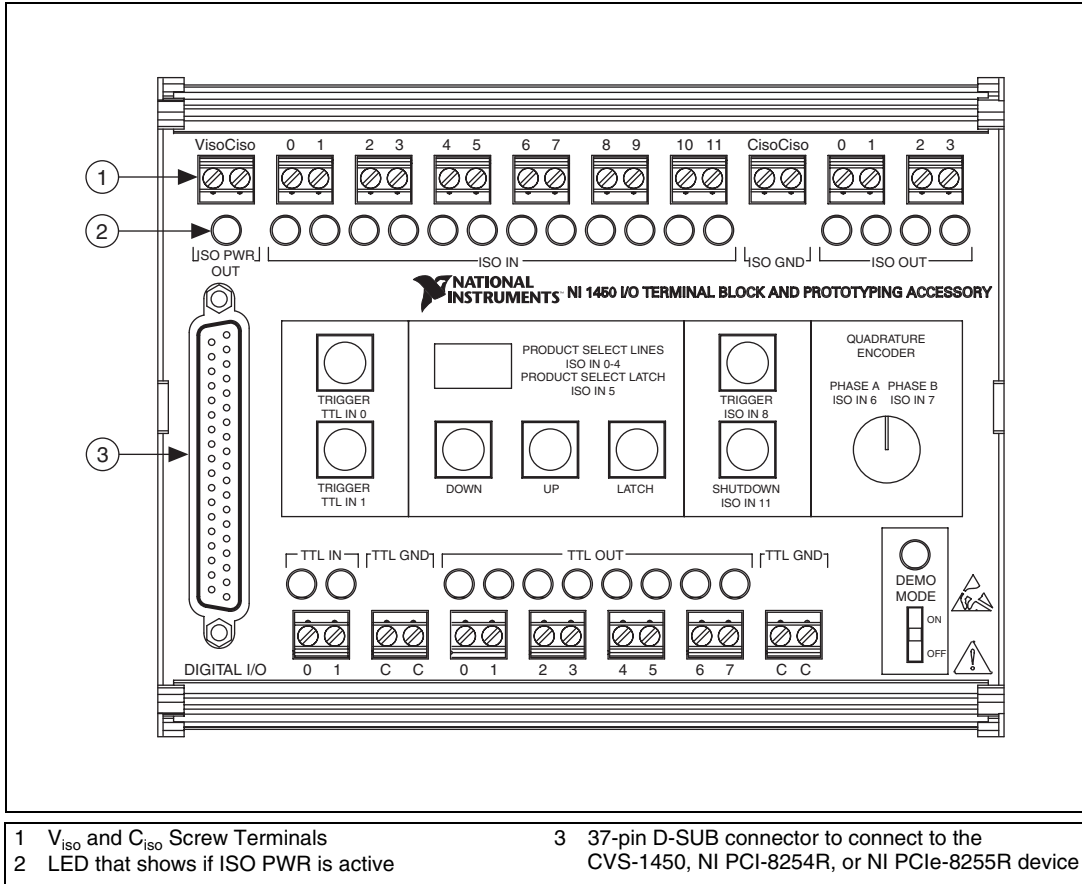


Figure 1. NI 1450 I/O Terminal Block and Prototyping Accessory Front Panel

National Instruments, NI, ni.com, and LabVIEW are trademarks of National Instruments Corporation. Refer to the *Terms of Use* section on ni.com/legal for more information about National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your CD, or ni.com/patents.