

## COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

## SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash    Get Credit    Receive a Trade-In Deal

## OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



*Bridging the gap between the manufacturer and your legacy test system.*

 1-800-915-6216

 [www.apexwaves.com](http://www.apexwaves.com)

 [sales@apexwaves.com](mailto:sales@apexwaves.com)

All trademarks, brands, and brand names are the property of their respective owners.

**Request a Quote**

 **CLICK HERE**

**GPIB-232CT-A**

This guide contains the product specifications for the GPIO-232CV-A and GPIO-232CT-A OEM products. It also contains the critical measurements that are necessary for you to design an enclosure or properly mount the product.

## Product Description

The GPIO-232CV-A and GPIO-232CT-A OEM perform the same functions as the standard GPIO-232CV-A and GPIO-232CT-A, but are intended for use in custom applications. For documentation on the functionality of the GPIO-232CV-A and GPIO-232CT-A, refer to the following National Instruments user manuals:

*GPIO-232CV-A User Manual*

*GPIO-232CT-A User Manual*

## Product Specifications

The following tables describe the power requirements and the physical and environmental characteristics of the GPIO-232CV-A and GPIO-232CT-A OEM products.

Table 1. Power Requirements

Characteristic	Specification
5VDC +/- 10%	280 mA typical 400 mA maximum

Table 2. Physical Characteristics

Characteristic	Specification
Dimension PWB	2.70 in. by 4.45 in. (6.858 cm by 11.303 cm)
Overall	2.76 in. by 5.17 in. by 0.86 in. (7.010 cm by 13.132 cm by 2.184 cm)

(continues)

Table 2. Physical Characteristics (Continued)

Characteristic	Specification
Weight	3 oz. (85.05 grams)
I/O connectors	
GPIB port	IEEE 488 standard 24-pin
RS-232 port	Standard 9-pin male D-subminiature

Table 3. Environmental Characteristics

Characteristic	Specification
Operating Environment	
Temperature	0° to 40° C
Relative Humidity	10% to 90%, noncondensing
Storage Environment	
Temperature	-20° to 70° C
Relative Humidity	10% to 90%, noncondensing

## Parts Locator Diagrams

Figure 1 shows the locations of the components on the top side of the circuit card assembly. Notice that according to Figure 1, you hook up power at W1 on the circuit card assembly. W1 consists of two .035 in. holes spaced at .2 in. centers. These holes accept either .025 in. square posts or 20 to 22 AWG wire.

Figure 2 shows the locations of the components on the bottom side of the circuit card assembly as well as the function of each LED.

## Mechanical Diagrams

**Note:** *Dimensions are given in inches.*

Figure 3 shows the hole and component placement. Use this information as a guide to properly mount the circuit card assembly.

Figure 4 consists of four smaller figures that show the dimensions of the connectors, switches, and LEDs. These dimensions help you determine the proper clearance around these components when you design an enclosure.

Figure 5 contains the height requirements that you need to accommodate to properly mount the circuit card assembly inside an enclosure.

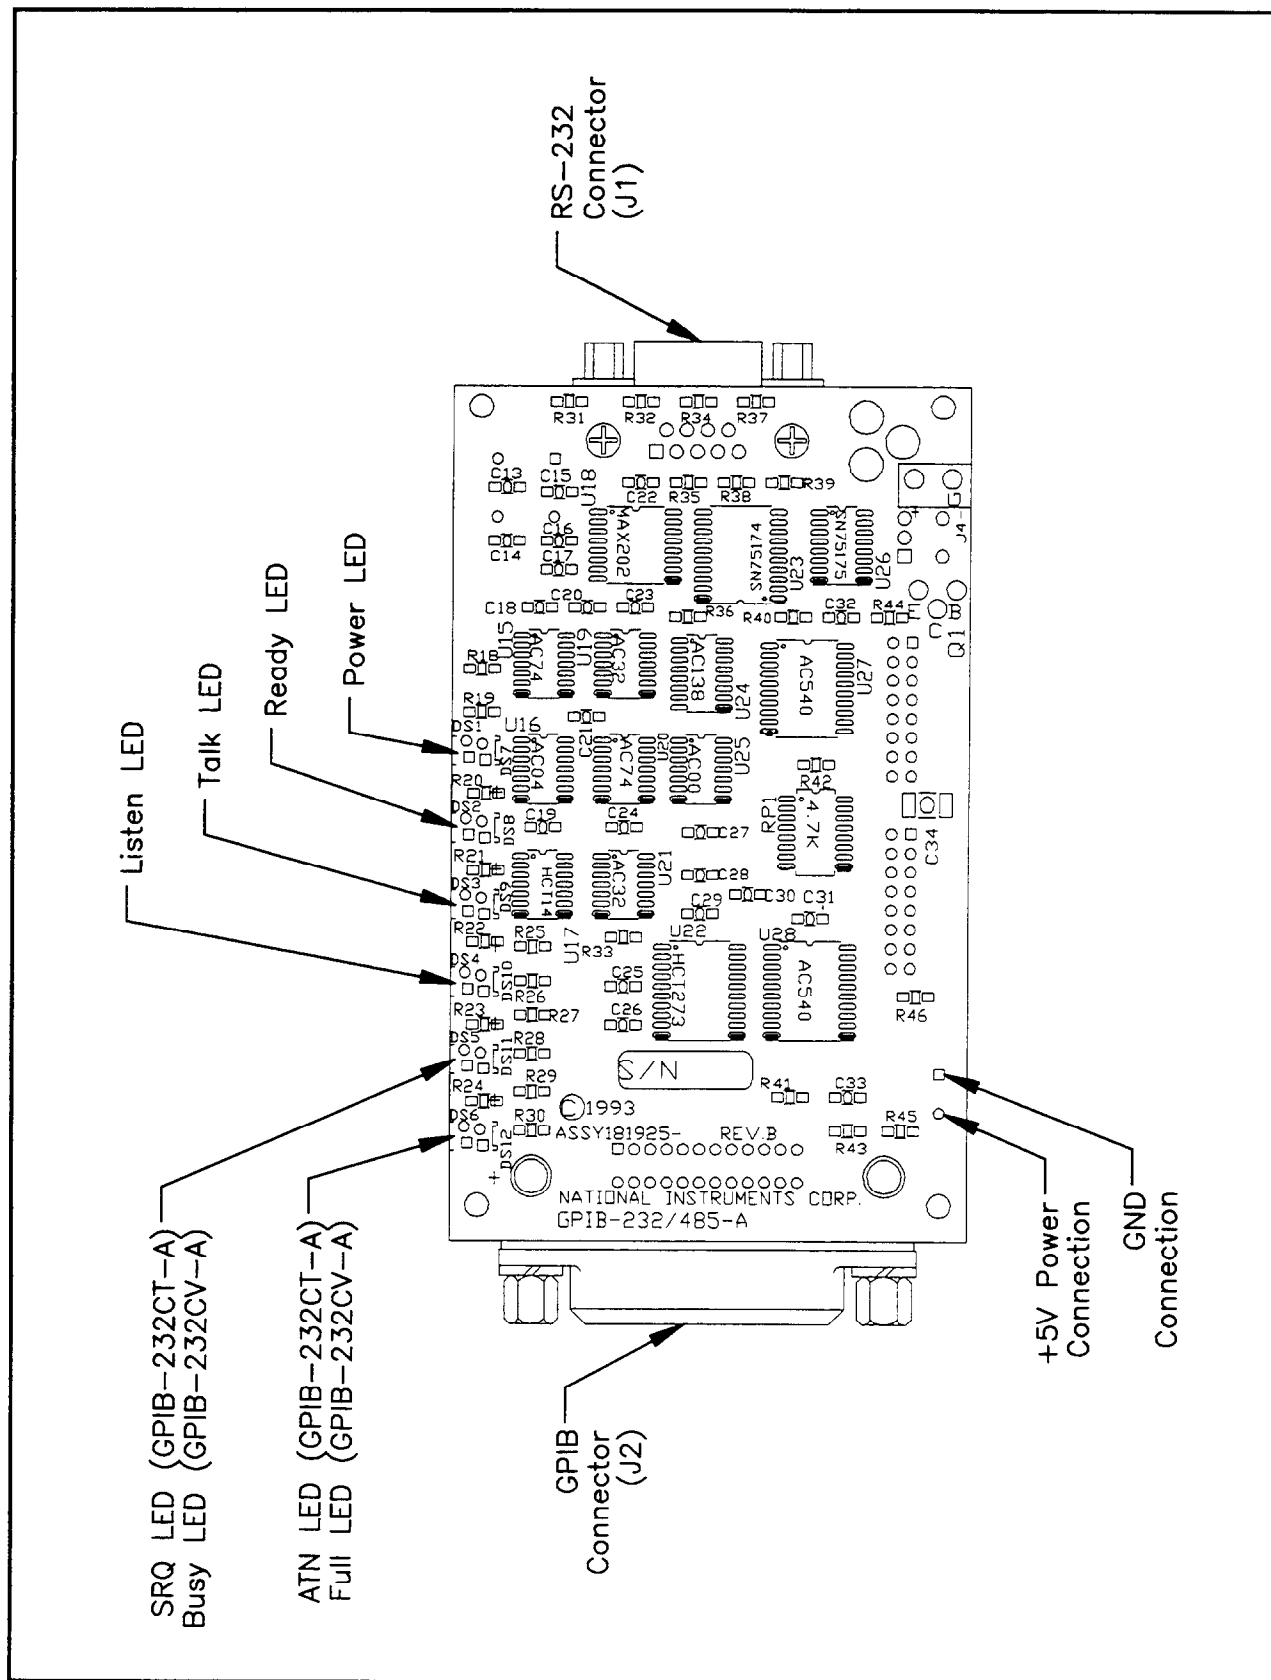


Figure 1. Component on the Top Side of the Circuit Card Assembly

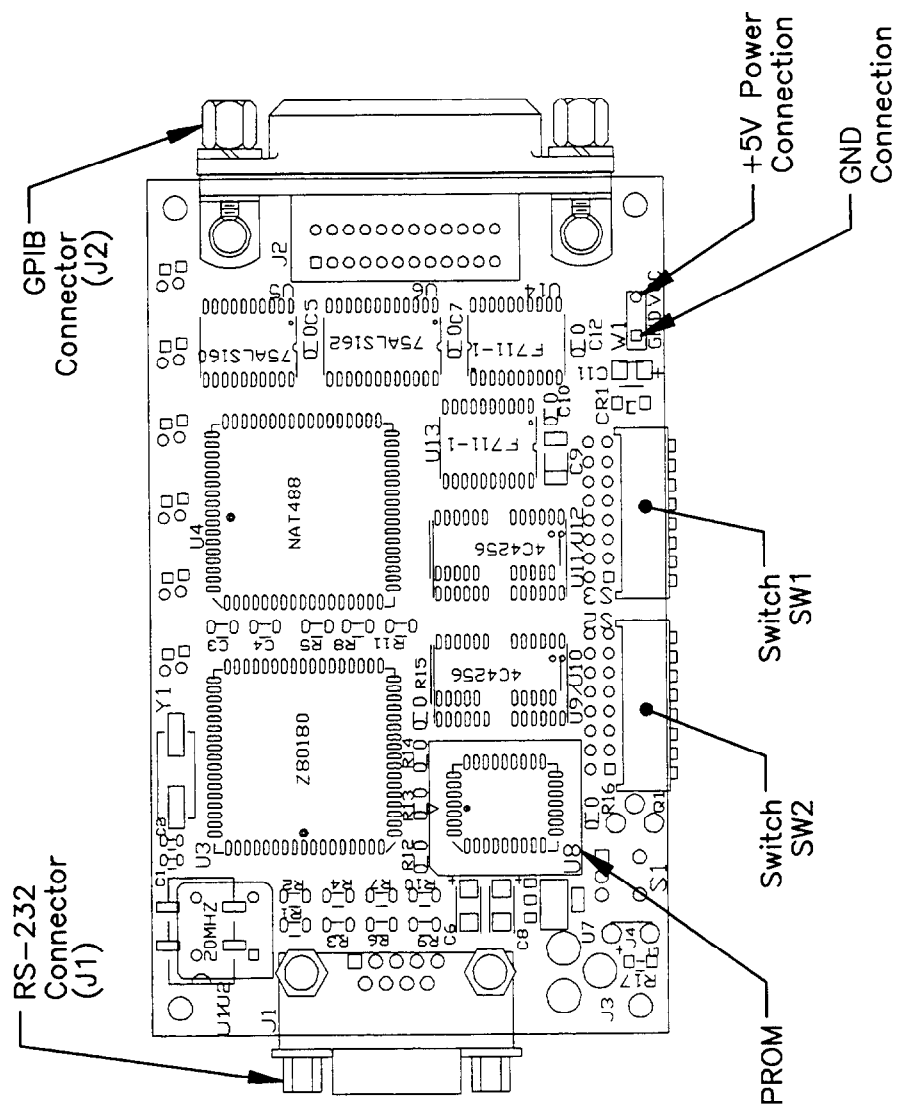


Figure 2. Component on the Bottom Side of the Circuit Card Assembly

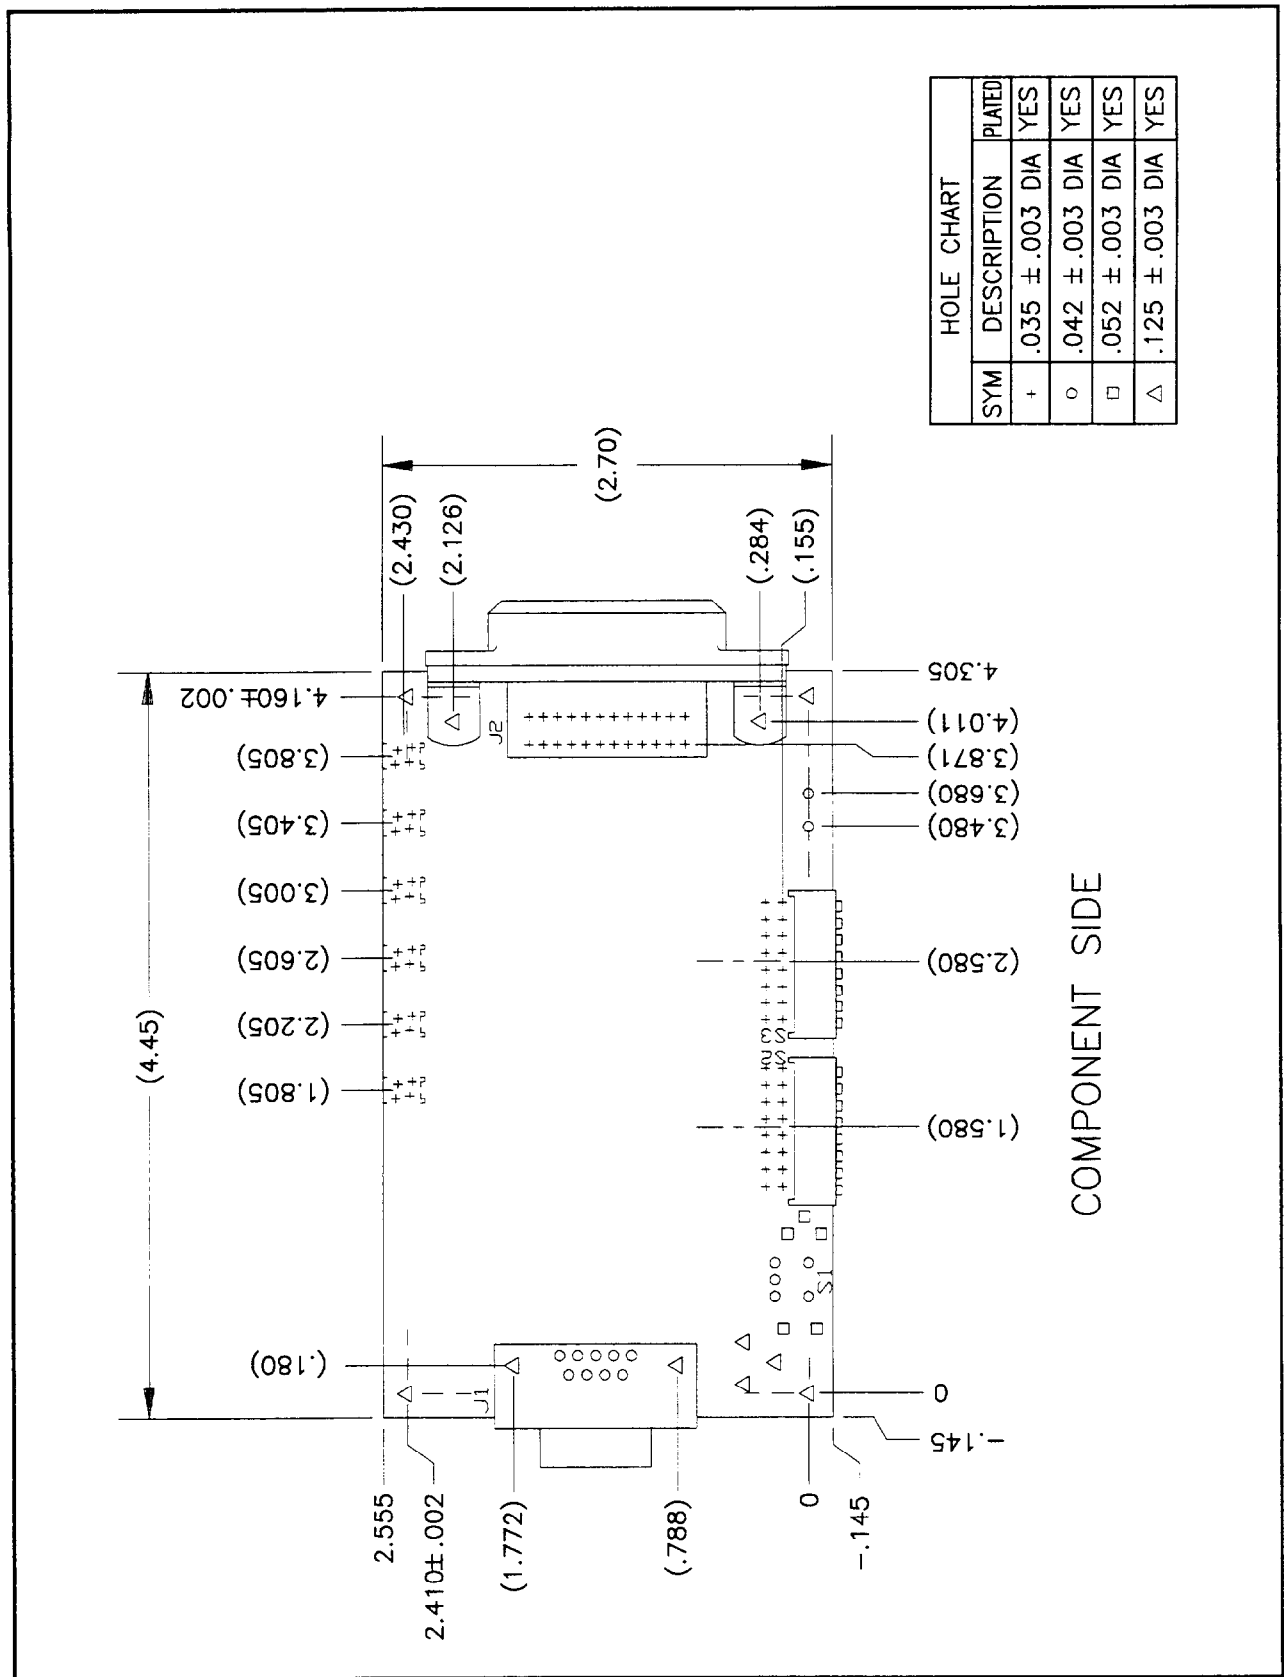


Figure 3. Hole and Component Placement

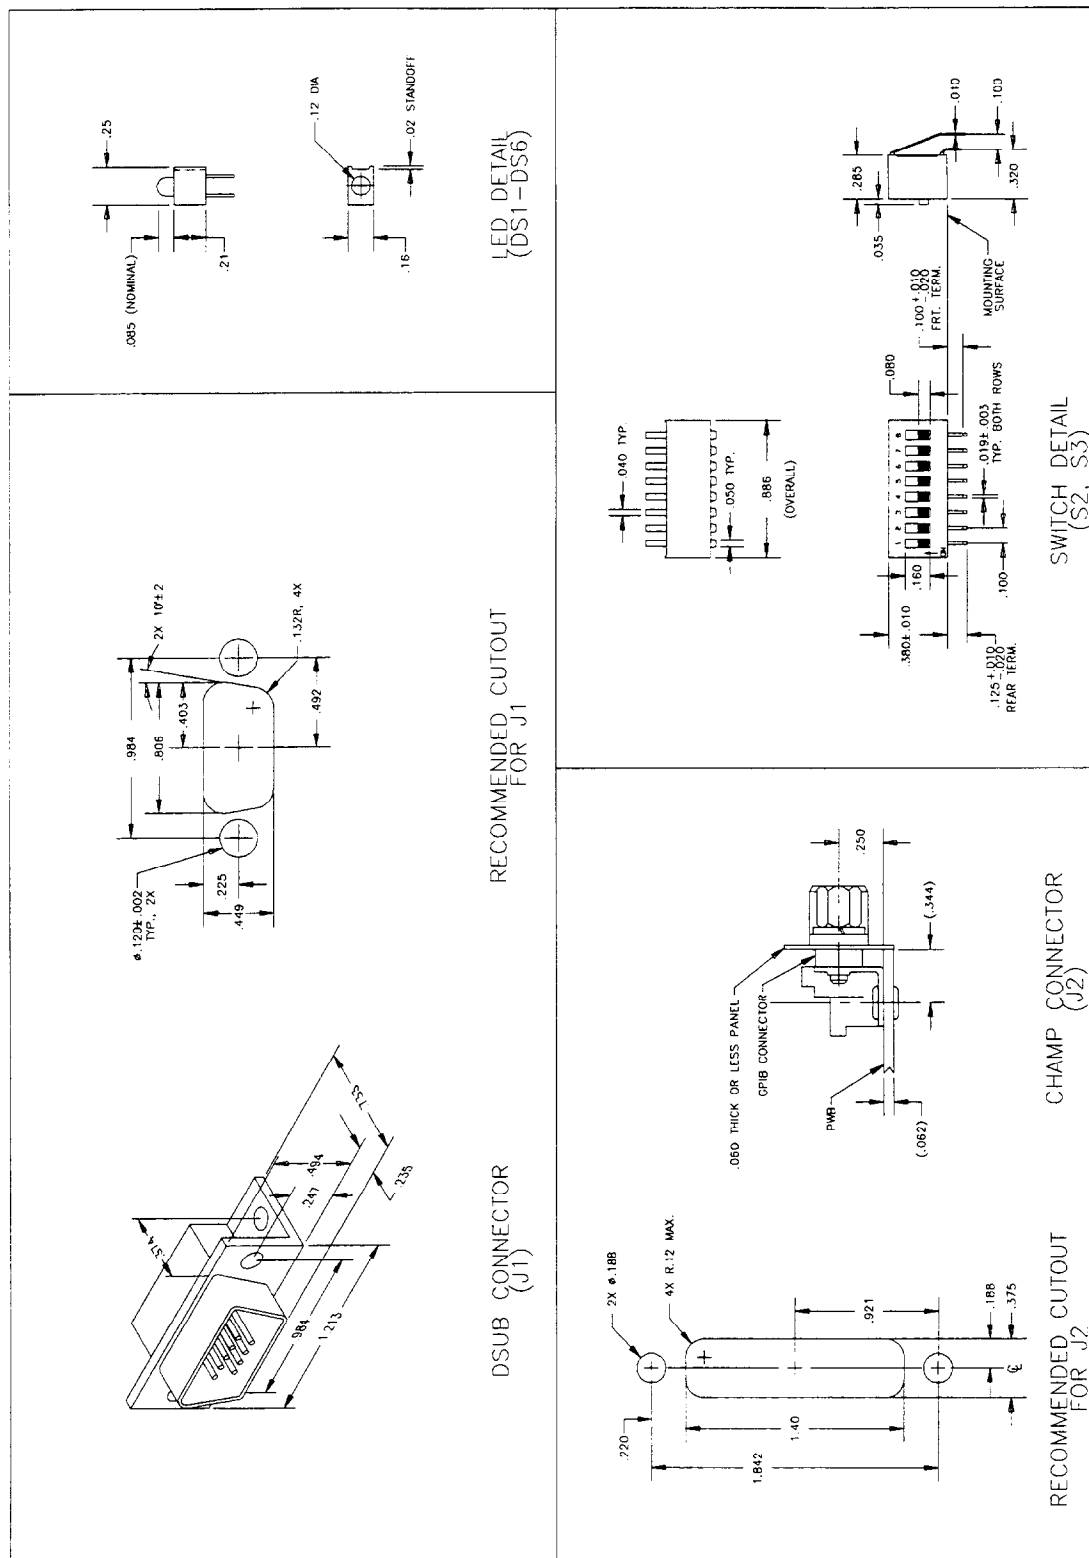


Figure 4. Measurements for Mounting Connectors, Switches, and LEDs

## HEIGHT REQUIREMENTS

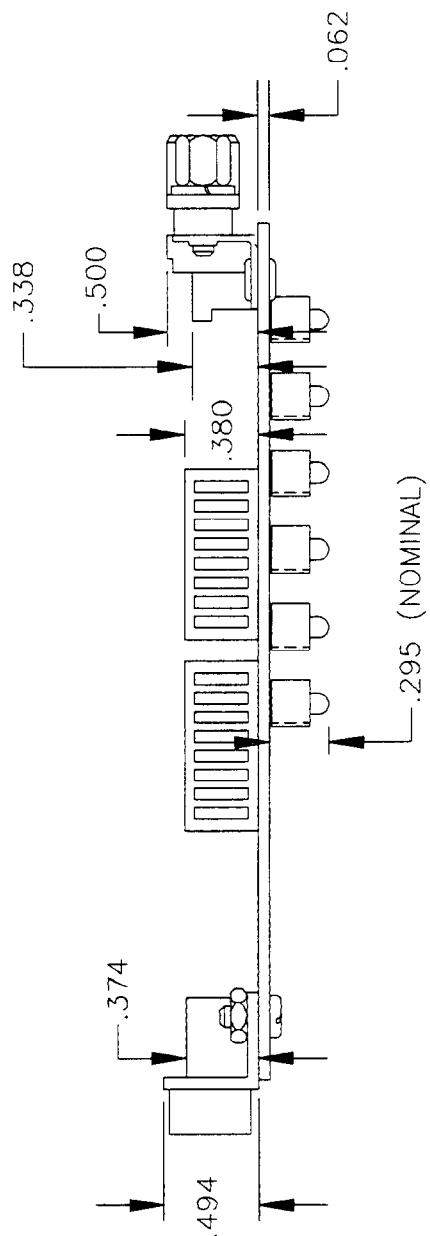


Figure 5. Height Requirements