

## COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

## SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash    Get Credit    Receive a Trade-In Deal

## OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



*Bridging the gap between the manufacturer and your legacy test system.*

 1-800-915-6216

 [www.apexwaves.com](http://www.apexwaves.com)

 [sales@apexwaves.com](mailto:sales@apexwaves.com)

*All trademarks, brands, and brand names are the property of their respective owners.*

**Request a Quote**

 **CLICK HERE**

**PXI-6515**

## NOTE TO USERS

# NI 65xx Pinout Labels for the SCB-100A


## Digital I/O Modules/Devices Using the 100-Pin Shielded Connector Block


If you are using an NI 65xx (formerly referred to as DIO Series) digital I/O device or module with the SCB-100A, you can print and attach a connector-specific pinout label to the cover of the connector block for easy connection reference. This document provides labels for the following models:

- NI 6508/6509
- NI 6511/6512/6513/6514/6515
- NI 6528/6529
- PCI-DIO-96

Use the following label if you are connecting the SCB-100A to the NI 6508 and PCI-DIO-96 models.

**Figure 1. NI 6508/PCI-DIO-96**





**DIGITAL**

1	APC7
2	BPC7
3	APC6
4	BPC6
5	APC5
6	BPC5
7	APC4
8	BPC4
9	APC3
10	BPC3
11	APC2
12	BPC2
13	APC1
14	BPC1
15	APC0
16	BPC0
17	APB7
18	BPB7

**DIGITAL**

19	APB6
20	BPB6
21	APB5
22	BPB5
23	APB4
24	BPB4
25	APB3
26	BPB3
27	APB2
28	BPB2
29	APB1
30	BPB1
31	APB0
32	BPB0
33	APA7
34	BPA7

**DIGITAL**

35	APA6
36	BPA6
37	APA5
38	BPA5
39	APA4
40	BPA4
41	APA3
42	BPA3
43	APA2
44	BPA2
45	APA1
46	BPA1
47	APA0
48	BPA0
49	+5 V
50	GND

**DIGITAL**

51	CPC7
52	DPC7
53	CPC6
54	DPC6
55	CPC5
56	DPC5
57	CPC4
58	DPC4
59	CPC3
60	DPC3
61	CPC2
62	DPC2
63	CPC1
64	DPC1
65	CPC0
66	DPC0

**DIGITAL**

67	CPB7
68	DPB7
69	CPB6
70	DPB6
71	CPB5
72	DPB5
73	CPB4
74	DPB4
75	CPB3
76	DPB3
77	CPB2
78	DPB2
79	CPB1
80	DPB1
81	CPB0
82	DPB0

**DIGITAL**

83	CPA7
84	DPA7
85	CPA6
86	DPA6
87	CPA5
88	DPA5
89	CPA4
90	DPA4
91	CPA3
92	DPA3
93	CPA2
94	DPA2
95	CPA1
96	DPA1
97	CPA0
98	DPA0
99	+5 V
100	GND

**SCB-100A Quick Reference Label**

Digital I/O NI 6508/PCI-DIO-96

Use the following label if you are connecting the SCB-100A to the NI 6509 models.

**Figure 2.** NI 6509




DIGITAL		DIGITAL		DIGITAL		DIGITAL		DIGITAL		DIGITAL	
1	P2.7	19	P1.6	35	P0.6	51	P8.7	67	P7.7	83	P6.7
2	P5.7	20	P4.6	36	P3.6	52	P11.7	68	P10.7	84	P9.7
3	P2.6	21	P1.5	37	P0.5	53	P8.6	69	P7.6	85	P6.6
4	P5.6	22	P4.5	38	P3.5	54	P11.6	70	P10.6	86	P9.6
5	P2.5	23	P1.4	39	P0.4	55	P8.5	71	P7.5	87	P6.5
6	P5.5	24	P4.4	40	P3.4	56	P11.5	72	P10.5	88	P9.5
7	P2.4	25	P1.3	41	P0.3	57	P8.4	73	P7.4	89	P6.4
8	P5.4	26	P4.3	42	P3.3	58	P11.4	74	P10.4	90	P9.4
9	P2.3	27	P1.2	43	P0.2	59	P8.3	75	P7.3	91	P6.3
10	P5.3	28	P4.2	44	P3.2	60	P11.3	76	P10.3	92	P9.3
11	P2.2	29	P1.1	45	P0.1	61	P8.2	77	P7.2	93	P6.2
12	P5.2	30	P4.1	46	P3.1	62	P11.2	78	P10.2	94	P9.2
13	P2.1	31	P1.0	47	P0.0	63	P8.1	79	P7.1	95	P6.1
14	P5.1	32	P4.0	48	P3.0	64	P11.1	80	P10.1	96	P9.1
15	P2.0	33	P0.7	49	+5 V	65	P8.0	81	P7.0	97	P6.0
16	P5.0	34	P3.7	50	GND	66	P11.0	82	P10.0	98	P9.0
17	P1.7									99	+5 V
18	P4.7									100	GND


**SCB-100A Quick Reference Label**

Digital I/O NI 6509

Use the following label if you are connecting the SCB-100A to the NI 6511 models.

**Figure 3. NI 6511**





DIGITAL	
1	P0.0
2	P0.1
3	P0.2
4	P0.3
5	P0.4
6	P0.5
7	P0.6
8	P0.7
9	P0.COM
10	P0.COM
11	P0.COM
12	P0.COM
13	P2.0
14	P2.1
15	P2.2
16	P2.3
17	P2.4
18	P2.5

DIGITAL	
19	P2.6
20	P2.7
21	P2.COM
22	P2.COM
23	P2.COM
24	P2.COM
25	NC
26	P4.0
27	P4.1
28	P4.2
29	P4.3
30	P4.4
31	P4.5
32	P4.6
33	P4.7
34	P4.COM

DIGITAL	
35	P4.COM
36	P4.COM
37	P4.COM
38	P6.0
39	P6.1
40	P6.2
41	P6.3
42	P6.4
43	P6.5
44	P6.6
45	P6.7
46	P6.COM
47	P6.COM
48	P6.COM
49	P6.COM
50	NC

DIGITAL	
51	P1.0
52	P1.1
53	P1.2
54	P1.3
55	P1.4
56	P1.5
57	P1.6
58	P1.7
59	P1.COM
60	P1.COM
61	P1.COM
62	P1.COM
63	P3.0
64	P3.1
65	P3.2
66	P3.3


DIGITAL	
67	P3.4
68	P3.5
69	P3.6
70	P3.7
71	P3.COM
72	P3.COM
73	P3.COM
74	P3.COM
75	NC
76	P5.0
77	P5.1
78	P5.2
79	P5.3
80	P5.4
81	P5.5
82	P5.6

DIGITAL	
83	P5.7
84	P5.COM
85	P5.COM
86	P5.COM
87	P5.COM
88	P7.0
89	P7.1
90	P7.2
91	P7.3
92	P7.4
93	P7.5
94	P7.6
95	P7.7
96	P7.COM
97	P7.COM
98	P7.COM
99	P7.COM
100	NC

**SCB-100A Quick Reference Label**  
 Digital I/O NI 6511  
 \*NC: No Connect

Use the following label if you are connecting the SCB-100A to the NI 6512 models. Note that the connector bank layout on the label differs from the actual connector bank layout on the SCB-100A hardware.

**Figure 4.** NI 6512



**SCB-100A Quick Reference Label**  
Digital I/O NI 6512  
\*NC: No Connect

**DIGITAL**

1	P0.0
2	P0.1
3	P0.2
4	P0.3
5	P0.4
6	P0.5
7	P0.6
8	P0.7
9	P0.COM (P0.GND)
10	P0.VCC
11	P0.VCC
12	P0.VCC
13	P2.0
14	P2.1
15	P2.2
16	P2.3
17	P2.4
18	P2.5

**DIGITAL**

83	P5.7
84	P5.COM (P5.GND)
85	P5.VCC
86	P5.VCC
87	P5.VCC
88	P7.0
89	P7.1
90	P7.2
91	P7.3
92	P7.4
93	P7.5
94	P7.6
95	P7.7
96	P7.COM (P7.GND)
97	P7.VCC
98	P7.VCC
99	P7.VCC
100	P7.+5 V

**DIGITAL**

19	P2.6
20	P2.7
21	P2.COM (P2.GND)
22	P2.VCC
23	P2.VCC
24	P2.VCC
25	NC
26	P4.0
27	P4.1
28	P4.2
29	P4.3
30	P4.4
31	P4.5
32	P4.6
33	P4.7
34	P4.COM (P4.GND)

**DIGITAL**

35	P4.VCC
36	P4.VCC
37	P4.VCC
38	P6.0
39	P6.1
40	P6.2
41	P6.3
42	P6.4
43	P6.5
44	P6.6
45	P6.7
46	P6.COM (P6.GND)
47	P6.VCC
48	P6.VCC
49	P6.VCC
50	P6.+5 V

**DIGITAL**


51	P1.0
52	P1.1
53	P1.2
54	P1.3
55	P1.4
56	P1.5
57	P1.6
58	P1.7
59	P1.COM (P1.GND)
60	P1.VCC
61	P1.VCC
62	P1.VCC
63	P3.0
64	P3.1
65	P3.2
66	P3.3

**DIGITAL**

67	P3.4
68	P3.5
69	P3.6
70	P3.7
71	P3.COM (P3.GND)
72	P3.VCC
73	P3.VCC
74	P3.VCC
75	NC
76	P5.0
77	P5.1
78	P5.2
79	P5.3
80	P5.4
81	P5.5
82	P5.6


Use the following label if you are connecting the SCB-100A to the NI 6513 models. Note that the connector bank layout on the label differs from the actual connector bank layout on the SCB-100A hardware.

**Figure 5. NI 6513**

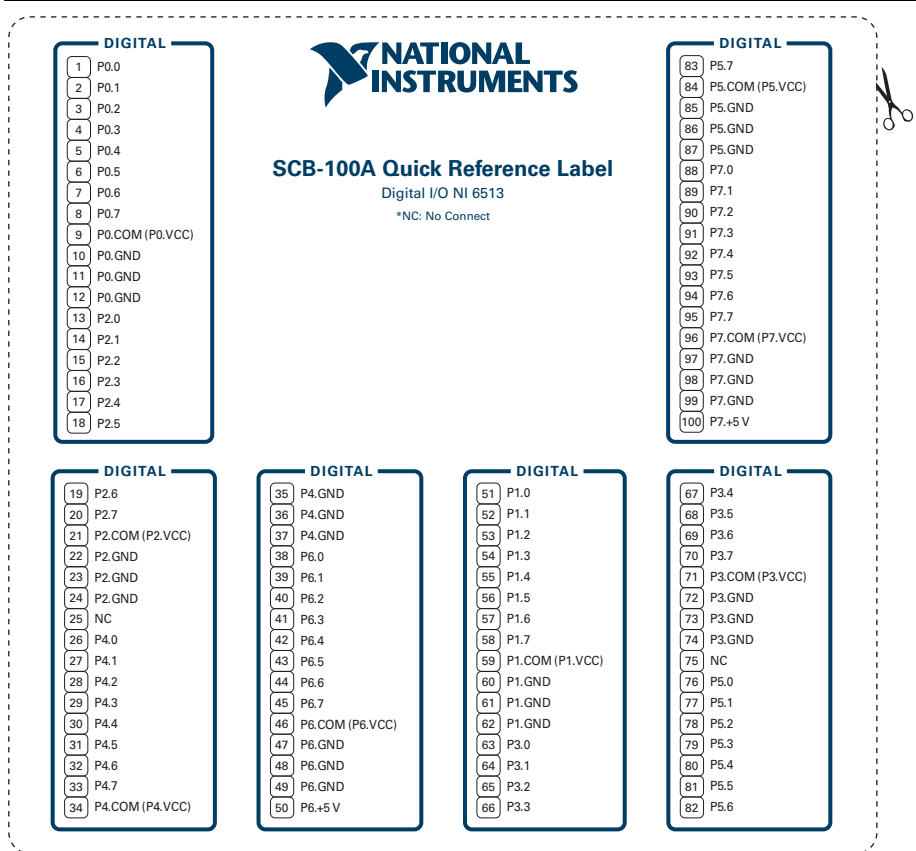

Use the following label if you are connecting the SCB-100A to the NI 6514 models. Note that the connector bank layout on the label differs from the actual connector bank layout on the SCB-100A hardware.

Figure 6. NI 6514



**SCB-100A Quick Reference Label**  
Digital I/O NI 6514  
\*NC: No Connect

**DIGITAL**

1	P0.0
2	P0.1
3	P0.2
4	P0.3
5	P0.4
6	P0.5
7	P0.6
8	P0.7
9	P0.COM
10	P0.COM
11	P0.COM
12	P0.COM
13	P2.0
14	P2.1
15	P2.2
16	P2.3
17	P2.4
18	P2.5

**DIGITAL**

83	P5.7
84	P5.COM (P5.GND)
85	P5.VCC
86	P5.VCC
87	P5.VCC
88	P7.0
89	P7.1
90	P7.2
91	P7.3
92	P7.4
93	P7.5
94	P7.6
95	P7.7
96	P7.COM (P7.GND)
97	P7.VCC
98	P7.VCC
99	P7.VCC
100	P7.+5 V

**DIGITAL**

19	P2.6
20	P2.7
21	P2.COM
22	P2.COM
23	P2.COM
24	P2.COM
25	NC
26	P4.0
27	P4.1
28	P4.2
29	P4.3
30	P4.4
31	P4.5
32	P4.6
33	P4.7
34	P4.COM (P4.GND)

**DIGITAL**

35	P4.VCC
36	P4.VCC
37	P4.VCC
38	P6.0
39	P6.1
40	P6.2
41	P6.3
42	P6.4
43	P6.5
44	P6.6
45	P6.7
46	P6.COM (P6.GND)
47	P6.VCC
48	P6.VCC
49	P6.VCC
50	P6.+5 V

**DIGITAL**

51	P1.0
52	P1.1
53	P1.2
54	P1.3
55	P1.4
56	P1.5
57	P1.6
58	P1.7
59	P1.COM
60	P1.COM
61	P1.COM
62	P1.COM
63	P3.0
64	P3.1
65	P3.2
66	P3.3


**DIGITAL**

67	P3.4
68	P3.5
69	P3.6
70	P3.7
71	P3.COM
72	P3.COM
73	P3.COM
74	P3.COM
75	NC
76	P5.0
77	P5.1
78	P5.2
79	P5.3
80	P5.4
81	P5.5
82	P5.6




Use the following label if you are connecting the SCB-100A to the NI 6515 models. Note that the connector bank layout on the label differs from the actual connector bank layout on the SCB-100A hardware.

**Figure 7. NI 6515**

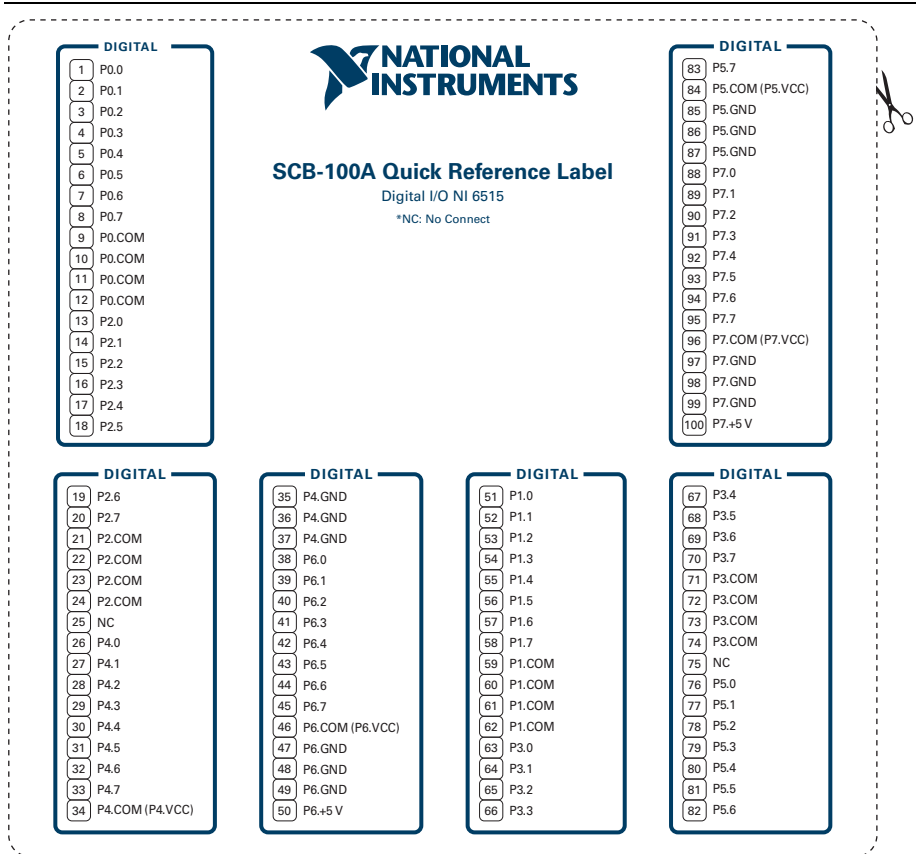

Use the following label if you are connecting the SCB-100A to the NI 6528/6529 models.

Figure 8. NI 6528/6529

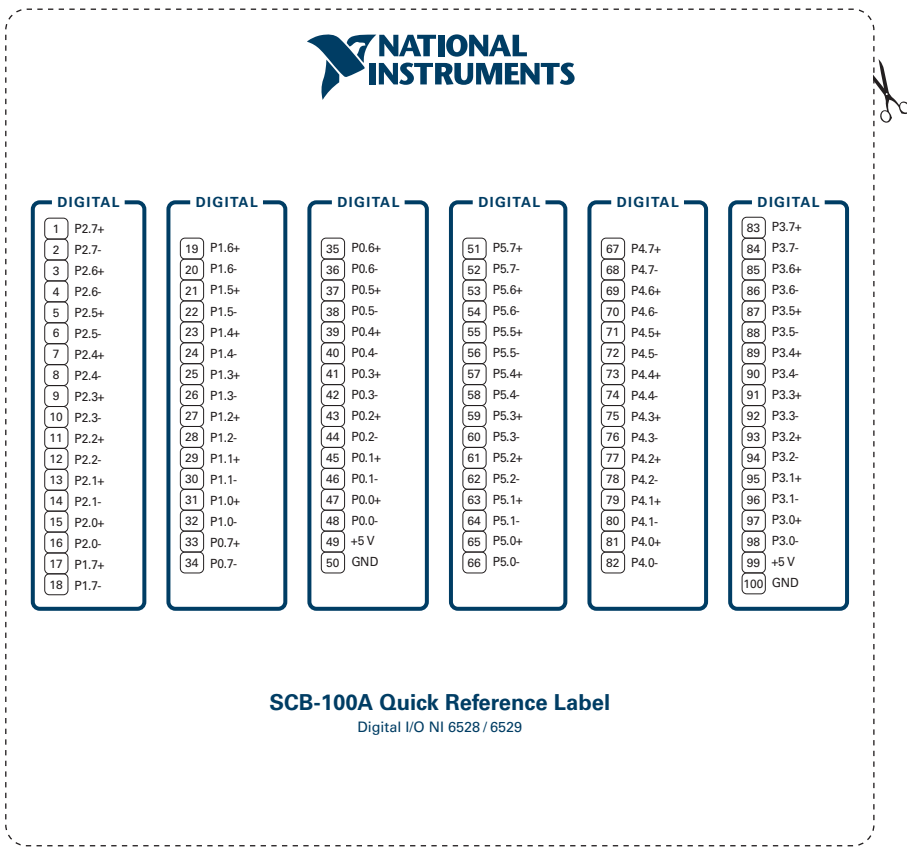

Refer to the *NI Trademarks and Logo Guidelines* at [ni.com/trademarks](http://ni.com/trademarks) for more information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patents Notice* at [ni.com/patents](http://ni.com/patents). You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at [ni.com/legal/export-compliance](http://ni.com/legal/export-compliance) for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2017 National Instruments. All rights reserved.