

COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash  Get Credit  Receive a Trade-In Deal

OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



Bridging the gap between the manufacturer and your legacy test system.

 1-800-915-6216

 www.apexwaves.com

 sales@apexwaves.com

All trademarks, brands, and brand names are the property of their respective owners.

Request a Quote

 **CLICK HERE**

PXIe-2532

NI PXI/PXIe-2532 Specifications

512-Crosspoint, 1-Wire Matrix

このドキュメントには、日本語ページも含まれています。

This document lists specifications for the NI PXI/PXIe-2532 (NI 2532) 512-crosspoint matrix. All specifications are subject to change without notice. Visit ni.com/manuals for the most current specifications.

Topologies 1-wire 4 × 128 matrix,
1-wire 8 × 64 matrix,
1-wire 16 × 32 matrix,
1-wire dual 4 × 64 matrix,
1-wire dual 8 × 32 matrix,
1-wire dual 16 × 16 matrix,
1-wire sixteen 2 × 16 matrix,
2-wire 4 × 64 matrix,
2-wire 8 × 32 matrix,
2-wire 16 × 16 matrix

Refer to the *NI Switches Help* for detailed topology information.



Caution To ensure the specified EMC performance, operate this product only with shielded cables and accessories.



Caution Refer to the *Read Me First: Safety and Electromagnetic Compatibility* document at ni.com/manuals for important safety and compliance information.

About These Specifications

Specifications characterize the warranted performance of the instrument under the stated operating conditions.

Typical Specifications are specifications met by the majority of the instrument under the stated operating conditions and are tested at 23 °C. Typical specifications are not warranted.

All voltages are specified in DC, AC_{pk}, or a combination unless otherwise specified.

Input Characteristics

Maximum switching voltage

Channel-to-channel 100 V
Channel-to-ground 100 V, CAT I



Caution This module is rated for Measurement Category I and intended to carry signal voltages no greater than 100 V. This module can withstand up to 500 V impulse voltage. Do not use this module for connection to signals or for measurements within Categories II, III, or IV. Do not connect to MAINS supply circuits (for example, wall outlets) of 115 or 230 VAC. Refer to the *Read Me First: Safety and Electromagnetic Compatibility* document for more information on measurement categories.



Caution When hazardous voltages ($>42.4 V_{pk}/60 VDC$) are present on any relay terminal, safety low-voltage ($<42.4 V_{pk}/60 VDC$) cannot be connected to any other relay terminal.

Maximum current 0.5 A
(switching or carry, per channel)



Caution The maximum switching power is limited by the maximum switching current and the maximum voltage, and must not exceed 10 W.

Maximum switching power 10 W
(per channel)

DC path resistance

Initial $<1 \Omega$
End-of-life $\geq 2 \Omega$
Open channel $>1 \times 10^9 \Omega$



Note DC path resistance typically remains low for the life of the relay. At the end of relay life, the path resistance rapidly rises above 2 Ω. Load ratings apply to relays used within the specification before the end of relay life.

Thermal EMF

- 1-wire<50 μV
- 2-wire<20 μV

Bandwidth, typical (–3 dB, 50 Ω termination)

- 1-wire row/column≥30 MHz
- 2-wire row/column≥25 MHz

Crosstalk, typical (50 Ω termination)

- Channel-to-channel**
- 10 kHz<–89 dB
 - 100 kHz<–73 dB
 - 1 MHz<–54 dB
 - 10 MHz<–36 dB

Isolation, typical (50 Ω termination)

- Open channel**
- 10 kHz>91 dB
 - 100 kHz>71 dB
 - 1 MHz>51 dB
 - 10 MHz>32 dB

Dynamic Characteristics

Simultaneous drive limit

- PXI40 relays
- PXI Express64 relays

Relay operate time0.25 ms



Note Certain applications may require additional time for proper settling. Refer to the *NI Switches Help* for information about including additional settling time.

Release time0.25 ms

Typical relay life (no load)

- Mechanical1 × 10⁹ cycles
- Electrical (resistive, <10 pF load)
 - 10 V, 100 mA1 × 10⁷ cycles
 - 20 V, 500 mA5 × 10⁶ cycles
 - 100 V, 10 mA5 × 10⁵ cycles

To estimate reed relay lifetime, refer to the *Reed Relay Life* section of this document.



Note Optional series protection resistance, available for the terminal blocks, increases the expected relay life at higher voltages. This series protection resistance shields the reed relays from the effects of cable and load capacitance. For more information, refer to the *Reed Relay Protection* tutorial at ni.com/zone.



Note Reed relays are highly susceptible to damage caused by switching capacitive and inductive loads. Capacitive loads can cause high inrush currents while inductive loads can cause high flyback voltages. The addition of appropriate resistive protection can greatly improve contact lifetime. For more information about adding protection circuitry to a capacitive load, visit ni.com/info and enter the info code `relaylifetime`. For information about inductive loads, enter the Info Code `relayflyback`.



Note The relays used in the NI 2532 are field replaceable. Refer to the *NI Switches Help* for information about replacing a failed relay.

Trigger Characteristics

Input trigger

- SourcesPXI trigger lines 0–7
- Minimum pulse width150 ns



Note The NI 2532 can recognize trigger pulse widths <150 ns if you disable digital filtering. For information about disabling digital filtering, refer to the *NI Switches Help* at ni.com/manuals.

Output trigger

- DestinationsPXI trigger lines 0–7
- Pulse widthProgrammable
(1 μs to 62 μs)

Physical Characteristics

Relay typeReed



Note NI advises against installing reed relay modules directly adjacent to an embedded controller with a magnetic hard drive because of the sensitivity of reed relays and the possibility of interference.

Relay contact materialRhodium

I/O connectors2, 160 pos,
Samtec BTE-EM series



Note Terminal block connectivity is with standard 0.050 inch pitch headers. Refer to the [Accessories](#) section for more information.



Note Achieve the best performance by minimizing the number of I/O connector mating cycles.

Power requirement

PXI.....	10 W at 5 V 2 W at 3.3 V
PXI Express	15 W at 12V 2 W at 3.3 V

Dimensions (L × W × H) 3U, one slot,
PXI/cPCI module,
PXIe compatible
21.6 × 2.0 × 13.0 cm
(8.5 × 0.8 × 5.1 in.)

Weight..... 454 g (1 lb)

Environment

The NI 2532 is intended for indoor use only.

Operating temperature.....	0 °C to 55 °C
Storage temperature.....	-20 °C to 70 °C
Relative humidity	5% to 85%, noncondensing
Pollution Degree.....	2
Maximum altitude	2,000 m

Shock and Vibration

Operational shock..... 30 g peak, half-sine,
11 ms pulse
(Tested in accordance
with IEC 60068-2-27.
Test profile developed
in accordance with
MIL-PRF-28800F.)

Random vibration

Operating	5 to 500 Hz, 0.3 g _{rms}
Nonoperating	5 to 500 Hz, 2.4 g _{rms} (Tested in accordance with IEC 60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

Refer to Figure 1 for the power-on state diagram of the NI PXI/PXIe 2532.

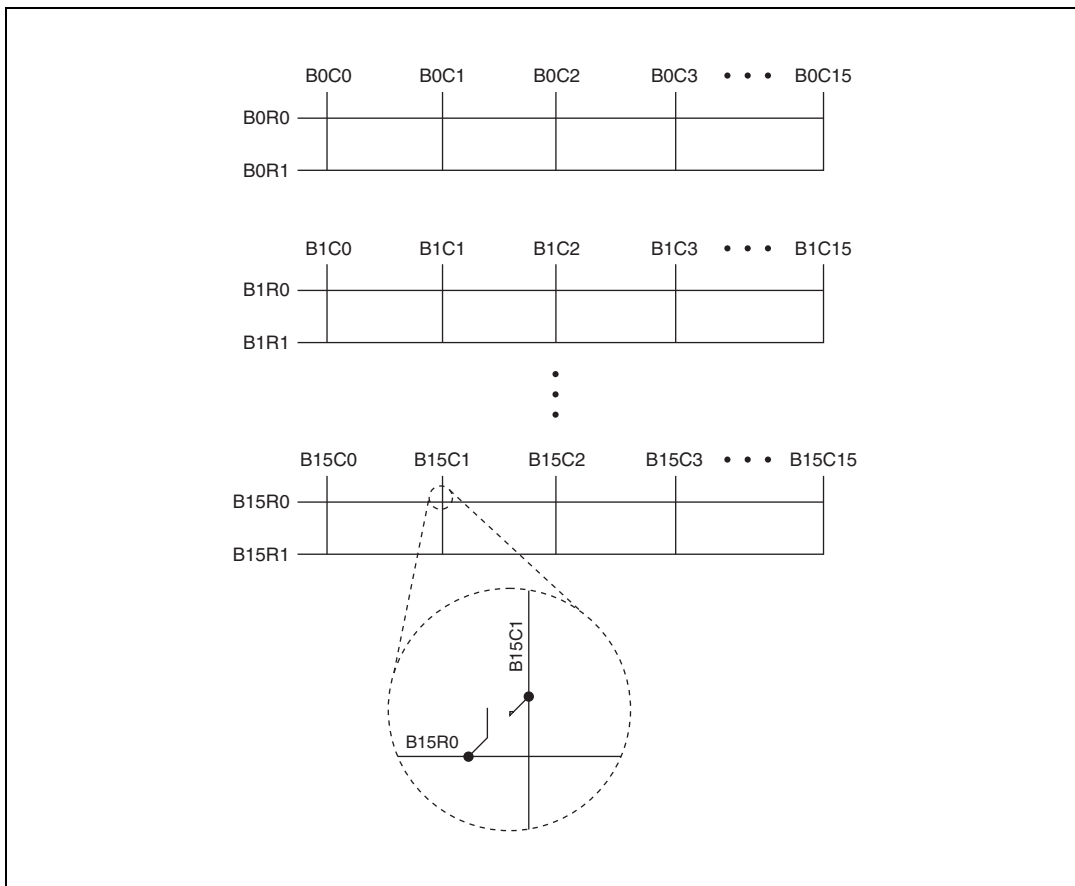


Figure 1. NI PXI/PXIe 2532 Configuration (Relay Shown in Power-On State)

The following figure shows the NI PXI/PXIe-2532 connector pinout for the left and right connectors.

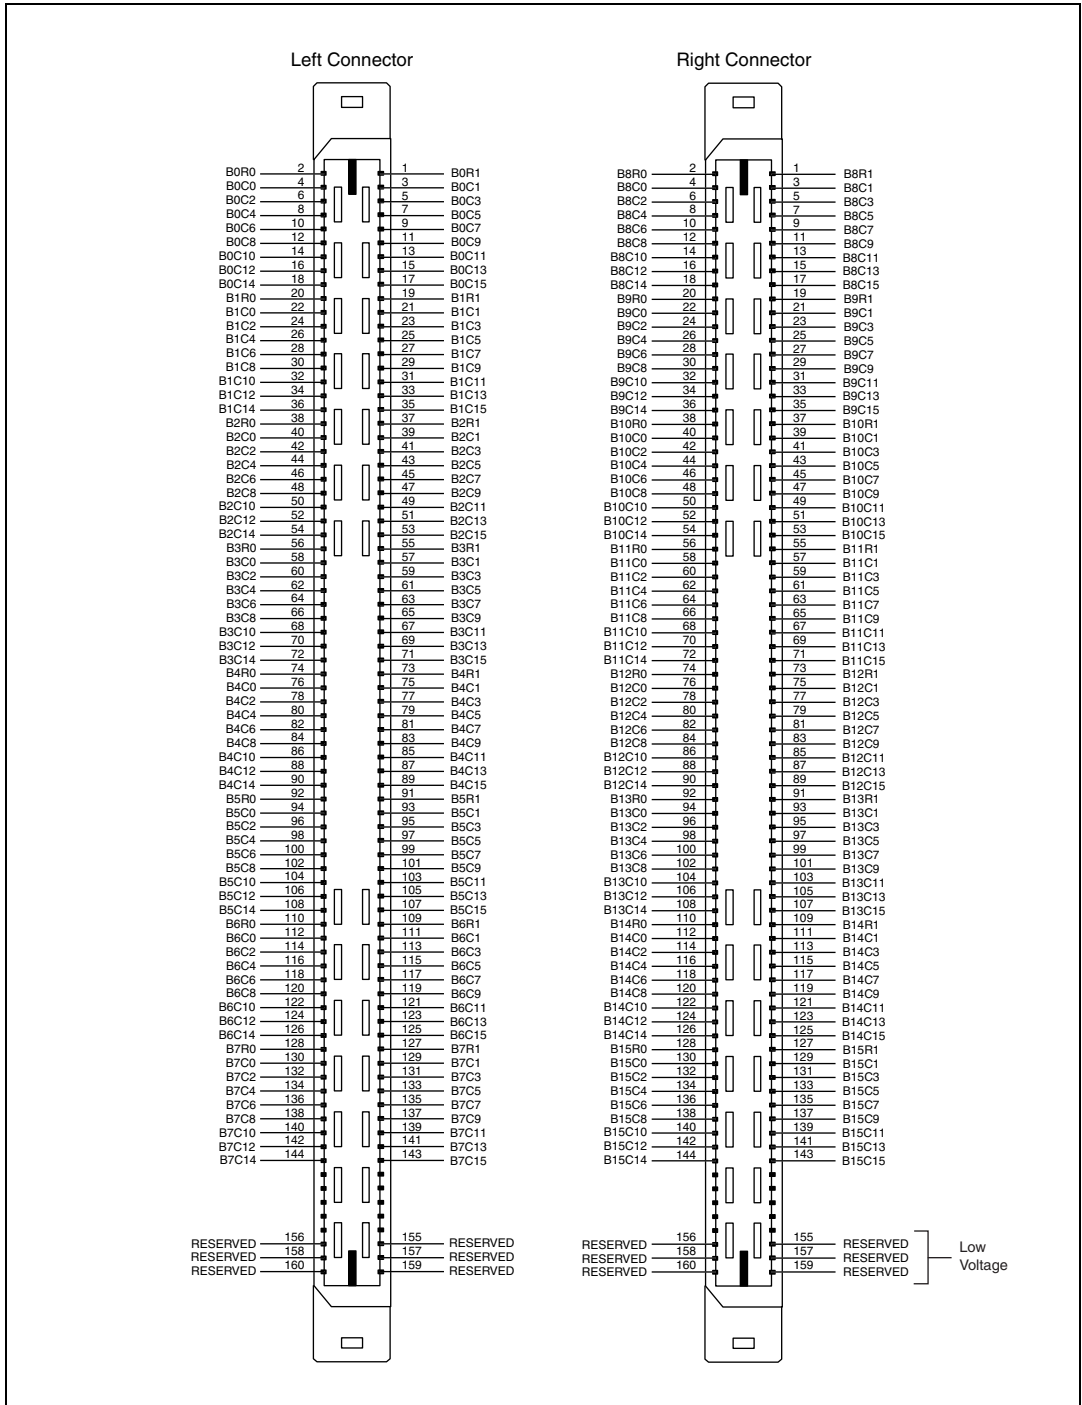


Figure 2. NI PXI/PXIe-2532 Connector Pinout



Note For topology-specific connection information, refer to your device in the *NI Switches Help* and the installation instructions for any associated cables or terminal blocks.



Note Refer to the terminal block installation instructions for signal connectivity and matrix expansion options. Contact NI for custom terminal block designs.

Accessories

Visit ni.com for more information about the following accessories.



Note The specifications listed in this document, including the safety and compliance certifications, also apply to the terminal blocks for the NI 2532 unless otherwise noted in the terminal block installation instructions.

Table 1. NI Accessories for the NI 2532

Accessory	Part Number
NI TB-2640 terminal block (1-wire 4 × 128 matrix)	779056-01
NI TB-2640 terminal block, with protection resistance	779056-02
NI TB-2641 terminal block (1-wire 8 × 64 matrix)	779056-03
NI TB-2641 terminal block, with protection resistance	779056-04
NI TB-2642 terminal block (1-wire 16 × 32 matrix)	779056-05
NI TB-2642 terminal block, with protection resistance	779056-06
NI TB-2643 terminal block (2-wire 4 × 64 matrix or 1-wire dual 4 × 64 matrix)	779056-07
NI TB-2643 terminal block, with protection resistance	779056-08
NI TB-2644 terminal block (2-wire 8 × 32 matrix or 1-wire dual 8 × 32 matrix)	779056-09
NI TB-2644 terminal block, with protection resistance	779056-10
NI TB-2645 terminal block (2-wire 16 × 16 matrix or 1-wire dual 16 × 16 matrix)	779056-11
NI TB-2645 terminal block, with protection resistance	779056-12

Table 2. Third-Party Accessory for the NI 2532

Accessory	Manufacturer	Manufacturer Part Number
Module mating connector*	Samtec	BSE-080-01-L-D-A
* PCB mount, additional cover or enclosure required. See previous safety caution.		



Note Third-party vendors offer mass-interconnect solutions for this module. Refer to Virginia Panel at www.vpc.com or MAC Panel at www.macpanel.com for connectivity offerings.



Caution You *must* install mating connectors according to local safety codes and standards and according to the specifications provided by the connector manufacturer. You are responsible for verifying safety compliance of third-party connectors and their usage according to the relevant standard(s), including UL and CSA in North America and IEC and VDE in Europe.

Reed Relay Life

Figure 3 shows the reed relay lifetime nomograph. The purpose of this graph is to estimate reed relay lifetime.



Note This nomograph is not meant to be an exact or guaranteed specification and should only be used as a guideline to estimate lifetime. Actual reed relay lifetimes may vary depending on application.

Complete the following steps to use this nomograph:

1. Determine the peak voltage experienced across the relay while switching and mark this value on the *Volts* line.
2. Determine the sum of the DUT, cable, and instrumentation capacitances and mark this value on the *Load Capacitance* line.
3. Draw a straight line between both values.

The intersection points of this line and the *No Protection* and *100 Ω Protection* axes are the corresponding estimated relay lifetimes in cycles. For more information on adding protection resistance, visit ni.com/info and enter the Info Code `relaylifetime`.

Refer to the following example and Figure 3 for an example application.

Example

The reed relay module is connected to a DMM via 1 meter of cable. The DMM and cable capacitances are 100 pF and 30 pF respectively. The maximum voltage switched across the relay is 50 volts. Determine the estimated number of relay cycles with and without protection resistance.

Solution

The total load capacitance is the sum of the cable and DMM capacitance, which is 130 pF. Draw a line between the 50V point on the *Volts* axis and 130 pF on the *Load Capacitance* axis.

The line drawn intersects the *Cycles* axes at approximately 500,000 on the *No Protection* axis and about 25,000,000 on the *100 Ω Protection* axis (refer to Figure 3). This series resistance should be placed as close as possible to the relay for maximum effect.

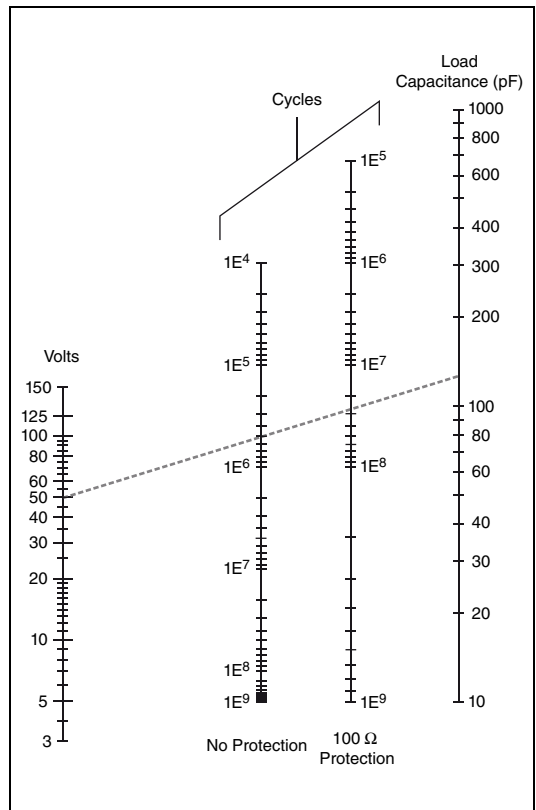


Figure 3. Reed Relay Lifetime Nomograph

Compliance and Certifications

Safety

This product meets the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1



Note For UL and other safety certifications, refer to the product label or the *Online Product Certification* section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note For EMC declarations and certifications, refer to the *Online Product Certification* section.

CE Compliance

This product meets the essential requirements of applicable European Directives as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2004/108/EC; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

To obtain product certifications and the Declaration of Conformity (DoC) for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *NI and the Environment* Web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all products *must* be sent to a WEEE recycling center. For more information about WEEE recycling centers, National Instruments WEEE initiatives, and compliance with WEEE Directive 2002/96/EC on Waste Electrical and Electronic Equipment, visit ni.com/environment/weee.

LabVIEW, National Instruments, NI, ni.com, the National Instruments corporate logo, and the Eagle logo are trademarks of National Instruments Corporation. Refer to the *Trademark Information* at ni.com/trademarks for other National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents.