

COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash  Get Credit  Receive a Trade-In Deal

OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



Bridging the gap between the manufacturer and your legacy test system.

 1-800-915-6216

 www.apexwaves.com

 sales@apexwaves.com

All trademarks, brands, and brand names are the property of their respective owners.

Request a Quote

 **CLICK HERE**

PXIe-5840

SPECIFICATIONS

PXIe-5840

Reconfigurable 6 GHz RF Vector Signal Transceiver with 1 GHz Bandwidth

Contents

| | |
|--|----|
| Definitions..... | 2 |
| Conditions..... | 3 |
| Frequency..... | 3 |
| Frequency Settling Time..... | 4 |
| Internal Frequency Reference..... | 4 |
| Spectral Purity..... | 5 |
| RF Input..... | 6 |
| RF Input Amplitude Range..... | 6 |
| RF Input Amplitude Settling Time..... | 7 |
| RF Input Absolute Amplitude Accuracy..... | 7 |
| RF Input Frequency Response..... | 8 |
| RF Input Average Noise Density..... | 9 |
| RF Input Spurious Responses..... | 10 |
| RF Input LO Residual Power..... | 11 |
| RF Input Residual Sideband Image..... | 12 |
| RF Output..... | 14 |
| RF Output Power Range..... | 14 |
| RF Output Amplitude Settling Time..... | 16 |
| RF Output Power Level Accuracy..... | 16 |
| RF Output Frequency Response..... | 17 |
| RF Output Average Noise Density..... | 19 |
| RF Output Spurious Responses..... | 20 |
| RF Output LO Residual Power..... | 22 |
| RF Output Residual Sideband Image..... | 23 |
| Error Vector Magnitude (EVM)..... | 25 |
| Application-Specific Modulation Quality..... | 27 |
| WLAN 802.11ax..... | 27 |
| WLAN 802.11ac..... | 31 |
| LTE..... | 33 |
| WCDMA..... | 34 |

| | |
|--|----|
| Baseband Characteristics..... | 34 |
| Onboard FPGA..... | 35 |
| Onboard DRAM..... | 35 |
| Onboard SRAM..... | 35 |
| Front Panel I/O..... | 35 |
| RF IN..... | 35 |
| RF OUT..... | 36 |
| LO OUT (RF IN and RF OUT)..... | 36 |
| LO IN (RF IN and RF OUT)..... | 37 |
| REF IN..... | 37 |
| REF OUT..... | 38 |
| PFI 0..... | 38 |
| DIGITAL I/O..... | 38 |
| Power Requirements..... | 41 |
| Calibration..... | 42 |
| Physical Characteristics..... | 42 |
| Environment..... | 42 |
| Operating Environment..... | 42 |
| Storage Environment..... | 42 |
| Shock and Vibration..... | 43 |
| Compliance and Certifications..... | 43 |
| Safety Compliance Standards..... | 43 |
| Electromagnetic Compatibility..... | 43 |
| CE Compliance..... | 44 |
| Product Certifications and Declarations..... | 44 |
| Environmental Management..... | 44 |

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the performance met by a majority of models.
- *Typical-95* specifications describe the performance met by 95% ($\approx 2\sigma$) of models with a 95% confidence.
- *Nominal* specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are *Warranted* unless otherwise noted.

Conditions

Warranted specifications are valid under the following conditions unless otherwise noted.

- Over ambient temperature range of 0 °C to 45 °C.
- 30 minutes warm-up time.
- Calibration cycle is maintained.
- Chassis fan speed is set to High. In addition, NI recommends using slot blockers and EMC filler panels in empty module slots to minimize temperature drift.
- Calibration IP is used properly during the creation of custom FPGA bitfiles.

Typical specifications do not include measurement uncertainty and are measured immediately after a device self-calibration is performed.

Unless otherwise noted, specifications assume the PXIe-5840 is configured in the following default mode of operation:

- Reference Clock source: Internal
- RF IN reference level: 0 dBm
- RF IN preamplifier: AUTO
- RF OUT power level: 0 dBm
- LO tuning mode: Fractional
- LO PLL loop bandwidth: Low
- LO step size: 500 kHz
- LO frequency: 2.4 GHz
- LO source: Internal



Note Within the specifications, *self-calibration* °C refers to the recorded device temperature of the last successful self-calibration. You can read the self-calibration temperature from the device using the appropriate software functions.

Frequency

The following characteristics are common to both RF IN and RF OUT ports.

Frequency range 9 kHz to 6 GHz

Table 1. PXIe-5840 Bandwidth

| Center Frequency | Instantaneous Bandwidth |
|--------------------|-------------------------|
| 9 kHz to <120 MHz | <120 MHz |
| 120 MHz to 410 MHz | 50 MHz |

Table 1. PXIe-5840 Bandwidth (Continued)

| Center Frequency | Instantaneous Bandwidth |
|---|-------------------------|
| >410 MHz to 650 MHz | 100 MHz |
| >650 MHz to 1.3 GHz | 200 MHz |
| >1.3 GHz to 2.2 GHz | 500 MHz |
| >2.2 GHz to 6 GHz | 1 GHz |
| The PXIe-5840 uses the low frequency subsystem to directly acquire or generate the RF signal below 120 MHz. | |

| | |
|--------------------------------|---|
| Tuning resolution ¹ | 888 nHz |
| LO step size | |
| Fractional mode | Programmable step size, 500 kHz default |
| Integer mode ² | |
| LO ≤ 4 GHz | 10 MHz, 25 MHz, 50 MHz, 100 MHz |
| LO > 4 GHz | 20 MHz, 50 MHz, 100 MHz, 200 MHz |

Frequency Settling Time

Table 2. Maximum Frequency Settling Time

| Settling Time | Maximum Time (ms) |
|---|-------------------|
| $\leq 1 \times 10^{-6}$ of final frequency | 0.38 |
| $\leq 0.1 \times 10^{-6}$ of final frequency | 0.40 |
| This specification includes only frequency settling and excludes any residual amplitude settling. | |

Internal Frequency Reference

| | |
|-----------------------------|----------------------------------|
| Initial adjustment accuracy | $\pm 200 \times 10^{-9}$ |
| Temperature stability | $\pm 1 \times 10^{-6}$, maximum |

¹ Tuning resolution combines LO step size capability and frequency shift DSP implemented on the FPGA.

² Larger step sizes in integer mode improves phase noise performance.

| | |
|----------|--|
| Aging | $\pm 1 \times 10^{-6}$ per year, maximum |
| Accuracy | <i>Initial adjustment accuracy</i> \pm <i>Aging</i> \pm <i>Temperature stability</i> |




Note For more information about using an external frequency reference or sharing the internal frequency reference, refer to the [REF IN](#) and [REF OUT](#) sections.

Spectral Purity

Table 3. Single Sideband Phase Noise

| Frequency | Phase Noise (dBc/Hz, Single Sideband), 20 kHz Offset, Self-Calibration °C \pm 10 °C |
|-----------------|---|
| <3 GHz | -102 |
| 3 GHz to 4 GHz | -102 |
| >4 GHz to 6 GHz | -96 |

Figure 1. Measured Phase Noise³ at 900 MHz, 2.4 GHz, and 5.8 GHz

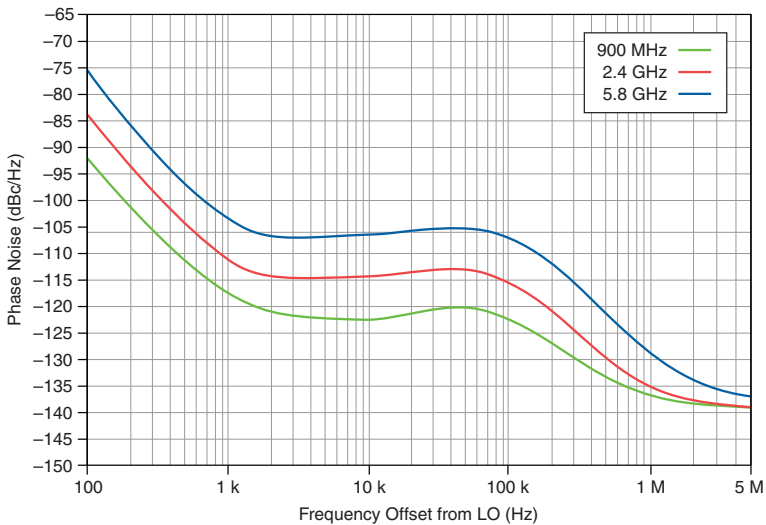

³ Conditions: Measured Port: LO OUT; Reference Clock: internal, phase noise spurs not shown.

RF Input

RF Input Amplitude Range

Table 4. Input Amplitude Range

| Center Frequency | Preamp | RF Input (dB) |
|-------------------|----------|---|
| 9 kHz to <120 MHz | Disabled | Average noise level to +15 dBm (CW RMS) |
| | Auto | |
| 120 MHz to 6 GHz | Disabled | Average noise level to +30 dBm (CW RMS) |
| | Auto | |
| | Enabled | Average noise level to -10 dBm (CW RMS) |

RF gain resolution

1 dB, nominal

Table 5. Input RF Analog Gain Range, Preamp Auto, Nominal

| Center Frequency | RF Analog Gain Range (dB) |
|---------------------|---------------------------|
| 10 MHz to <120 MHz | ≥ 35 |
| 120 MHz to 500 MHz | ≥ 65 |
| >500 MHz to 1.5 GHz | ≥ 65 |
| >1.5 GHz to 2.3 GHz | ≥ 60 |
| >2.3 GHz to 2.9 GHz | ≥ 60 |
| >2.9 GHz to 4.8 GHz | ≥ 55 |
| >4.8 GHz to 6 GHz | ≥ 50 |

Table 6. Input RF Analog Gain Range, Preamp Enabled, Nominal

| Center Frequency | RF Analog Gain Range (dB) |
|---------------------|---------------------------|
| 120 MHz to 500 MHz | ≥ 40 |
| >500 MHz to 1.5 GHz | ≥ 35 |
| >1.5 GHz to 2.3 GHz | ≥ 30 |
| >2.3 GHz to 2.9 GHz | ≥ 30 |

Table 6. Input RF Analog Gain Range, Preamp Enabled, Nominal (Continued)

| Center Frequency | RF Analog Gain Range (dB) |
|---------------------|---------------------------|
| >2.9 GHz to 4.8 GHz | ≥25 |
| >4.8 GHz to 6 GHz | ≥25 |

RF Input Amplitude Settling Time⁴

<0.5 dB of final value 40 μs, typical

<0.1 dB of final value 70 μs, typical

RF Input Absolute Amplitude Accuracy

Table 7. Input Absolute Amplitude Accuracy (dB)

| Center Frequency | Specification | 2σ | Typical |
|---------------------|---------------|-------|---------|
| 10 MHz to <120 MHz | ±0.75 | ±0.55 | ±0.35 |
| 120 MHz to 500 MHz | ±0.80 | ±0.65 | ±0.50 |
| >500 MHz to 1.5 GHz | ±0.70 | ±0.55 | ±0.40 |
| >1.5 GHz to 2.3 GHz | ±0.75 | ±0.60 | ±0.45 |
| >2.3 GHz to 2.9 GHz | ±0.65 | ±0.50 | ±0.35 |
| >2.9 GHz to 4.8 GHz | ±0.75 | ±0.55 | ±0.40 |
| >4.8 GHz to 6 GHz | ±0.90 | ±0.60 | ±0.45 |

Conditions: Reference level -30 dBm to +30 dBm; measured at 3.75 MHz offset from the configured center frequency; measurement performed after the PXIe-5840 has settled. Preamplifier mode set to automatic.

This specification is valid only when the module is operating within the specified ambient temperature range and within ±10 °C from the last self-calibration temperature, as measured with the onboard temperature sensors.

⁴ Constant RF input signal, varying input reference level.

RF Input Frequency Response

Table 8. Input Frequency Response (dB), Equalized

| Center Frequency | NI-RFSA Device Instantaneous Bandwidth | Frequency Response (dB) |
|--|--|-------------------------|
| ≥250 MHz to 410 MHz | 50 MHz | ±0.90 |
| | | ±0.50, typical |
| >410 MHz to 650 MHz | 100 MHz | ±0.75 |
| | | ±0.50, typical |
| >650 MHz to 1.5 GHz | 200 MHz | ±1.00 |
| | | ±0.65, typical |
| >1.5 GHz to 2.2 GHz | 200 MHz | ±1.30 |
| | | ±0.70, typical |
| >2.2 GHz to 2.9 GHz | 200 MHz | ±1.00 |
| | 1 GHz | ±0.55, typical |
| >2.9 GHz to 4.8 GHz | 200 MHz | ±1.80, typical |
| | 1 GHz | ±1.00 |
| >4.8 GHz to 6 GHz | 200 MHz | ±0.65, typical |
| | 1 GHz | ±2.00, typical |
| >4.8 GHz to 6 GHz | 200 MHz | ±1.00 |
| | 1 GHz | ±0.65, typical |
| >4.8 GHz to 6 GHz | 200 MHz | ±1.00 |
| | 1 GHz | ±0.65, typical |
| <p>Conditions: Reference level -30 dBm to +30 dBm; module temperature within ± 5 °C of last self-calibration temperature.</p> <p>Frequency response is defined as the maximum relative amplitude deviation from the reference offset frequency. For the PXIe-5840 RF Input the reference offset frequency is 3.75 MHz. For the absolute amplitude accuracy at the reference offset, refer to the RF Input Absolute Amplitude Accuracy section.</p> | | |

Figure 2. Measured 200 MHz Input Frequency Response, 0 dBm Reference Level, Equalized


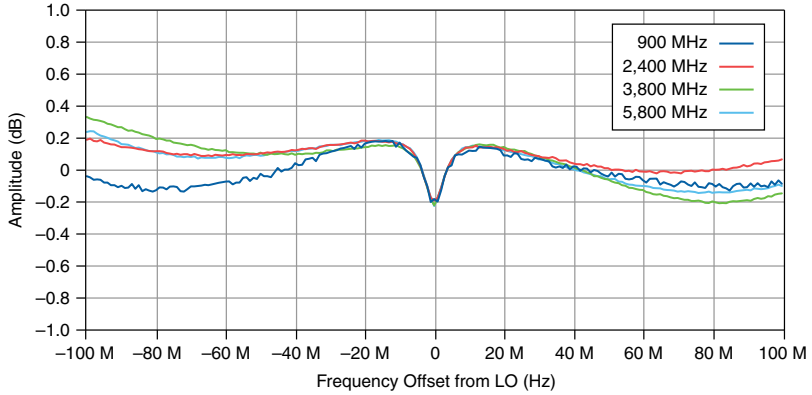


Figure 3. Measured 1 GHz Input Frequency Response, 0 dBm Reference Level, Equalized

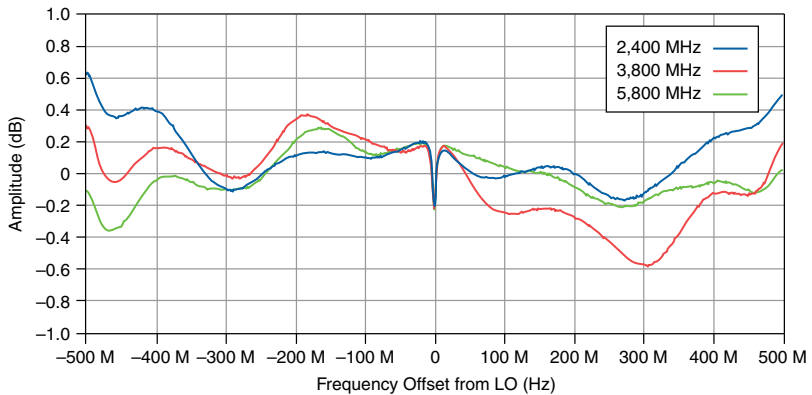

RF Input Average Noise Density

Table 9. Input Average Noise Density (dBm/Hz), Typical

| Frequency Range | -50 dBm Reference Level | -10 dBm Reference Level |
|---------------------|-------------------------|-------------------------|
| >120 MHz to 500 MHz | -161 | -140 |
| >500 MHz to 3.4 GHz | -164 | -150 |
| >3.4 GHz to 4.5 GHz | -163 | -148 |

Table 9. Input Average Noise Density (dBm/Hz), Typical (Continued)

| Frequency Range | -50 dBm Reference Level | -10 dBm Reference Level |
|---------------------|-------------------------|-------------------------|
| >4.5 GHz to 6.0 GHz | -161 | -149 |

Conditions: Input terminated with a 50 Ω load; 50 averages; noise integrated and normalized to 1 Hz bandwidth. The -50 dBm reference level configuration has the preamplifier enabled for high sensitivity. The -10 dBm reference level configuration has the preamplifier disabled for optimized linearity.

RF Input Spurious Responses

RF Input Third-Order Input Intermodulation

Table 10. Third-Order Input Intercept Point (IIP₃), -5 dBm Reference Level, Typical

| Frequency Range | IIP ₃ (dBm) |
|---------------------|------------------------|
| 120 MHz to 600 MHz | 23 |
| >600 MHz to 1.4 GHz | 21 |
| >1.4 GHz to 4.0 GHz | 24 |
| >4.0 GHz to 5.1 GHz | 19 |
| >5.1 GHz to 6.0 GHz | 16 |

Conditions: Two -10 dBm tones, 700 kHz separation at RF IN; preamp disabled; reference level: -5 dBm.

Table 11. Third-Order Input Intercept Point (IIP₃), -20 dBm Reference Level, Typical

| Frequency Range | IIP ₃ (dBm) |
|---------------------|------------------------|
| 120 MHz to 200 MHz | 7 |
| >200 MHz to 4.0 GHz | 9 |
| >4.0 GHz to 5.1 GHz | 4 |
| 5.1 GHz to 6.0 GHz | 1 |


Conditions: Two -25 dBm tones, 700 kHz separation at RF IN; preamp enabled; reference level: -20 dBm.

RF Input Nonharmonic Spurs

Table 12. Input Nonharmonic Spurs (dBc), Typical

| LO Frequency | 10 kHz ≤ Offset < 100 kHz | 100 kHz ≤ Offset < 1 MHz | 1 MHz ≤ Offset ⁵ |
|---------------------|---------------------------|--------------------------|-----------------------------|
| >120 MHz to 410 MHz | -65 | -64 | -60 |
| >410 MHz to 750 MHz | -65 | -65 | -66 |
| >750 MHz to 2.2 GHz | -63 | -63 | -72 |
| >2.2 GHz to 4.5 GHz | -57 | -60 | -68 |
| >4.5 GHz to 6 GHz | -49 | -50 | -63 |

Conditions: Reference level 0 dBm. Preamp disabled. Measured with a single tone, -6 dBr, where dBr is referenced to the configured RF reference level.

 **Note** Offset refers to ± desired signal offset (Hz) around the current LO frequency.

RF Input LO Residual Power

Table 13. Input LO Residual Power (dBr⁶), Typical

| Center Frequency | Reference Level | |
|---------------------|--------------------|--------------------|
| | -30 dBm to -20 dBm | -20 dBm to +30 dBm |
| ≥120 MHz to 410 MHz | -42 | -42 |
| >410 MHz to 2.2 GHz | -47 | -60 |
| >2.2 GHz to 4 GHz | -55 | -57 |
| >4 GHz to 6 GHz | -45 | -48 |


Conditions: LO Residual Power averaged across a maximum of 200 MHz bandwidth using the internal LO of the PXIe-5840. Input tone power at a maximum of -6 dBr.

The PXIe-5840 uses the low frequency subsystem to directly acquire the RF input signal below 120 MHz.

⁵ The maximum offset is limited to within the equalized bandwidth of the referenced LO Frequency.

⁶ dBr is relative to the full scale of the configured RF reference level.

Figure 4. Input LO Residual Power, Typical

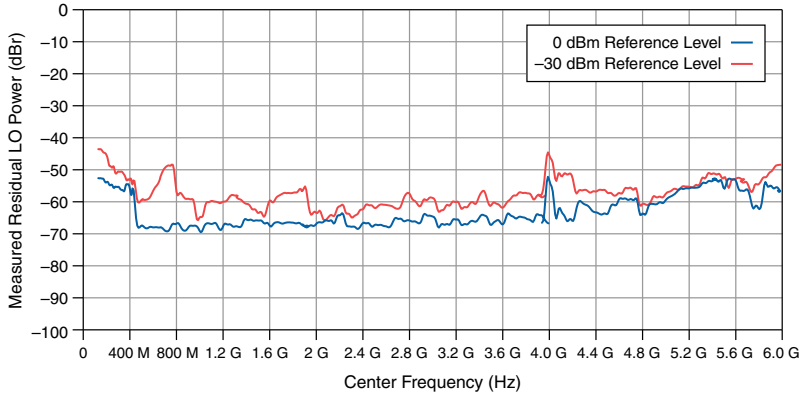

RF Input Residual Sideband Image

Table 14. Input Residual Sideband Image (dBc), Typical

| Center Frequency | NI-RFSA Device Instantaneous Bandwidth Setting | Input Bandwidth ⁷ | Residual Sideband Image (dBc) |
|---------------------|--|------------------------------|-------------------------------|
| ≥120 MHz to 410 MHz | 50 MHz | 50 MHz | -50 |
| >410 MHz to 650 MHz | 100 MHz | 100 MHz | -50 |
| >650 MHz to 1.3 GHz | 200 MHz | 200 MHz | -55 |
| >1.3 GHz to 2.2 GHz | 200 MHz | 200 MHz | -55 |
| | | 500 MHz | -53 |
| >2.2 GHz to 5 GHz | 1 GHz | 200 MHz | -57 |
| | | 200 MHz | -50 |
| | | 1 GHz | -45 |

⁷ The Input Bandwidth describes the occupied bandwidth of the input signal centered at the center frequency.

Table 14. Input Residual Sideband Image (dBc), Typical (Continued)


| Center Frequency | NI-RFSA Device Instantaneous Bandwidth Setting | Input Bandwidth ⁷ | Residual Sideband Image (dBc) |
|------------------|--|------------------------------|-------------------------------|
| >5 GHz to 6 GHz | 200 MHz | 200 MHz | -50 |
| | 1 GHz | 200 MHz | -50 |
| | | 1 GHz | -45 |

Conditions: Reference levels -30 dBm to +30 dBm.

The PXIe-5840 uses the low frequency subsystem to directly acquire the RF signal below 120 MHz.


This specification describes the maximum residual sideband image within the device bandwidth centered around a given RF center frequency.

Figure 5. Input Residual Sideband Image, 0 dBm Reference Level, Measured

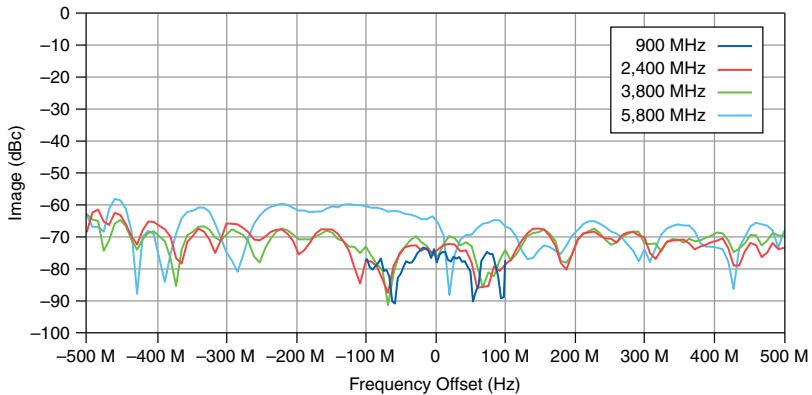

⁷ The Input Bandwidth describes the occupied bandwidth of the input signal centered at the center frequency.

Figure 6. Input Residual Sideband Image, -30 dBm Reference Level, Measured

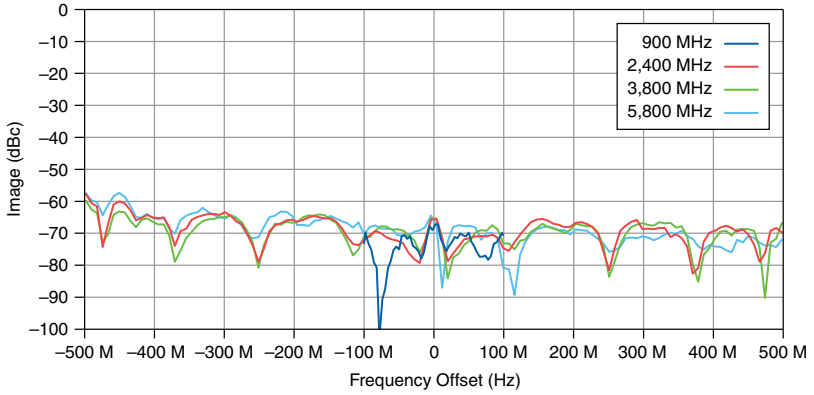

RF Output

RF Output Power Range

Table 15. Output Power Range

| NI-RFSG Bandwidth Setting | Frequency | Power Range, CW, Average Power | |
|---------------------------|-------------------|--------------------------------|-------------------------|
| | | Specification | Nominal |
| <120 MHz | 9 kHz to <120 MHz | Noise floor to +5 dBm | Noise Floor to +8 dBm |
| ≤200 MHz | 120 MHz to 4 GHz | Noise floor to +18 dBm | Noise Floor to ≥+20 dBm |
| | >4 GHz to 6 GHz | Noise Floor to +15 dBm | Noise Floor to ≥+17 dBm |

Table 15. Output Power Range (Continued)


| NI-RFSG Bandwidth Setting | Frequency | Power Range, CW, Average Power | |
|---------------------------|-------------------|--------------------------------|-------------------------|
| | | Specification | Nominal |
| 1 GHz | ≥2.2 GHz to 4 GHz | Noise Floor to +18 dBm | Noise Floor to ≥+20 dBm |
| | >4 GHz to 6 GHz | Noise Floor to +10 dBm | Noise Floor to ≥+15 dBm |

The power range refers to CW average power. For modulated signal generation, it is important to consider the impact of peak to average power ratio (PAPR). For example, a modulated 20 MHz signal between 120 MHz to 4 GHz with a 12 dB PAPR can be generated with up to +6 dBm (+8 dBm nominal) average modulated power.

Output attenuator resolution 1 dB, nominal

Digital attenuation resolution⁸ <0.1 dB

Figure 7. Output Maximum CW Average Power (dB), Measured

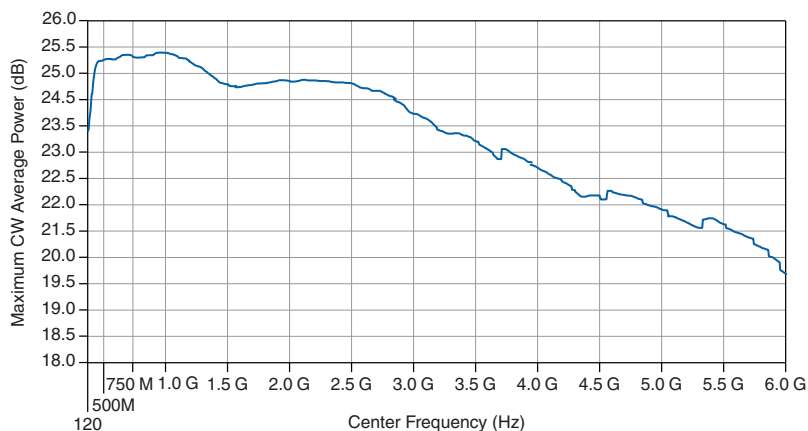

Related Information

Refer to the [Considering Average Power and Crest Factor](#) topic of the [NI RF Vector Signal Transceivers Help](#) for more information about modulated signal power.

⁸ Average output power ≥ -100 dBm.

RF Output Amplitude Settling Time⁹

<0.5 dB of final value

60 μ s, typical

<0.1 dB of final value

85 μ s, typical

RF Output Power Level Accuracy

Table 16. Output Power Level Accuracy (dB)

| Center Frequency | Specification | 2 σ | Typical |
|---------------------|---------------|------------|------------|
| >200 MHz to 500 MHz | ± 0.8 | ± 0.6 | ± 0.45 |
| >500 MHz to 1.5 GHz | ± 0.7 | ± 0.6 | ± 0.45 |
| >1.5 GHz to 2.3 GHz | ± 0.7 | ± 0.6 | ± 0.45 |
| >2.3 GHz to 2.9 GHz | ± 0.7 | ± 0.6 | ± 0.45 |
| >2.9 GHz to 4.8 GHz | ± 0.85 | ± 0.65 | ± 0.5 |
| >4.8 GHz to 6 GHz | ± 0.9 | ± 0.7 | ± 0.55 |

Conditions: For frequencies 2.3 GHz and below, Power Level -30 dBm to +15 dBm; for frequencies greater than 2.3 GHz, Power Level -50 dBm to +15 dBm; measured at 3.75 MHz offset from the configured center frequency; measurement performed after the PXIe-5840 has settled.

This specification is valid only when the module is operating within the specified ambient temperature range and within ± 10 °C from the last self-calibration temperature, as measured with the onboard temperature sensors.

This specification requires that temperature correction is being performed. Temperature correction is applied automatically if

`NIRFSG_ATTR_AUTOMATIC_THERMAL_CORRECTION` is enabled (default).

Temperature correction is applied if necessary only when NI-RFSG settings are adjusted. If `NIRFSG_ATTR_AUTOMATIC_THERMAL_CORRECTION` is disabled, the `niRFSG_PerformThermalCorrection` must be explicitly called.

⁹ Varying RF output power range.

Figure 8. Output Relative Power Accuracy, 10 MHz to <120 MHz, -50 dBm to +5 dBm, Nominal¹⁰


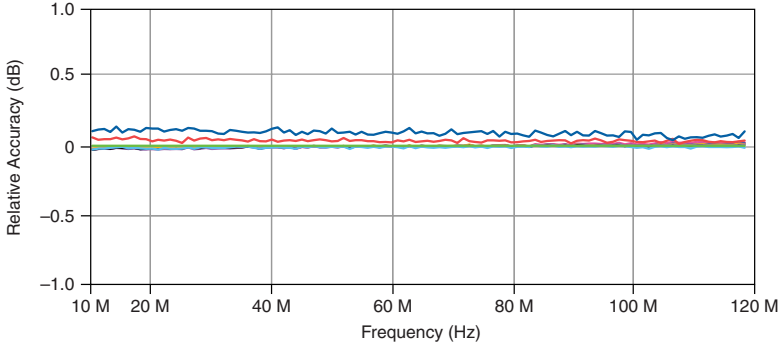


Figure 9. Output Relative Power Accuracy, 120 MHz to 6 GHz, -50 dBm to +15 dBm, Nominal¹⁰

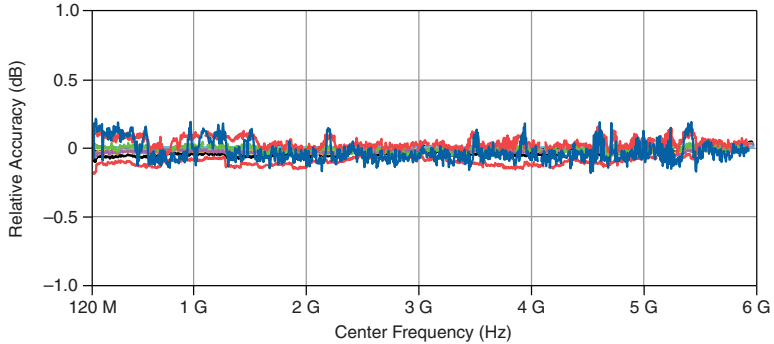

RF Output Frequency Response

Table 17. Output Frequency Response (dB) (Equalized)

| Center Frequency | NI-RFSG Signal Bandwidth Setting | Frequency Response (dB) |
|---------------------|----------------------------------|-------------------------|
| ≥250 MHz to 410 MHz | 50 MHz | ±0.90 |
| | | ±0.55, typical |

¹⁰ RF Front end configured to maximum +5 dBm (<120 MHz) and +15 dBm (120 MHz to 6 GHz). Signal level attenuated digitally.

Table 17. Output Frequency Response (dB) (Equalized) (Continued)

| Center Frequency | NI-RFSG Signal Bandwidth Setting | Frequency Response (dB) |
|--|----------------------------------|-------------------------|
| >410 MHz to 650 MHz | 100 MHz | ±1.10 |
| | | ±0.55, typical |
| >650 MHz to 1.5 GHz | 200 MHz | ±2.00 |
| | | ±1.20, typical |
| >1.5 GHz to 2.2 GHz | 200 MHz | ±1.40 |
| | | ±0.80, typical |
| >2.2 GHz to 2.9 GHz | 200 MHz | ±1.40 |
| | | ±0.80, typical |
| | 1 GHz | ±2.00, typical |
| >2.9 GHz to 4.8 GHz | 200 MHz | ±2.20 |
| | | ±1.20, typical |
| | 1 GHz | ±3.3, typical |
| >4.8 GHz to 6 GHz | 200 MHz | ±2.20 |
| | | ±1.25, typical |
| | 1 GHz | ±3.00, typical |
| <p>Conditions: Output peak power level -30 dBm to +15 dBm; module temperature within ±5 °C of last self-calibration temperature.</p> <p>Frequency response is defined as the maximum relative amplitude deviation from the reference offset frequency. For the PXIe-5840 RF Input the reference offset frequency is 3.75 MHz. For the absolute amplitude accuracy at the reference offset, refer to the <i>RF Output Power Level Accuracy</i> section.</p> | | |

Figure 10. Measured 200 MHz Output Frequency Response, 0 dBm Output Power Level, Equalized


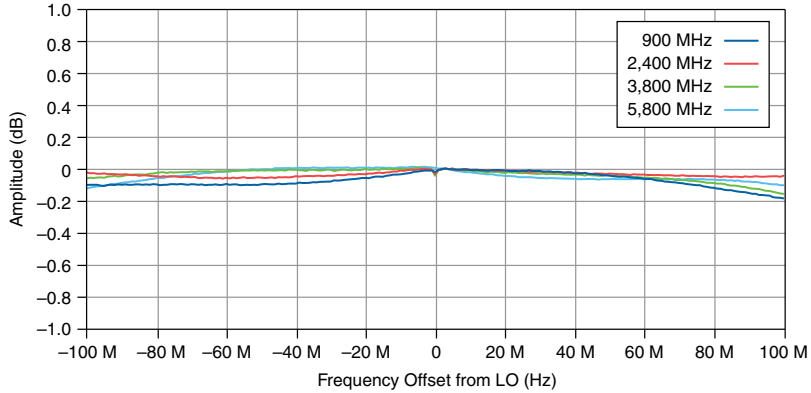


Figure 11. Measured 1 GHz Output Frequency Response, 0 dBm Output Power Level, Equalized

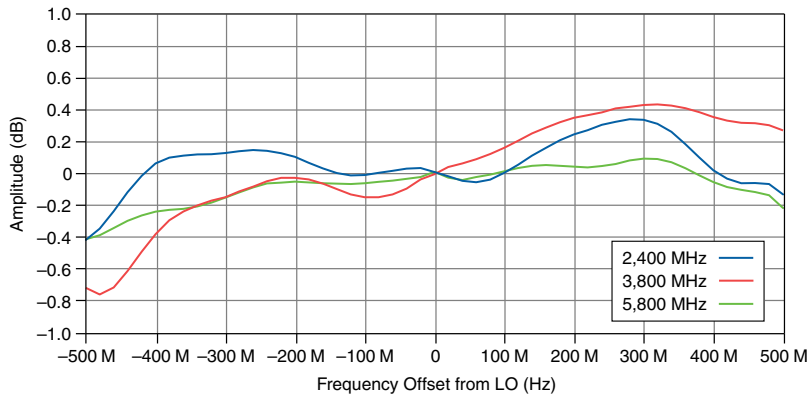

RF Output Average Noise Density

Table 18. Output Average Noise Density (dBm/Hz), Typical

| Center Frequency | Output Power Level (Peak) | | |
|---------------------|---------------------------|-------|--------|
| | -30 dBm | 0 dBm | 10 dBm |
| 10 MHz to 120 MHz | -145 | -147 | — |
| >120 MHz to 600 MHz | -167 | -149 | -137 |

Table 18. Output Average Noise Density (dBm/Hz), Typical (Continued)

| Center Frequency | Output Power Level (Peak) | | |
|---------------------|---------------------------|-------|--------|
| | -30 dBm | 0 dBm | 10 dBm |
| >600 MHz to 2.2 GHz | -165 | -151 | -140 |
| >2.2 GHz to 3.0 GHz | -165 | -143 | -134 |
| >3.0 GHz to 5.0 GHz | -164 | -148 | -138 |
| >5.0 GHz to 6.0 GHz | -163 | -142 | -133 |

Conditions: 50 averages; -40 dB baseband signal attenuation; noise measurement frequency offset 4 MHz relative to output frequency.

RF Output Spurious Responses

RF Output Third-Order Intermodulation

Table 19. Third-Order Output Intermodulation Distortion (IMD₃) (dBc), -6 dBm Tones, Typical

| Fundamental Frequency | Baseband DAC: -2 dBFS | Baseband DAC: -6 dBFS |
|-----------------------|-----------------------|-----------------------|
| 1 MHz to 100 MHz | -75 | -75 |
| >100 MHz to 2.0 GHz | -45 | -50 |
| >2.0 GHz to 2.7 GHz | -49 | -54 |
| >2.7 GHz to 4.0 GHz | -46 | -59 |
| >4.0 GHz to 5.0 GHz | -42 | -59 |
| >5.0 GHz to 6.0 GHz | -50 | -56 |

Conditions: -6 dBm tones with 700 kHz separation at RF OUT. Output power level set to achieve the desired output power per tone allowing specified digital headroom.

Table 20. Third-Order Output Intermodulation Distortion (IMD₃) (dBc), -36 dBm Tones, Typical

| Fundamental Frequency | Baseband DAC: -2 dBFS | Baseband DAC: -6 dBFS |
|-----------------------|-----------------------|-----------------------|
| 1 MHz to 100 MHz | -71 | -72 |
| >100 MHz to 1.0 GHz | -52 | -60 |

Table 20. Third-Order Output Intermodulation Distortion (IMD₃) (dBc), -36 dBm Tones, Typical (Continued)

| Fundamental Frequency | Baseband DAC: -2 dBFS | Baseband DAC: -6 dBFS |
|-----------------------|-----------------------|-----------------------|
| >1.0 GHz to 2.7 GHz | -56 | -64 |
| >2.7 GHz to 5.0 GHz | -54 | -60 |
| >5.0 GHz to 6.0 GHz | -53 | -57 |

Conditions: -36 dBm tones with 700 kHz separation at RF OUT. Output power level set to achieve the desired output power per tone allowing specified digital headroom.

RF Output Harmonics

Table 21. Output Second Harmonic Level (dBc), Typical

| Frequency Range | CW Average Power | |
|---------------------|------------------|--------|
| | 6 dBm | 15 dBm |
| 10 MHz to 120 MHz | -50 | N/A |
| >120 MHz to 200 MHz | -34 | -32 |
| >200 MHz to 1.4 GHz | -34 | -32 |
| >1.4 GHz to 2.7 GHz | -30 | -32 |
| >2.7 GHz to 6.0 GHz | -39 | -32 |

Conditions: Measured using a -1 dBFS baseband signal with 1 MHz offset.


RF Output Nonharmonic Spurs

Table 22. Output Nonharmonic Spurs (dBc), Typical

| Frequency | 10 kHz ≤ Offset < 100 kHz | 100 kHz ≤ Offset < 1 MHz | 1 MHz ≤ Offset ¹¹ |
|-----------------------|------------------------------|-----------------------------|------------------------------|
| >120 MHz to 460 MHz | <-80 | <-80 | <-60 |
| >460 MHz to 1.35 GHz | <-75 | <-75 | <-65 |
| >1.35 GHz to 2.25 GHz | <-75 | <-70 | <-63 |
| >2.25 GHz to 4.5 GHz | <-65 | <-63 | <-62 |

¹¹ The maximum offset is limited to within the equalized bandwidth of the referenced LO Frequency.

Table 22. Output Nonharmonic Spurs (dBc), Typical (Continued)

| Frequency | 10 kHz \leq Offset < 100 kHz | 100 kHz \leq Offset < 1 MHz | 1 MHz \leq Offset ¹¹ |
|--|-----------------------------------|----------------------------------|-----------------------------------|
| >4.5 GHz to 6 GHz | <-55 | <-56 | <-61 |
| Conditions : Output full scale level 0 dBm. Measured with a single tone at 0 dBFS. | | | |
|  Note Offset refers to \pm desired signal offset (Hz) around the current LO frequency. | | | |


RF Output LO Residual Power

Table 23. Output LO Residual Power (dBc), Typical

| Center Frequency | LO Residual Power |
|---|-------------------|
| \geq 120 MHz to 410 MHz | -50 |
| >410 MHz to 2.2 GHz | -52 |
| >2.2 GHz to 4 GHz | -54 |
| >4 GHz to 6 GHz | -51 |
| Conditions: LO Residual Power averaged across a maximum of 200 MHz bandwidth using the internal LO of the PXIe-5840. Peak output power -30 dBm to +15 dBm; tone at -6 dBFS. | |
| The PXIe-5840 uses the low frequency subsystem to directly generate the RF signal below 120 MHz. | |

¹¹ The maximum offset is limited to within the equalized bandwidth of the referenced LO Frequency.

Figure 12. Output LO Residual Power, Typical

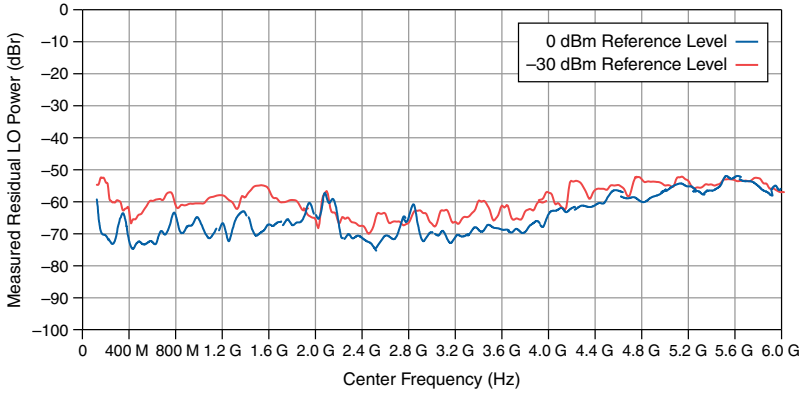

RF Output Residual Sideband Image

Table 24. Output Residual Sideband Image (dBc), Typical

| Center Frequency | NI-RFSG Signal Bandwidth Setting | Output Bandwidth ¹² | Residual Sideband Image |
|---------------------|----------------------------------|--------------------------------|-------------------------|
| ≥120 MHz to 410 MHz | 50 MHz | 50 MHz | -40 |
| >410 MHz to 650 MHz | 100 MHz | 100 MHz | -55 |
| >650 MHz to 1.3 GHz | 200 MHz | 200 MHz | -48 |
| >1.3 GHz to 2.2 GHz | 500 MHz | 200 MHz | -47 |
| | | 500 MHz | -45 |
| >2.2 GHz to 5 GHz | 200 MHz | 200 MHz | -50 |
| | | 200 MHz | -48 |
| | 1 GHz | 1 GHz | -45 |

¹² Output Bandwidth describes the occupied bandwidth of the generated signal centered at the center frequency.

Table 24. Output Residual Sideband Image (dBc), Typical (Continued)


| Center Frequency | NI-RFSG Signal Bandwidth Setting | Output Bandwidth ¹² | Residual Sideband Image |
|------------------|----------------------------------|--------------------------------|-------------------------|
| >5 GHz to 6 GHz | 200 MHz | 200 MHz | -45 |
| | 1 GHz | 200 MHz | -45 |
| | | 1 GHz ¹³ | -40 |

Conditions: Peak output power levels -30 dBm to +15 dBm.

The PXIe-5840 uses the low frequency subsystem to directly generate the RF signal below 120 MHz.

This specification describes the maximum residual sideband image within the device bandwidth centered around a given RF center frequency.


Figure 13. Output Residual Sideband Image, 0 dBm Average Output Power, Measured

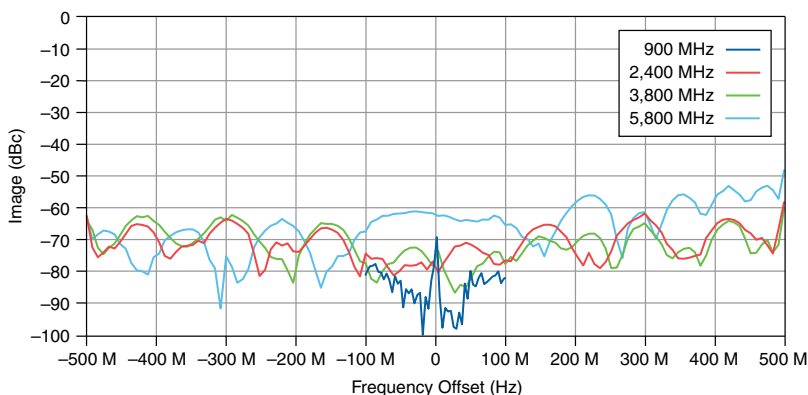

¹² Output Bandwidth describes the occupied bandwidth of the generated signal centered at the center frequency.

¹³ Image performance degrades for center frequencies greater than 5.9 GHz for reference levels above 0 dBm.

Figure 14. Output Residual Sideband Image, -30 dBm Average Output Power, Measured

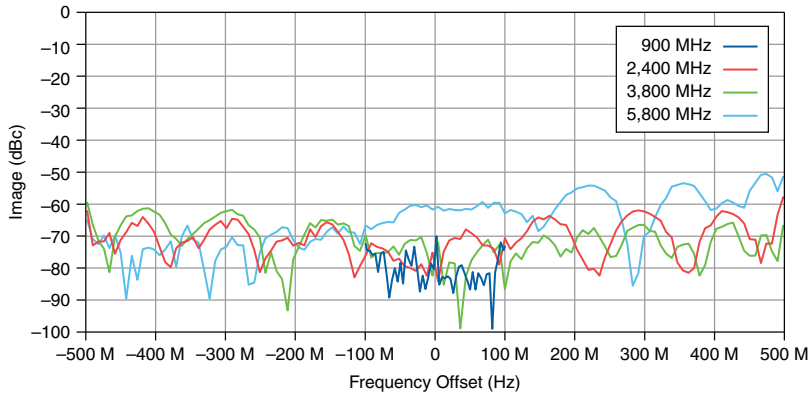


Error Vector Magnitude (EVM)

Table 25. Error Vector Magnitude, RMS (dB), Typical

| Center Frequency | RF Input | RF Output |
|------------------|----------|-----------|
| 350 MHz to 4 GHz | -41 | -41 |
| >4 GHz to 6 GHz | -40 | -40 |

Conditions: 20 MHz bandwidth 64-QAM modulated signal. Pulse-shape filtering: root-raised cosine, alpha=0.25; PXIe-5840 RF Input reference level: 0 dBm, LO Offset: 10 MHz; PXIe-5840 RF Output average power level: -5 dBm; Reference Clock source: Onboard; Acquisition length: 300 μ s.

Figure 15. Measured RMS EVM¹⁴

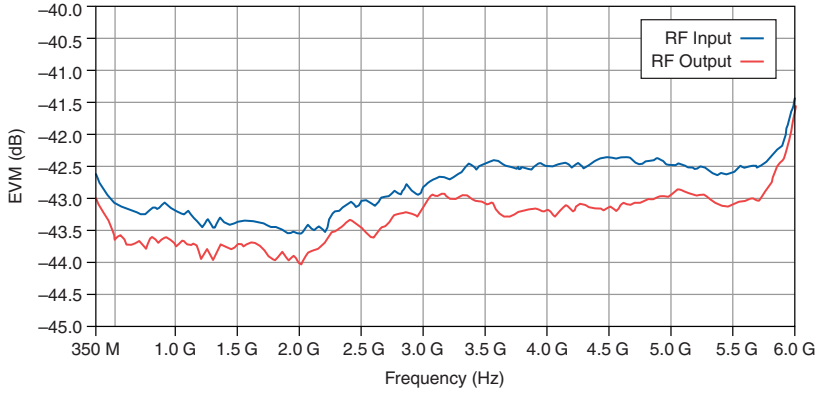


¹⁴ Conditions: 20 MHz bandwidth 64-QAM modulated signal. Pulse-shape filtering: root-raised cosine, alpha=0.25; PXIe-5840 RF Input reference level: 0 dBm, LO Offset: 10 MHz; PXIe-5840 RF Output average power level: -5 dBm; Reference Clock source: Onboard; acquisition length: 300 μ s.

Application-Specific Modulation Quality


WLAN 802.11ax

Figure 16. WLAN 802.11ax Measured RMS EVM (dB) versus Frequency (Hz), External LO¹⁵

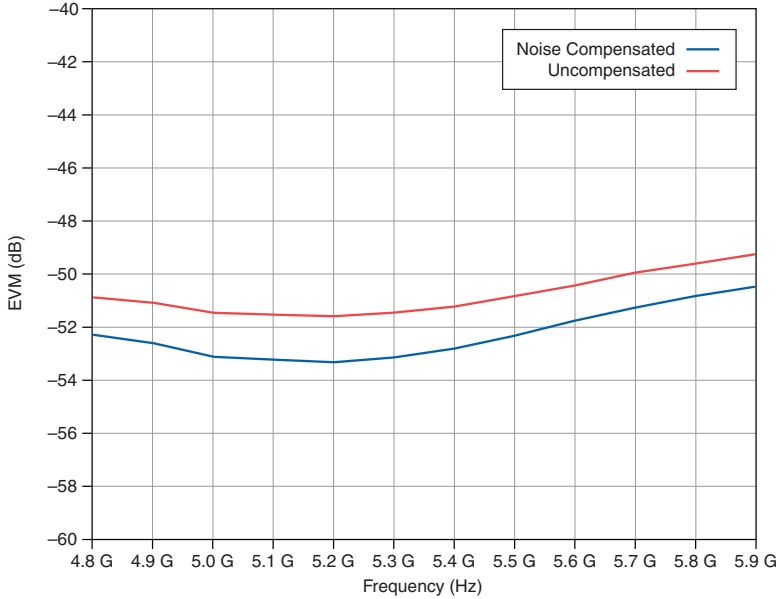


¹⁵ Conditions: RF Output loopback to RF Input; waveform bandwidth: 80 MHz; MCS Index: 11; 16 OFDM Symbols; 10 Packet Averages; LO Offset: -250 MHz; device instantaneous bandwidth: 1 GHz; RF Output power level: -15 dBm; External LO: PXIe-5653. Channel Estimation Method is Preamble.

Figure 17. WLAN 802.11ax Measured RMS EVM (dB) versus Measured Average Power (dBm), External LO¹⁶

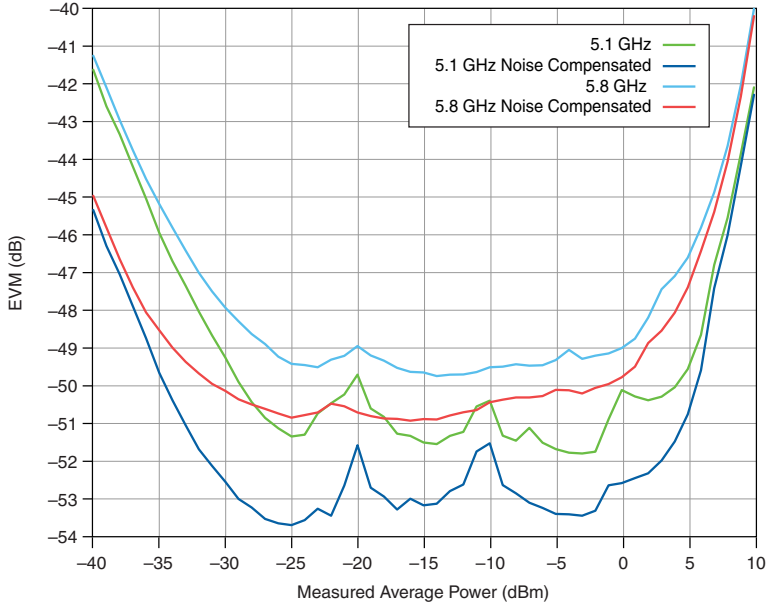


¹⁶ Conditions: RF Output loopback to RF Input; waveform bandwidth: 80 MHz; MCS Index: 11; LO Offset: -250 MHz; device instantaneous bandwidth: 1 GHz; External LO: PXIe-5653. Channel Estimation Method is Preamble.

Figure 18. WLAN 802.11ax Measured RMS EVM (dB) versus Frequency (Hz), Internal LO¹⁷

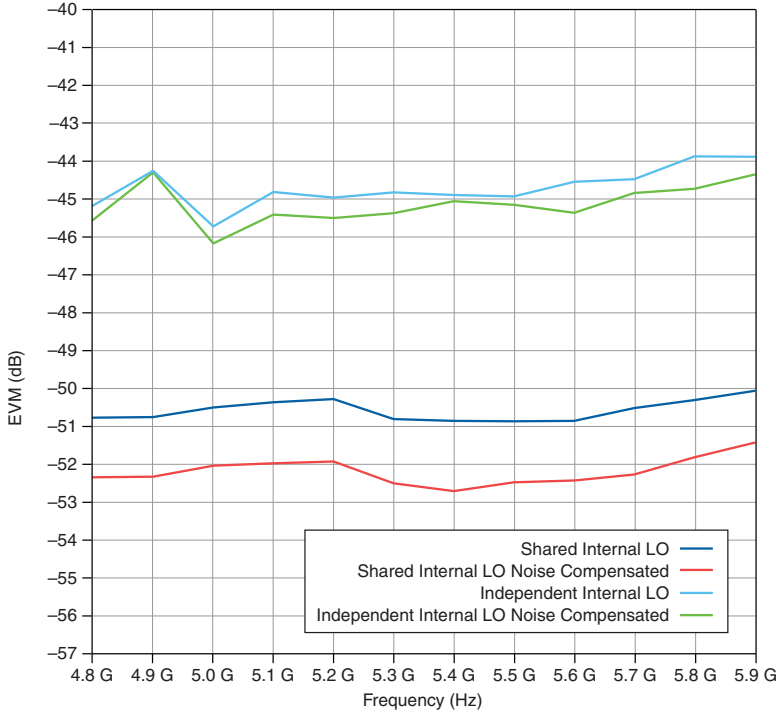

¹⁷ Conditions: RF Output loopback to RF Input; waveform bandwidth: 80 MHz; MCS Index: 11; LO Offset: -250 MHz; device instantaneous bandwidth: 1 GHz; RF Output power level: -15 dBm. Channel Estimation Method is Preamble.


Figure 19. WLAN 802.11ax Measured RMS EVM (dB) versus Measured Average Power (dBm), Internal LO¹⁸

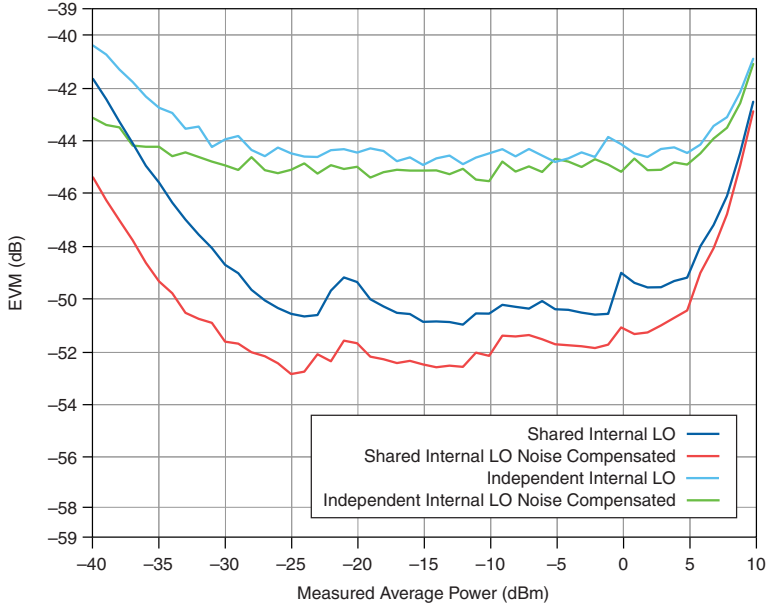

¹⁸ Conditions: RF Output loopback to RF Input; waveform bandwidth: 80 MHz; MCS index: 11; LO Offset: -250 MHz; device instantaneous bandwidth: 1 GHz; carrier frequency: 5.5 GHz.


WLAN 802.11ac

Figure 20. WLAN 802.11ac Measured RMS EVM (dB) versus Frequency (Hz), 80 MHz Bandwidth¹⁹

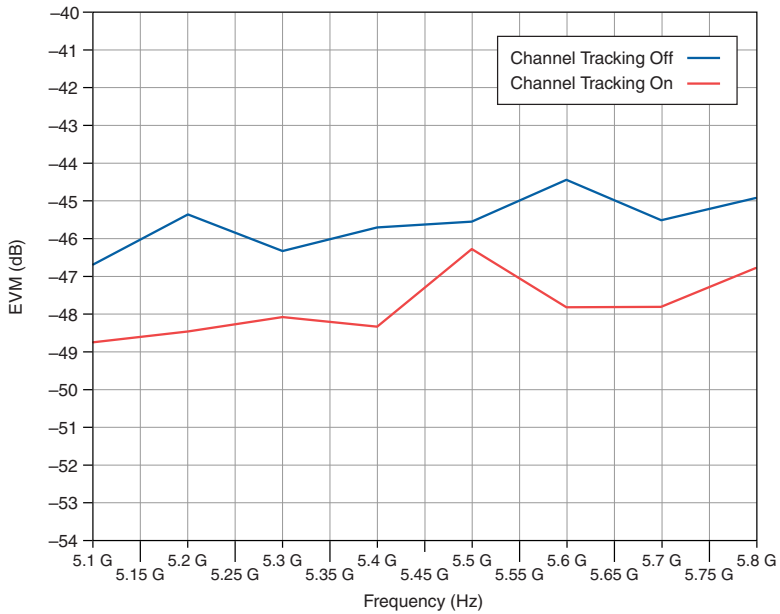

¹⁹ Conditions: RF Output loopback to RF Input; MCS Index: 9; 16 OFDM Symbols; 10 Packet Averages; LO Offset: -250 MHz; device instantaneous bandwidth: 500 MHz; RF Output power level: 0 dBm; Internal LO.


Figure 21. WLAN 802.11ac Measured RMS EVM (dB) versus Frequency (Hz), 160 MHz Bandwidth²⁰

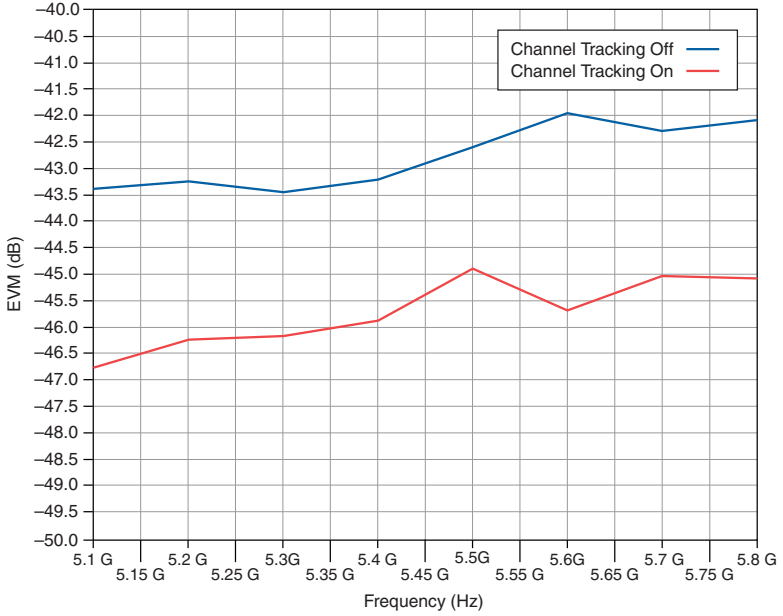

²⁰ Conditions: RF Output loopback to RF Input; MCS Index: 9; LO Offset: -250 MHz; device instantaneous bandwidth: 500 MHz; RF Output power level: 0 dBm; Internal LO.

LTE


Figure 22. LTE Measured RMS EVM (dB) versus Frequency (Hz)²¹

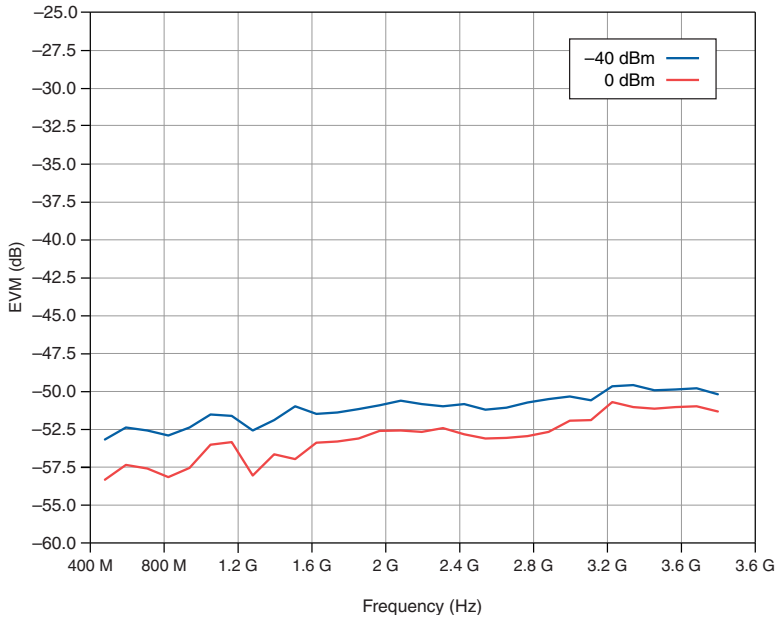

²¹ Conditions: RF Output loopback to RF Input; Single LTE channel; LO Leakage Avoidance disabled.

WCDMA

Figure 23. WCDMA Measured RMS EVM (dB) versus Frequency (Hz)²²

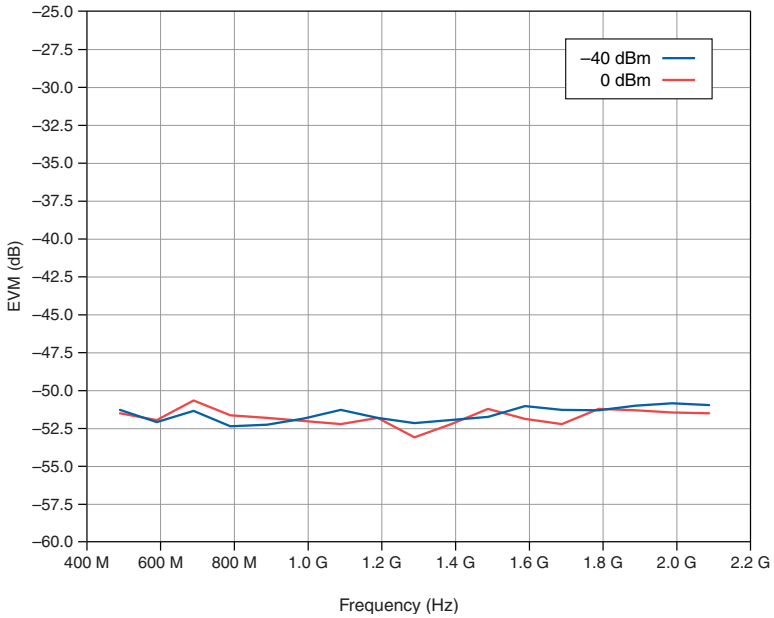

Baseband Characteristics

Analog-to-digital converters (ADCs)

| | |
|-----------------------------|----------------------|
| Resolution | 14 bits |
| Sample rate | 1.25 GS/s |
| I/Q data rate ²³ | 19 kS/s to 1.25 GS/s |

Digital-to-analog converters (DACs)

| | |
|-----------------------------|----------------------|
| Resolution | 16 bits |
| Sample rate ²⁴ | 1.25 GS/s |
| I/Q data rate ²⁵ | 19 kS/s to 1.25 GS/s |

²² Conditions: RF Output loopback to RF Input; Single WCDMA channel; LO Leakage Avoidance enabled

²³ I/Q data rates lower than 1.25 GS/s are achieved using fractional decimation.

²⁴ DAC sample rate is internally interpolated to 2.5 GS/s, automatically configured.

²⁵ I/Q data rates lower than 1.25 GS/s are achieved using fractional interpolation.

Onboard FPGA

| | |
|------------------------|---------------------------------|
| FPGA | Xilinx Virtex-7 X690T |
| LUTs | 433,200 |
| Flip-flops | 866,400 |
| DSP48 slices | 3,600 |
| Embedded block RAM | 52.9 Mbits |
| Data transfers | DMA, interrupts, programmed I/O |
| Number of DMA channels | 56 |

Onboard DRAM

| | |
|-------------------------------|------------------------|
| Memory size | 2 banks, 2 GB per bank |
| Theoretical maximum data rate | 12 GB/s per bank |

Onboard SRAM

| | |
|---------------------------|---------|
| Memory size | 2 MB |
| Maximum data rate (read) | 31 MB/s |
| Maximum data rate (write) | 29 MB/s |

Front Panel I/O



Note Measurement Categories CAT I and CAT O (Other) are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

RF IN

| | |
|---|-----------------------------------|
| Connector | SMA (female) |
| Input impedance | 50 Ω , nominal, AC coupled |
| Maximum DC input voltage without damage | ± 10 VDC |
| Absolute maximum input power | |
| <120 MHz | +24 dBm (CW RMS) |
| ≥ 120 MHz | +33 dBm (CW RMS) |

Input Return Loss (VSWR)

Table 26. Input Return Loss (dB) (Voltage Standing Wave Ratio), Typical

| Frequency | Preamp Disabled | Preamp Enabled, Auto |
|---------------------|-----------------|----------------------|
| 100 kHz to <500 MHz | 13.5 (1.51:1) | 13.5 (1.51:1) |
| 500 MHz to <1.2 GHz | 15.0 (1.43:1) | 13.5 (1.51:1) |
| 1.2 GHz to <3.8 GHz | 15.0 (1.43:1) | 15.0 (1.43:1) |
| 3.8 GHz to <4.2 GHz | 15.0 (1.43:1) | 13.5 (1.51:1) |
| 4.2 GHz to <5.8 GHz | 15.0 (1.43:1) | 15.0 (1.43:1) |
| 5.8 GHz to 6.0 GHz | 13.5 (1.51:1) | 13.5 (1.51:1) |

RF OUT

| | |
|--------------------------------|-----------------------------------|
| Connector | SMA (female) |
| Output impedance | 50 Ω , nominal, AC coupled |
| Absolute maximum reverse power | |
| <120 MHz | +24 dBm (CW RMS) |
| \geq 120 MHz | +33 dBm (CW RMS) |

Output Return Loss (VSWR)

Table 27. Output Return Loss (dB) (Voltage Standing Wave Ratio), Typical

| Frequency | Typical |
|---------------------|---------------|
| 100 kHz to <500 MHz | 12.0 (1.67:1) |
| 500 MHz to <2.8 GHz | 17.0 (1.33:1) |
| 2.8 GHz to <4.5 GHz | 14.5 (1.46:1) |
| 4.5 GHz to <5.8 GHz | 16.0 (1.38:1) |
| 5.8 GHz to 6.0 GHz | 15.0 (1.43:1) |

LO OUT (RF IN and RF OUT)

| | |
|-----------------|---------------------------|
| Connectors | MMPX (female) |
| Frequency range | 120 MHz to 6 GHz |
| Output power | 0 dBm \pm 2 dB, typical |

| | |
|---------------------------------------|-----------------------------------|
| Output power resolution ²⁶ | 0.25 dB, nominal |
| Output impedance | 50 Ω , nominal, AC coupled |
| Output return loss | |
| 120 MHz to 2 GHz | >15 dB (VSWR < 1.43:1), nominal |
| >2 GHz to 6 GHz | >12 dB (VSWR < 1.67:1), nominal |

LO IN (RF IN and RF OUT)

| | |
|--|-----------------------------------|
| Connectors | MMPX (female) |
| Frequency range | 120 MHz to 6 GHz |
| Input power range ²⁷ | -4 dBm to 0 dBm, nominal |
| Input impedance | 50 Ω , nominal, AC coupled |
| Input return loss (LO IN Enabled) | |
| 120 MHz to 2 GHz | >20 dB (VSWR <1.22:1), nominal |
| >2 GHz to 6 GHz | >15 dB (VSWR <1.43:1), nominal |
| Input return loss (LO IN Disabled) 120 MHz to 6 GHz | >18 dB (VSWR <1.22:1), nominal |
| Absolute maximum input power | +15 dBm |
| Maximum DC voltage | ± 5 VDC |

REF IN

| | |
|-------------------------|---|
| Connector | MMPX (female) |
| Frequency | 10 MHz |
| Tolerance ²⁸ | $\pm 10 \times 10^{-6}$ |
| Amplitude ²⁹ | 0.7 V _{pk-pk} to 3.3 V _{pk-pk} into 50 Ω , typical |
| Input impedance | 50 Ω , nominal |
| Coupling | AC |

²⁶ Output power resolution refers to the RF attenuator step size used to compensate for the LO output frequency response.

²⁷ The PXIe-5840 supports receiving an external LO with a range of signal power levels. To properly configure the PXIe-5840 LO signal path for the provided level, set `NIRFSA_ATTR_LO_IN_POWER` or `NIRFSG_ATTR_LO_IN_POWER`.

²⁸ *Frequency Accuracy = Tolerance \times Reference Frequency*

²⁹ Jitter performance improves with increased slew rate of input signal.

REF OUT

| | |
|-------------------------|--|
| Connector | MMPX (female) |
| Frequency ³⁰ | 10 MHz, nominal |
| Amplitude | 1.65 V _{pk-pk} into 50 Ω, nominal |
| Output impedance | 50 Ω, nominal |
| Coupling | AC |

PFI 0

| | |
|------------------------------|------------------------|
| Connector | MMPX (female) |
| Voltage levels ³¹ | |
| Absolute maximum input range | -0.5 V to 5.5 V |
| V _{IL} , maximum | 0.8 V |
| V _{IH} , minimum | 2.0 V |
| V _{OL} , maximum | 0.2 V with 100 μA load |
| V _{OH} , minimum | 2.9 V with 100 μA load |
| Input impedance | 10 kΩ, nominal |
| Output impedance | 50 Ω, nominal |
| Maximum DC drive strength | 24 mA |

DIGITAL I/O

| | |
|-------------|----------------------------|
| Connector | Molex Nano-Pitch I/O |
| 5.0 V Power | ±5%, 50mA maximum, nominal |

Table 28. DIGITAL I/O Signal Characteristics

| Signal | Type | Direction |
|--------------------------|---------------------|---------------|
| MGT Tx± <3..0> | Xilinx Virtex-7 GTH | Output |
| MGT Rx± <3..0> | Xilinx Virtex-7 GTH | Input |
| MGT REF± | Differential | Input |
| DIO <1..0> ³² | Single-ended | Bidirectional |

³⁰ Refer to the *Internal Frequency Reference* section for accuracy.

³¹ Voltage levels are guaranteed by design through the digital buffer specifications.

³² Pins are multiplexed with MGT REF±.

Table 28. DIGITAL I/O Signal Characteristics (Continued)

| Signal | Type | Direction |
|------------|--------------|---------------|
| DIO <7..2> | Single-ended | Bidirectional |
| 5.0 V | DC | Output |
| GND | Ground | — |

Digital I/O Single-Ended Channels

| | |
|---|---------------------------------------|
| Number of channels | 8 |
| Signal type | Single-ended |
| Voltage families | 3.3 V, 2.5 V, 1.8 V, 1.5 V, 1.2 V |
| Input impedance | |
| DIO <1..0> | 10 k Ω , nominal |
| DIO <7..2> | 100 k Ω , nominal |
| Output impedance | 50 Ω , nominal |
| Direction control | Per channel |
| Minimum required direction change latency | 200 ns |
| Maximum output toggle rate | 60 MHz with 100 μ A load, nominal |

Table 29. DIGITAL I/O Single-Ended DC Signal Characteristics³³

| Voltage Family | V _{IL} Max | V _{IH} Min | V _{OL} Max (100 μ A load) | V _{OH} Min (100 μ A load) | Maximum DC Drive Strength |
|----------------|---------------------|---------------------|---|---|---------------------------|
| 3.3 V | 0.8 V | 2.0 V | 0.2 V | 3.0 V | 24 mA |
| 2.5 V | 0.7 V | 1.6 V | 0.2 V | 2.2 V | 18 mA |
| 1.8 V | 0.62 V | 1.29 V | 0.2 V | 1.5 V | 16 mA |
| 1.5 V | 0.51 V | 1.07 V | 0.2 V | 1.2 V | 12 mA |
| 1.2 V | 0.42 V | 0.87 V | 0.2 V | 0.9 V | 6 mA |

³³ Voltage levels are guaranteed by design through the digital buffer specifications.

Digital I/O High Speed Serial MGT³⁴

| | |
|---------------------------|------------------------------|
| Data rate | 500 Mbps to 12 Gbps, nominal |
| Number of Tx channels | 4 |
| Number of Rx channels | 4 |
| I/O AC coupling capacitor | 100 nF |

MGT Tx± <3..0> Channels

| | |
|---|---|
| Minimum differential output voltage ³⁵ | 800 mV _{pk-pk} into 100 Ω, nominal |
|---|---|

MGT Rx± <3..0> Channels

| | |
|----------------------------------|---|
| Differential input voltage range | |
| ≤ 6.6 GB/s | 150 mV _{pk-pk} to 2000 mV _{pk-pk} , nominal |
| > 6.6 GB/s | 150 mV _{pk-pk} to 1250 mV _{pk-pk} , nominal |
| Differential input resistance | 100 Ω, nominal |

MGT Reference Clock

| | |
|--------------------------------------|----------------------------|
| Clocking Resources | |
| Internal MGT reference ³⁶ | 78.125 MHz to 625 MHz |
| Data Clock | 156.25 MHz |
| MGT REF± Input | 60 MHz to 820 MHz, nominal |

MGT REF± Input

| | |
|---|--------------------------------|
| AC coupling capacitors | 100 nF |
| Differential input resistance | 100 Ω, nominal |
| Differential input V _{pk-pk} range | 350 mV to 2000 mV, nominal |
| Absolute maximum input range | -1.25 V to 4.5 V ³⁷ |

³⁴ For detailed FPGA and High Speed Serial Link specifications, refer to Xilinx documentation.

³⁵ When transmitter output swing is set to the maximum setting.

³⁶ Internal MGT Reference is derived from the Sample Clock PLL. Available frequencies are 2.5 GHz / N, where 4 ≤ N ≤ 32. Set via MGT component level IP (CLIP).

³⁷ Absolute maximum levels at input, prior to AC coupling capacitors.

Figure 24. DIGITAL I/O Nano-Pitch Connector

| | | | |
|------------------|-----|-----|-----------|
| Reserved | A1 | B1 | 5.0 V |
| GND | A2 | B2 | GND |
| MGT Rx+ 0 | A3 | B3 | MGT Tx+ 0 |
| MGT Rx- 0 | A4 | B4 | MGT Tx- 0 |
| GND | A5 | B5 | GND |
| MGT Rx+ 1 | A6 | B6 | MGT Tx+ 1 |
| MGT Rx- 1 | A7 | B7 | MGT Tx- 1 |
| GND | A8 | B8 | GND |
| DIO 4 | A9 | B9 | DIO 6 |
| DIO 5 | A10 | B10 | DIO 7 |
| GND | A11 | B11 | GND |
| MGT REF+ / DIO 0 | A12 | B12 | DIO 2 |
| MGT REF- / DIO 1 | A13 | B13 | DIO 3 |
| GND | A14 | B14 | GND |
| MGT Rx+ 2 | A15 | B15 | MGT Tx+ 2 |
| MGT Rx- 2 | A16 | B16 | MGT Tx- 2 |
| GND | A17 | B17 | GND |
| MGT Rx+ 3 | A18 | B18 | MGT Tx+ 3 |
| MGT Rx- 3 | A19 | B19 | MGT Tx- 3 |
| GND | A20 | B20 | GND |
| 5.0 V | A21 | B21 | Reserved |

Power Requirements

Table 30. Power Requirements

| Voltage (V _{DC}) | Typical Current (A) |
|----------------------------|---------------------|
| +3.3 | 3.3 |
| +12 | 5.8 |

Power is 80 W, typical. Consumption is from both NI PXI Express backplane power connectors.

Conditions: Simultaneous generation and acquisition using NI-RFSG and NI-RFSA at 1.25 GS/s IQ rate, 45 °C ambient temperature. Power consumption depends on FPGA image being used.

Calibration

Interval 1 year



Note For the two-year calibration interval, add 0.2 dB to one year specifications for *RF Input Absolute Amplitude Accuracy*, *RF Input Frequency Response*, *RF Output Power Level Accuracy*, and *RF Output Frequency Response*.

Physical Characteristics

| | |
|------------------|---|
| PXIe-5840 module | 2U, two slot, PXI Express module 4.1 cm × 12.9 cm × 21.1 cm (1.6 in. × 5.6 in. × 8.3 in.) |
| Weight | 794 g (28.0 oz) |

Environment

| | |
|------------------|---|
| Maximum altitude | 2,000 m (800 mbar) (at 25 °C ambient temperature) |
|------------------|---|

| | |
|------------------|---|
| Pollution Degree | 2 |
|------------------|---|

Indoor use only.

Operating Environment

| | |
|---------------------------|--|
| Ambient temperature range | 0 °C to 45 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 low temperature limit and MIL-PRF-28800F Class 4 high temperature limit.) |
|---------------------------|--|

| | |
|-------------------------|---|
| Relative humidity range | 10% to 90%, noncondensing (Tested in accordance with IEC 60068-2-56.) |
|-------------------------|---|

Storage Environment

| | |
|---------------------------|---|
| Ambient temperature range | -40 °C to 71 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 limits.) |
|---------------------------|---|

| | |
|-------------------------|--|
| Relative humidity range | 5% to 95%, noncondensing (Tested in accordance with IEC 60068-2-56.) |
|-------------------------|--|

Shock and Vibration

| | |
|------------------|--|
| Operating shock | 30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Meets MIL-PRF-28800F Class 2 limits.) |
| Random vibration | |
| Operating | 5 Hz to 500 Hz, 0.3 g _{rms} (Tested in accordance with IEC 60068-2-64.) |
| Nonoperating | 5 Hz to 500 Hz, 2.4 g _{rms} (Tested in accordance with IEC 60068-2-64. Test profile exceeds the requirements of MIL-PRF-28800F, Class 3.) |

Compliance and Certifications

Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- CAN/CSA-C22.2 No. 61010-1



Note For UL and other safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations, certifications, and additional information, refer to the [Product Certifications and Declarations](#) section.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

2014/30/EU; Electromagnetic Compatibility Directive (EMC)

Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help>Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2017—2018 National Instruments. All rights reserved.

376626C-01 December 17, 2018