

COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash  Get Credit  Receive a Trade-In Deal

OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



Bridging the gap between the manufacturer and your legacy test system.

 1-800-915-6216

 www.apexwaves.com

 sales@apexwaves.com

All trademarks, brands, and brand names are the property of their respective owners.

Request a Quote

 **CLICK HERE**

PXIe-6570

SPECIFICATIONS

PXIe-6570

100 MVector/s PXI Digital Pattern Instrument

These specifications apply to the PXIe-6570. When using the PXIe-6570 in the Semiconductor Test System, refer to the *Semiconductor Test System Specifications*.

Contents

Definitions.....	2
Conditions.....	2
General.....	2
Timing.....	3
Vector Timing.....	3
Clocking.....	3
Drive and Compare Formats.....	4
Pin Data States.....	5
Edge Timing.....	6
Driver, Comparator, Load	7
Driver	7
Comparator.....	8
Active Load.....	8
PPMU	8
PPMU Force Voltage.....	8
PPMU Measure Voltage	9
PPMU Force Current.....	9
PPMU Measure Current	11
PPMU Programmable Aperture Time.....	12
Pattern Control.....	13
Opcodes.....	13
Pipeline Latencies.....	14
Source and Capture.....	14
Independent Clock Generators.....	15
Frequency Measurements.....	15
Calculating Frequency Counter Error.....	15
Calibration Interval.....	16
Physical Characteristics.....	16
Power Requirements.....	17

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty. Warranted specifications account for measurement uncertainties, temperature drift, and aging. Warranted specifications are ensured by design or verified during production and calibration.

The following characteristic specifications describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the performance met by a majority of models.
- *Nominal* specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are *Nominal* unless otherwise noted.

Conditions

Specifications are valid under the following conditions unless otherwise noted.

- Operating temperature of 0 °C to 45 °C
- Operating temperature within ± 5 °C of the last self-calibration temperature
- Recommended calibration interval of 1 year. The PXIe-6570 will not meet specifications unless operated within the recommended calibration interval.
- DUT Ground Sense (DGS) same potential as the Ground (GND) pins



Note The DGS feature is only available on PXIe-6570 module revisions 158234C-xxL or later.

- Chassis fans set to the highest setting if the PXI Express chassis has multiple fan speed settings
- 30-minute warmup time before operation



Note When the pin electronics on the PXIe-6570 are in the disconnect state, some I/O protection and sensing circuitry remain connected. Do not subject the PXIe-6570 to voltages beyond the supported measurement range.

General

Channel count	32
---------------	----

Multi-site resources per instrument	
-------------------------------------	--

NI-Digital 16.0	4
-----------------	---

NI-Digital 17.0 and later	8
---------------------------	---

System channel count ¹	256
Large Vector Memory (LVM)	128M vectors
History RAM (HRAM)	
NI-Digital 17.5 and earlier	1,023 cycles
NI-Digital 18.0 and later	(8,192/N sites)-1 cycles
Maximum allowable offset (DGS minus GND)	±300 mV
Supported measurement range ²	-2 V to 7 V ³

Timing

Vector Timing

Maximum vector rate	100 MHz
Vector period range	10 ns to 40 μ s (100 MHz to 25 kHz)
Vector period resolution	38 fs
Timing control	
Vector period	Vector-by-vector on the fly
Edge timing	Per channel, vector-by-vector on the fly
Drive formats	Per channel, vector-by-vector on the fly

Clocking

Master clock source	PXIe_CLK100 ⁴
Sequencer clock domains	One (independent sequencer clock domains on a single instrument not supported)

¹ The system channel count is the maximum number of channels available when using multiple PXIe-6570 instruments in a single chassis as a digital subsystem. Some functionality described in this document requires that a PXIe-6674T synchronization module be used in conjunction with each digital subsystem.

² If the total voltage sourced or driven on any pin relative to GND exceeds the supported measurement range, instrument performance may be degraded.

³ Voltages > 6 V require the Extended Voltage Range mode of operation.

⁴ Sourced from chassis 100 MHz backplane reference clock, external 10 MHz reference, or PXIe-6674T.

Drive and Compare Formats

Drive formats⁵

100 MHz maximum vector rate	Non-Return (NR), Return to Low (RL), Return to High (RH)
-----------------------------	--

50 MHz maximum vector rate	Surround by Complement (SBC) ⁶
----------------------------	---


Compare formats	Edge strobe
-----------------	-------------

Edge Multipliers⁵

NI-Digital 17.5 and earlier	1x
-----------------------------	----

NI-Digital 18.0 and later	1x, 2x
---------------------------	--------


Figure 1. Drive Formats

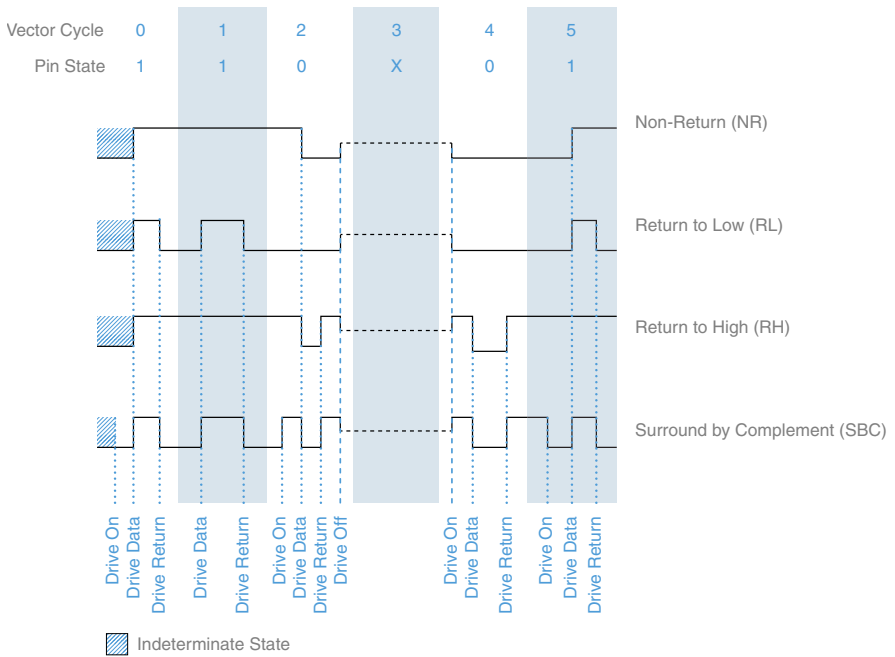

⁵ When using NI-Digital 18.0 and later, the maximum vector rate for patterns may be limited by the pulse width requirements, which may not allow all formats and edge multipliers to be used up to the fastest vector rate.

⁶ The SBC format is not supported within the 2x edge multiplier mode.

Figure 2. 2x Mode Drive Formats

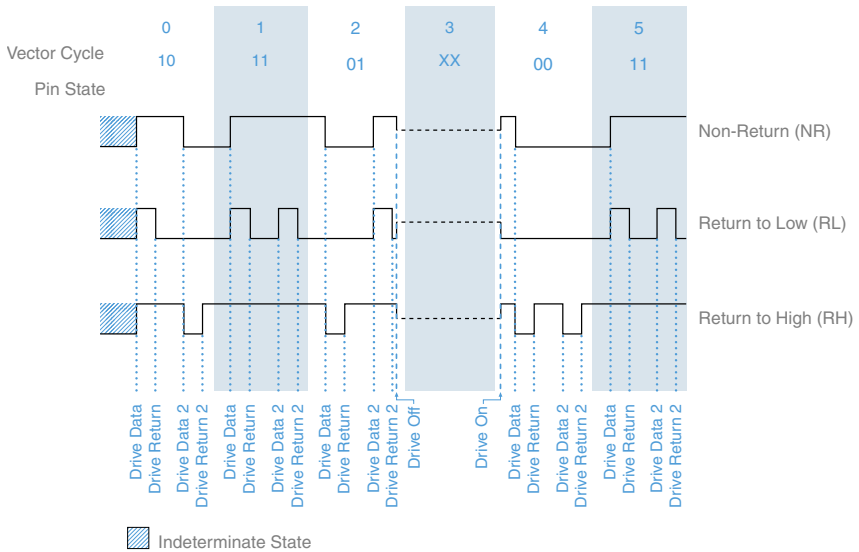

Pin Data States

Pin States

- 0 — Drive zero.
- 1 — Drive one.
- L — Compare low.
- H — Compare high.
- X — Do not drive; mask compare.
- M — Compare midband, not high or low.
- V — Compare high or low, not midband; store results from capture functionality if configured.
- D — Drive data from source functionality if configured.
- E — Expect data from source functionality if configured.⁷
- - — Repeat previous cycle. Do not use a dash (-) for the pin state on the first vector of a pattern file unless the file is used only as a target of a jump or call operation.



Note Termination mode settings affect the termination applied to all non-driving pin states. Non-drive states include L, H, M, V, X, E, and potentially -. Refer to the [Programmable input termination mode](#) specification for more information.

⁷ This functionality requires NI-Digital 18.0 or later.

Edge Timing

Edge Types

Drive edges	
NI-Digital 17.5 and earlier	4; drive on, drive data, drive return
NI-Digital 18.0 and later	6; drive on, drive data, drive return, drive data 2, drive return 2, drive off
Compare edges	
NI-Digital 17.5 and earlier	1; strobe
NI-Digital 18.0 and later	2; strobe, strobe 2
Number of time sets ⁸	31

Edge Generation Timing

Edge placement range	
Minimum	Start of vector period (0 ns)
Maximum	5 vector periods or 40 μ s, whichever is smaller
Minimum required edge separation	
Between any driven data change	
NI-Digital 17.5 and earlier	5 ns
NI-Digital 18.0 and later	3.75 ns
Between any Drive On and Drive Off edges	
	5 ns
Between Compare Strokes	
	5 ns
Edge placement resolution	39.0625 ps
Edge placement accuracy: Drive ⁹	
NI-Digital 17.5 and earlier	
Edge Multiplier = 1x	\pm 500 ps, warranted
NI-Digital 18.0 and later	
Edge Multiplier = 1x	\pm 500 ps, warranted
Edge Multiplier = 2x	Bit rate \leq 200 Mbps: \pm 500 ps, typical
Edge Multiplier = 2x	Bit rate \leq 266 Mbps: \pm 600 ps, typical

⁸ 31 time sets can be configured. One additional time set, represented by a -, repeats the previous time set.

⁹ For specifications in a Semiconductor Test System, refer to the *Semiconductor Test System Specifications*.

Edge placement accuracy: Compare⁹

NI-Digital 17.5 and earlier	
Edge Multiplier = 1x	±500 ps, warranted
NI-Digital 18.0 and later	
Edge Multiplier = 1x	±500 ps, warranted
Edge Multiplier = 2x	Bit rate ≤ 100 Mbps: ±500 ps, typical
Edge Multiplier = 2x	Bit rate ≤ 133 Mbps: ±700 ps, typical
Overall timing accuracy ⁹	
NI-Digital 17.5 and earlier	
Edge Multiplier = 1x	±1.5 ns, warranted
NI-Digital 18.0 and later	
Edge Multiplier = 1x	±1.5 ns, warranted
Edge Multiplier = 2x	Bit rate ≤ 200 Mbps: ±1.5 ns, typical
Edge Multiplier = 2x	Bit rate ≤ 266 Mbps: ±1.8 ns, typical
TDR deskew adjustment resolution	39.0625 ps

Driver, Comparator, Load

Driver

Signal type	Single-ended, referenced to the DGS pin when connected. Otherwise referenced to GND.
Programmable levels	V_{IH} , V_{IL} , V_{TERM}
Voltage levels	
Range (V_{IH} , V_{IL} , V_{TERM})	-2 V to 6 V
Minimum swing (V_{IH} minus V_{IL})	400 mV, into a 1 M Ω load
Resolution (V_{IH} , V_{IL} , V_{TERM})	122 μ V
Accuracy (V_{IH} , V_{IL} , V_{TERM})	±15 mV, 1 M Ω load, warranted
Maximum DC drive current	±32 mA
Output impedance	50 Ω
Rise/fall time, 20% to 80%	1.2 ns, up to 5 V

Comparator

Signal type	Single-ended, referenced to the DGS pin when connected. Otherwise referenced to GND.
Programmable levels	V_{OH} , V_{OL}
Voltage levels	
Range (V_{OH} , V_{OL})	-2 V to 6 V
Resolution (V_{OH} , V_{OL})	122 μ V
Accuracy (V_{OH} , V_{OL})	\pm 25 mV, from -1.5 V to 5.8 V, warranted
Programmable input termination modes	High Z, 50 Ω to V_{TERM} , Active Load
Leakage current	<15 nA, in the High Z termination mode

Active Load

Programmable levels	I_{OH} , I_{OL}
Commutating voltage (V_{COM})	
Range	-2 V to 6 V
Resolution	122 μ V
Current levels	
Range	1.5 mA to 24 mA
Resolution	488 nA
Accuracy	1 mA, 3 V over/under drive, typical

PPMU

PPMU Force Voltage

Signal type	Single-ended, referenced to the DGS pin when connected. Otherwise referenced to GND.
-------------	--

Voltage levels

Range	
NI-Digital 17.5 and earlier	-2 V to 6 V
NI-Digital 18.0 and later	-2 V to 6 V 6 V to 7 V in Extended Voltage Range ¹⁰
Resolution	
122 μ V	
Accuracy	
NI-Digital 17.5 and earlier	± 15 mV, 1 M Ω load, from -2 V to 6 V, warranted
NI-Digital 18.0 and later	± 15 mV, 1 M Ω load, from -2 V to 6 V, warranted ± 50 mV, 1 M Ω load, from 6 V to 7 V, typical ¹⁰

PPMU Measure Voltage

Signal type Single-ended, referenced to the DGS pin when connected. Otherwise referenced to GND.

Voltage levels

Range	
-2 V to 6 V	
Resolution	
228 μ V	
Accuracy	
± 5 mV, warranted	


PPMU Force Current

Table 1. PPMU Force Current Accuracy

Range	Resolution	Accuracy
± 2 μ A	60 pA	$\pm 1\%$ of range for Zone 1 of Figure 3 . on page 10, warranted
± 32 μ A	980 pA	
± 128 μ A	3.9 nA	
± 2 mA	60 nA	
± 32 mA	980 nA	

¹⁰ The Extended Voltage Range is an unwarranted mode of operation that allows the PMU to force voltages between 6 V and 7 V for applications that can tolerate more error than the normal force voltage accuracy.

Figure 3. Warranted Current Accuracy Zone for PPMU Force Current

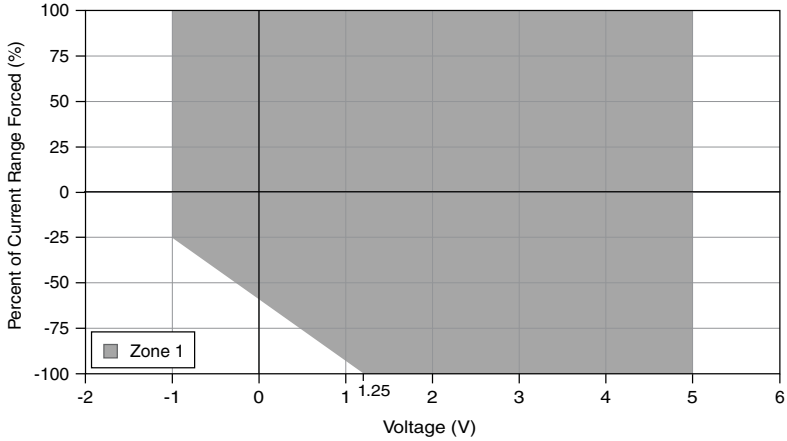

Note The boundaries of Zone 1 are inclusive of that zone. The area outside of Zone 1 does not have a warranted spec for PPMU force current accuracy.

How to Calculate PPMU Force Current Accuracy

1. Specify the desired forced current.
2. Based on the desired forced current, select an appropriate current range from Table 1.
3. Divide the desired forced current from step 1 by the current range from step 2 and multiply by 100 to calculate the Percent of Current Range Forced.
4. Based on the impedance of the load, calculate the voltage required to force the desired current from step 1. Use the following equation: $\text{Voltage Required} = \text{Desired Current} * \text{Load Impedance}$.
5. Using Figure 2, locate the zone in which the Percent of Current Range Forced calculated in step 3 intersects with the Voltage calculated in step 4. If the intersection is outside of Zone 1, then there are no warranted specs. To get warranted specs, the current range and/or forced current must be adjusted until the intersection is in Zone 1.
6. Based on the zone found in step 5, use Table 1 to calculate the accuracy of the forced current.

PPMU voltage clamps


Range	-2 V to 6 V
Resolution	122 μV
Accuracy	± 100 mV, typical

PPMU Measure Current

Table 2. PPMU Measure Current Accuracy

Range	Resolution	Accuracy
±2 µA	460 pA	±1% of range for Zone 1 of <i>Figure 4.</i> on page 11, warranted ±1.5% of range for Zone 2 of <i>Figure 4.</i> on page 11, warranted
±32 µA	7.3 nA	
±128 µA	30 nA	
±2 mA	460 nA	
±32 mA	7.3 µA	

Figure 4. Warranted Current Accuracy Zones for PPMU Measure Current

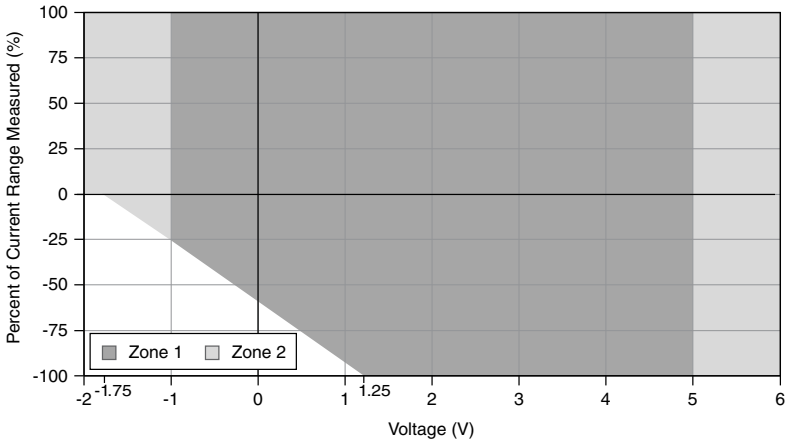

Note The boundaries of Zone 1 are inclusive of that zone. All other boundaries are inclusive of Zone 2. The area outside of Zone 1 and Zone 2 does not have a warranted spec for PPMU measure current accuracy.

How to Calculate PPMU Measure Current Accuracy

1. Specify the desired measured current.
2. Based on the desired measured current, select an appropriate current range from Table 2.
3. Divide the desired measured current from step 1 by the current range from step 2 and multiply by 100 to calculate the Percent of Current Range Measured.
4. If forcing voltage and then measuring current, Voltage in Figure 3 is equal to the forced voltage. If forcing current and then measuring current, Voltage in Figure 3 is equal to the

voltage required to force the desired current based on the impedance of the load. Use the following equation: Voltage Required = Desired Current * Load Impedance.


5. Using Figure 3, locate the zone in which the Percent of Current Range Measured calculated in step 3 intersects with the Voltage calculated in step 4. If the intersection is outside of Zone 1 or Zone 2, then there are no warranted specs. To get warranted specs, the current range and forced current or forced voltage must be adjusted until the intersection is in Zone 1 or Zone 2.
6. Based on the zone found in step 5, use Table 2 to calculate the accuracy of the measured current.

PPMU Programmable Aperture Time

Aperture time

Minimum	4 μ s
Maximum	65 ms
Resolution	4 μ s

Figure 5. Voltage Measurement Noise for Given Aperture Times, Typical

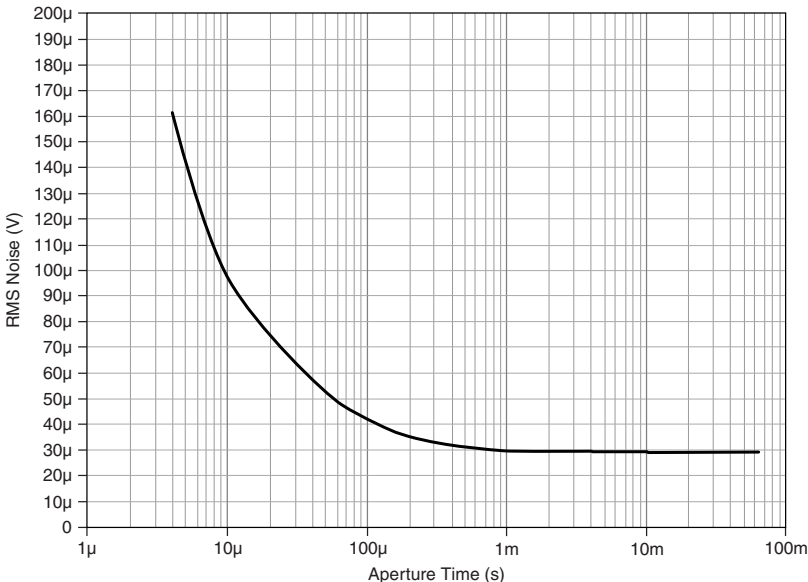

Pattern Control

Opcodes

Refer to the following table for supported opcodes. Using matched and failed opcode parameters with multiple PXIe-6570 instruments requires the PXIe-6674T synchronization module. Other uses of flow-control opcodes with multiple PXIe-6570 instruments only require NI-TCLK synchronization.

Category	Supported Opcodes
Flow Control	<ul style="list-style-type: none">• repeat• jump• jump_if• set_loop• end_loop• exit_loop• exit_loop_if• call• return• keep_alive• match• halt
Sequencer Flags and Registers	<ul style="list-style-type: none">• set_seqflag• clear_seqflag• write_reg

Category	Supported Opcodes
Signal	<ul style="list-style-type: none"> • set_signal • pulse_signal • clear_signal
Digital Source and Capture	<ul style="list-style-type: none"> • capture_start • capture • capture_stop • source_start • source • source_d_replace



Note The `source_d_replace` opcode is only available with NI-Digital 18.0 or later.

Pipeline Latencies

Minimum delay between `source_start` opcode and the first `source` opcode or subsequent `source_start` opcode 3 μ s

Matched and failed condition pipeline latency 80 cycles

Source and Capture

Digital Source¹¹

Operation modes	Serial and parallel; broadcast and site-unique
Source memory size	32 MB (256 Mbit) total
Maximum waveforms	512

Digital Capture¹¹

Operation modes	Serial and parallel; site-unique
Capture memory size	1 million samples
Maximum waveforms	512

¹¹ To learn how to calculate achievable data rates for Digital Source or Digital Capture, visit ni.com/info and enter the info code `DigitalSourceCapture` to access the Calculating Digital Source Rate tutorial or the Calculating Digital Capture Rate tutorial.

Independent Clock Generators



Note This functionality requires NI-Digital 18.0 or later.

Number of Clock Generators	32 (one per pin)
Clock Period Range	6.25 ns to 40 us (160 MHz to 25 kHz) ¹²
Clock Period Resolution	38 fs

Frequency Measurements



Note This functionality requires NI-Digital 17.0 or later.

Frequency counter measure frequency	
Range	5 kHz to 200 MHz, 2.5 ns minimum pulse width
Accuracy	See Calculating Frequency Counter Error

Calculating Frequency Counter Error

Use the following equation to calculate the frequency counter error (ppm).

$$\left(\frac{TB_{err}}{(1 - TB_{err})} + \frac{20ns}{(MeasurementTime - UnknownClockPeriod)} \right) * 1,000,000$$

where

MeasurementTime is the time, in seconds, over which the frequency counter measurement is configured to run

UnknownClockPeriod is the time, in seconds, of the period of the signal being measured

TB_{err} is the error of the Clk100 timebase

Refer to the following table for a few examples of common Clk100 timebase accuracies.

Table 3. TB_{err}

PXI Express Hardware Specification Revision 1.0	PXIe-1085 Chassis	PXIe-6674T Override
100 μ (100 ppm)	25 μ (25 ppm)	80 n (80 ppb)

¹² Clocks with a period < 7.5 ns will have a non-50% duty cycle.

Example 1: Calculating Error with a PXIe-1085 Chassis

Calculate the error of performing a frequency measurement of a 10 MHz clock (100 ns period) with a 1 ms measurement time using the PXIe-Clk100 provided by the PXIe-1085 chassis as the timebase.

Solution

$$\left(\frac{25\mu}{(1 - 25\mu)} + \frac{20ns}{(1ms - 100ns)} \right) * 1,000,000$$
$$= 45ppm$$

Example 2: Calculating Error when Overriding with the PXIe-6674T

Calculate the error if you override the PXIe-Clk100 timebase with the PXIe-6674T and increase the measurement time to 10 ms.

Solution

$$\left(\frac{80n}{(1 - 80n)} + \frac{20ns}{(10ms - 100ns)} \right) * 1,000,000$$
$$= 2ppm$$

Calibration Interval

Recommended calibration interval	1 year
----------------------------------	--------

Physical Characteristics

PXIe slots	2
Dimensions	131 mm × 42 mm × 214 mm (5.16 in. × 1.65 in. × 8.43 in.)
Weight	920 g (32.45 oz.)

Power Requirements

The PXIe-6570 draws current from a combination of the 3.3 V and 12 V power rails. The maximum current drawn from each of these rails can vary depending on the PXIe-6570 mode of operation. The total power consumption will not exceed the input power specification.

Input power	68 W
<hr/>	
Current Draw	
3.3 V	4.4 A
12 V	4.7 A

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2015—2018 National Instruments. All rights reserved.

375726E-01 June 25, 2018