

COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash  Get Credit  Receive a Trade-In Deal

OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



Bridging the gap between the manufacturer and your legacy test system.

 1-800-915-6216

 www.apexwaves.com

 sales@apexwaves.com

All trademarks, brands, and brand names are the property of their respective owners.

Request a Quote

 **CLICK HERE**

PCI-6520

NI 6520 Specifications

This document lists specifications for the NI PCI-6520 device. All specifications are subject to change without notice. These specifications are typical at 25 °C unless otherwise noted.

Digital I/O

Number of channels 16 (eight optically isolated digital input channels and eight non-latching relay output channels)

Data transfers Interrupts, programmed I/O

I/O connector 37-pin male D-SUB

Relay types 3 non-latching SPDT (Form C),
5 non-latching SPST (Form A)

Power-on state De-energized, default; user-programmable to de-energized or energized



Note The response time of programmable power-up states is 400 ms.

Isolated Inputs

Number of input channels 8 (each bipolar and isolated from other channels)

Input voltage range -30 VDC to 30 VDC, P0.X+ to P0.X-

Isolation
Channel-to-channel 60 VDC continuous¹

Default power-off state Relays de-energized



Caution The maximum switching current is limited by the maximum switching power, the maximum voltage, and must not exceed 60 W/60 VA.

Digital logic levels

Level	Min	Max
Input low voltage	0 VDC	±4 VDC
Input high voltage	±11 VDC	±30 VDC

Contact rating

Maximum switching power 60 W/60 VA

Maximum voltage (AC) 42.4 V_{pk}/30 V_{rms}

Maximum voltage (DC) 60 VDC

Maximum current 2 A²

DC path resistance

Initial 0.2 Ω

End of life ≥1.0 Ω

Input current

11 V inputs 4.5 mA/channel max

30 V inputs 12.5 mA/channel max

Relay operate time 2 ms typ,
4 ms max

Propagation delay 45 μs typ

Expected relay life

Mechanical 100,000,000 cycles

Electrical
30 VDC, 1 ADC resistive 500,000 cycles
30 VDC, 2 ADC resistive 100,000 cycles

Electromechanical Relay Outputs

Number of channels 8

¹ Verified by 620 Vrms dielectric withstand test, 5 s.

² All channels—external PC ambient, up to 55 °C.

Power Requirement

5 V ($\pm 5\%$) 400 mA typ,
600 mA max

Physical Characteristics

Dimensions 17.5 cm \times 9.9 cm
(6.9 in. \times 3.9 in.)

Weight 150.0 g (5.29 oz)

Pin Assignments

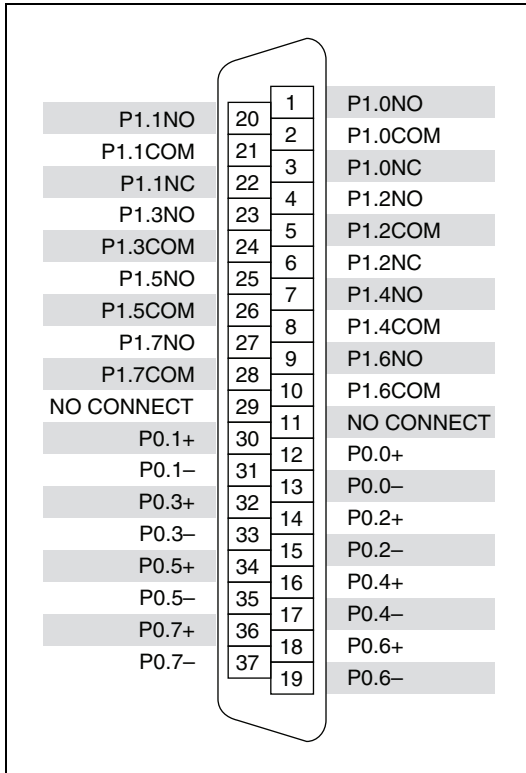


Figure 1. NI 6520 Pin Assignments

Environmental

The NI 6520 device is intended for indoor use only.

Operating Environment

Ambient temperature range 0 to 55 °C
(tested in accordance with
IEC-60068-2-1 and
IEC-60068-2-2)

Relative humidity range 10 to 90%,
noncondensing
(tested in accordance with
IEC-60068-2-56)

Altitude 2,000 m (at 25 °C ambient
temperature)

Pollution Degree 2

Storage Environment

Ambient temperature range -20 to 70 °C
(tested in accordance with
IEC-60068-2-1 and
IEC-60068-2-2)

Relative humidity range 5 to 95%, noncondensing
(tested in accordance with
IEC-60068-2-56)

Safety

This product meets the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326 (IEC 61326): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note For the standards applied to assess the EMC of this product, refer to the [Online Product Certification](#) section.



Note For EMC compliance, operate this device with shielded cabling.

CE Compliance

This product meets the essential requirements of applicable European Directives as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2004/108/EC; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *NI and the Environment* Web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all products must be sent to a WEEE recycling center. For more information about WEEE recycling centers, National Instruments WEEE initiatives, and compliance with WEEE Directive 2002/96/EC on Waste Electrical and Electronic Equipment, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息, 请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Where to Go for Support

The National Instruments Web site is your complete resource for technical support. At ni.com/support you have access to everything from troubleshooting and application development self-help resources to email and phone assistance from NI Application Engineers.

A Declaration of Conformity (DoC) is our claim of compliance with the Council of the European Communities using the manufacturer's declaration of conformity. This system affords the user protection for electromagnetic compatibility (EMC) and product safety. You can obtain the DoC for your product by visiting ni.com/certification. If your product supports calibration, you can obtain the calibration certificate for your product at ni.com/calibration.

National Instruments corporate headquarters is located at 11500 North Mopac Expressway, Austin, Texas, 78759-3504. National Instruments also has offices located around the world to help address your support needs. For telephone support in the United States, create your service request at ni.com/support and follow the calling instructions or dial 512 795 8248. For telephone support outside the United States, contact your local branch office:

Australia 1800 300 800, Austria 43 662 457990-0, Belgium 32 (0) 2 757 0020, Brazil 55 11 3262 3599, Canada 800 433 3488, China 86 21 5050 9800, Czech Republic 420 224 235 774, Denmark 45 45 76 26 00, Finland 358 (0) 9 725 72511, France 01 57 66 24 24, Germany 49 89 7413130, India 91 80 41190000, Israel 972 3 6393737, Italy 39 02 41309277, Japan 0120-527196, Korea 82 02 3451 3400, Lebanon 961 (0) 1 33 28 28, Malaysia 1800 887710, Mexico 01 800 010 0793, Netherlands 31 (0) 348 433 466, New Zealand 0800 553 322, Norway 47 (0) 66 90 76 60, Poland 48 22 328 90 10, Portugal 351 210 311 210, Russia 7 495 783 6851, Singapore 1800 226 5886, Slovenia 386 3 425 42 00, South Africa 27 0 11 805 8197, Spain 34 91 640 0085, Sweden 46 (0) 8 587 895 00, Switzerland 41 56 2005151, Taiwan 886 02 2377 2222, Thailand 662 278 6777, Turkey 90 212 279 3031, United Kingdom 44 (0) 1635 523545

National Instruments, NI, ni.com, and LabVIEW are trademarks of National Instruments Corporation. Refer to the *Terms of Use* section on ni.com/legal for more information about National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents.