

COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash  Get Credit  Receive a Trade-In Deal

OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



Bridging the gap between the manufacturer and your legacy test system.

 1-800-915-6216

 www.apexwaves.com

 sales@apexwaves.com

All trademarks, brands, and brand names are the property of their respective owners.

Request a Quote

 **CLICK HERE**

NI-5742

DEVICE SPECIFICATIONS

NI 5742

32-Channel Signal Generator

This document lists specifications for the NI 5742 adapter module. Pair these specifications with the specifications listed in your NI FlexRIO FPGA specifications document.



Caution To avoid permanent damage to the NI 5742, disconnect all signals connected to the NI 5742 before powering down the module, and only connect signals after the module has been powered on by the FlexRIO FPGA module.



Caution The protection provided by the NI 5742 can be impaired if it is used in a manner not described in this document.



Note All numeric specifications are typical unless otherwise noted.

Specifications are subject to change without notice. For the most recent device specifications, visit ni.com/manuals.


Contents

| | |
|---|---|
| How to Use Your FlexRIO Documentation..... | 2 |
| FlexRIO Documentation Locations..... | 2 |
| Analog Output..... | 3 |
| General Characteristics..... | 3 |
| Typical Specifications..... | 4 |
| Programmable Function Interface (PFI 0, Front Panel Connector)..... | 5 |
| AUX I/O (Port 0 DIO <0..3>, Port 1 DIO <0..3>, and PFI <0..3>)..... | 5 |
| Environment..... | 6 |
| Operating Environment..... | 6 |
| Storage Environment..... | 6 |
| Shock and Vibration..... | 6 |
| Compliance and Certifications..... | 7 |
| Safety..... | 7 |
| Electromagnetic Compatibility..... | 7 |
| CE Compliance..... | 7 |
| Online Product Certification..... | 8 |
| Environmental Management..... | 8 |

How to Use Your FlexRIO Documentation

Refer to the following flowchart for information about how to use FlexRIO documentation.

Figure 1. How to Use Your FlexRIO Documentation

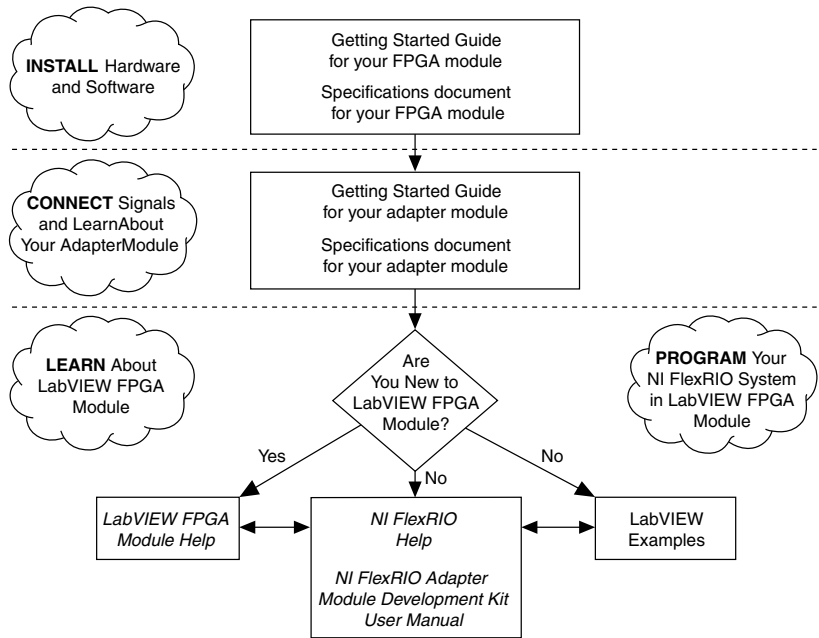

FlexRIO Documentation Locations

Table 1. FlexRIO Documentation Locations and Descriptions

| Document | Location | Description |
|---|---|--|
| Getting started guide for your FPGA module | Available from the Start menu and at ni.com/manuals . | Contains installation instructions for your FlexRIO system. |
| Specifications document for your FPGA module | Available from the Start menu and at ni.com/manuals . | Contains specifications for your FPGA module. |
| Getting started guide for your adapter module | Available from the Start menu and at ni.com/manuals . | Contains signal information, examples, and CLIP details for your adapter module. |

Table 1. FlexRIO Documentation Locations and Descriptions (Continued)

| Document | Location | Description |
|--|---|--|
| Specifications document for your adapter module | Available from the Start menu and at ni.com/manuals . | Contains specifications for your adapter module. |
| <i>LabVIEW FPGA Module Help</i> | Embedded in <i>LabVIEW Help</i> and at ni.com/manuals . | Contains information about the basic functionality of the LabVIEW FPGA Module. |
| <i>NI FlexRIO Help</i> | Available from the Start menu and at ni.com/manuals . | Contains information about the FPGA module, adapter module, and CLIP configuration information. |
| <i>NI FlexRIO Adapter Module Development Kit User Manual</i> | Available from the Start menu at Start»All Programs»National Instruments»NI FlexRIO»NI FlexRIO Adapter Module Development Kit»Documentation. | Contains information about how to create custom adapter modules for use with FlexRIO FPGA modules. |
| LabVIEW Examples | Available in NI Example Finder. In LabVIEW, click Help»Find Examples»Hardware Input and Output»FlexRIO. | Contains examples of how to run FPGA VIs and Host VIs on your device. |
| IPNet | Located at ni.com/ipnet . | Contains LabVIEW FPGA functions and intellectual property to share. |
| NI FlexRIO product page | Located at ni.com/flexrio . | Contains product information and data sheets for FlexRIO devices. |

Analog Output

General Characteristics

Number of channels.....32

Connector type.....VHDCI

| | |
|------------------------------|--|
| Output type..... | Single-ended, DC-coupled |
| Digital data resolution..... | 16-bit, unsigned, binary data ¹ |
| Data update rate..... | Up to 1 MS/s ² |
| Sample Clock sources..... | Internal FPGA-based data clock |
| DAC part number..... | AD5541A |

Related Information

For more information about the DAC, refer to the Analog Devices website.

Typical Specifications

Output impedance.....0.8 Ω , typical

Output current drive..... ± 2 mA

Overdrive protection..... ± 20 V

Glitch

Mid-scale glitch..... ± 10 mV at 3 μ s

Turn-on glitch..... ± 1 V for 2 ms

Noise

Average noise density.....28 nV/ $\sqrt{\text{Hz}}$

RMS noise to 1 MHz (single pole roll-off equivalent).....35 μ V_{rms}

Gain and offset

Full-scale range.....4.996 V \pm 2.3 mV

Offset error..... ± 5.7 mV

Gain error..... $\pm 0.1\%$

Integral non-linearity (INL)

Typical..... ± 0.5 least significant bits (LSB)

Maximum..... ± 2 LSB

Differential non-linearity (DNL)

Typical..... ± 0.5 LSB

Maximum..... ± 1 LSB

¹ Data is written using a U16 data type.

² Each channel can be individually updated.

| | |
|----------------|---------------|
| Settling time | |
| 8 LSB..... | 3.0 μ s |
| 4 LSB..... | 3.8 μ s |
| 2 LSB..... | 5.1 μ s |
| Slew rate..... | 10 V/ μ s |

Programmable Function Interface (PFI 0, Front Panel Connector)

| | |
|----------------|---------------|
| Connector..... | SMA |
| Direction..... | Bidirectional |

AUX I/O (Port 0 DIO <0..3>, Port 1 DIO <0..3>, and PFI <0..3>)

| | |
|------------------------------------|------------------------------------|
| Number of channels..... | 12 bidirectional (8 DIO and 4 PFI) |
| Connector type..... | HDMI |
| Interface standard..... | 3.3 V LVCMOS |
| Interface logic | |
| Maximum V _{IL} | 0.8 V |
| Minimum V _{IH} | 2.0 V |
| Maximum V _{OL} | 0.4 V |
| Minimum V _{OH} | 2.7 V |
| Maximum V _{OH} | 3.6 V |
| Z _{out} | 50 Ω \pm 20% |
| I _{out} (DC)..... | \pm 2 mA |
| Pull-down resistor..... | 150 k Ω |
| Recommended operating voltage..... | -0.3 V to 3.6 V |
| Overvoltage protection..... | \pm 10 V |
| Maximum toggle frequency..... | 100 MHz |
| +5 V maximum power..... | 10 mA |
| +5 V voltage tolerance..... | 4.2 V to 5 V |

Environment

Maximum altitude.....2,000 m (800 mbar) (at 25 °C ambient temperature)

Pollution Degree.....2

Indoor use only.

Operating Environment

Ambient temperature range.....0 °C to 55 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 low temperature limit and MIL-PRF-28800F Class 2 high temperature limit.)

Relative humidity range.....10% to 90%, noncondensing (Tested in accordance with IEC 60068-2-56.)

Storage Environment

Ambient temperature range.....-40 °C to 71 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 limits.)

Relative humidity range.....5% to 95%, noncondensing (Tested in accordance with IEC 60068-2-56.)

Shock and Vibration

Operating shock.....30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Meets MIL-PRF-28800F Class 2 limits.)

Random vibration

 Operating.....5 Hz to 500 Hz, 0.3 g_{rms}

 Nonoperating.....5 Hz to 500 Hz, 2.4 g_{rms} (Tested in accordance with IEC 60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

Compliance and Certifications

Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations, certifications, and additional information, refer to the [Online Product Certification](#) section.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the National Instruments global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.