

## COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

## SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash  Get Credit  Receive a Trade-In Deal

## OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



*Bridging the gap between the manufacturer and your legacy test system.*

 1-800-915-6216

 [www.apexwaves.com](http://www.apexwaves.com)

 [sales@apexwaves.com](mailto:sales@apexwaves.com)

*All trademarks, brands, and brand names are the property of their respective owners.*

**Request a Quote**

 **CLICK HERE**

**PCI-5124**

## SPECIFICATIONS

# PCI-5124

150 MHz Bandwidth, 200 MS/s, 12-Bit PCI Oscilloscope Device

## Contents

---

Definitions.....	2
Conditions.....	2
Vertical.....	3
Analog Input.....	3
Impedance and Coupling.....	3
Voltage Levels.....	3
Accuracy.....	4
Bandwidth and Transient Response.....	5
Spectral Characteristics.....	6
Horizontal.....	10
Sample Clock.....	10
Phase-Locked Loop (PLL) Reference Clock.....	12
CLK IN (Sample Clock and Reference Clock Input).....	12
CLK OUT (Sample Clock and Reference Clock Output).....	12
Trigger.....	13
Reference (Stop) Trigger.....	13
External Trigger.....	15
PFI 0 and PFI 1 (Programmable Function Interface, AUX Front Panel Connectors).....	15
Waveform Specifications.....	16
Calibration.....	16
External Calibration.....	16
Self-Calibration.....	17
Calibration Specifications.....	17
Software.....	17
Driver Software.....	17
Application Software.....	17
Interactive Soft Front Panel and Configuration.....	17
Synchronization.....	18
Dimensions and Weight.....	18
Power.....	19

Environment.....	19
Operating Environment.....	19
Storage Environment.....	19
Compliance and Certifications.....	19
Safety Compliance Standards.....	19
Electromagnetic Compatibility.....	20
CE Compliance .....	20
Product Certifications and Declarations.....	20
Environmental Management.....	20

## Definitions

---

*Warranted* specifications describe the performance of a model under stated operating conditions and are covered by the model warranty. *Warranted* specifications account for measurement uncertainties, temperature drift, and aging. *Warranted* specifications are ensured by design, or verified during production and calibration.

*Characteristics* describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the performance met by a majority of models.
- *Nominal* specifications describe an attribute that is based on design, conformance testing, or supplemental testing.
- *Measured (meas)* specifications describe the measured performance of a representative model.

Specifications are *Typical* unless otherwise noted.

## Conditions

---

Specifications are valid under the following conditions unless otherwise noted.

- All filter settings
- All impedance selections
- Sample clock set to 200 MS/s using onboard clock
- The PCI-5124 module is warmed up for 15 minutes at ambient temperature.
- Calibration cycle is maintained.
- External calibration is performed at  $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$



**Hot Surface** If the PCI-5124 has been in use, it may exceed safe handling temperatures and cause burns. Allow the PCI-5124 to cool before removing it from the chassis.



**Caution** To ensure the specified EMC performance, operate this product only with double-shielded cables (for example, RG-233/U or equivalent) and shielded accessories.



**Caution** You can impair the protection provided by the PCI-5124 if you use it in a manner not described in this document.

## Vertical

### Analog Input

Number of channels	Two (simultaneously sampled)
Connectors	BNC

### Impedance and Coupling

Input impedance (software-selectable)	50 $\Omega$ $\pm$ 2.0% 1 M $\Omega$ $\pm$ 0.75% in parallel with a nominal capacitance of 29 pF
Input coupling (software-selectable)	AC <sup>1</sup> DC GND

### Voltage Levels

**Table 1.** Full Scale (FS) Input Range and Programmable Vertical Offset

Range ( $V_{pk-pk}$ )	Vertical Offset Range	
	50 $\Omega$ Input	1 M $\Omega$ Input
0.2 V	$\pm 0.1$ V	
0.4 V	$\pm 0.2$ V	
1 V	$\pm 0.5$ V	
2 V	$\pm 1$ V	
4 V	$\pm 2$ V	
10 V	—	$\pm 5$ V
20 V (1 M $\Omega$ only)	—	—

Maximum input overload	
50 $\Omega$	7 $V_{rms}$ with $ Peaks  \leq 10$ V
1 M $\Omega$	$ Peaks  \leq 42$ V

<sup>1</sup> AC coupling available on 1 M $\Omega$  input only.

# Accuracy

Resolution

12 bits

**Table 2. DC Accuracy<sup>2</sup>, warranted**

Range (V <sub>pk-pk</sub> )	Accuracy
0.2 V and 0.4 V	±(0.65% of input + 1.8 mV)
1 V and 2 V	±(0.65% of input + 2.1 mV)
4 V, 10 V, and 20 V <sup>3</sup>	±(0.65% of input + 10.0 mV)

Programmable vertical offset accuracy<sup>4</sup> ±0.4% of offset setting, warranted

**Table 3. DC Drift, Nominal**

Range (V <sub>pk-pk</sub> )	50 Ω and 1 MΩ
0.2 V, 0.4 V, 1 V, and 2 V	±(0.057% of input + 0.006% of FS + 100 μV) per °C
4 V, 10 V, and 20 V <sup>3</sup>	±(0.057% of input + 0.006% of FS + 900 μV) per °C

AC amplitude accuracy<sup>4</sup>

50 Ω ±0.06 dB (±0.7%) at 50 kHz

1 MΩ ±0.09 dB (±1.0%) at 50 kHz

Crosstalk<sup>5</sup> ≤-85 dB at 10 MHz

Sparkle code rate<sup>6</sup>

Onboard clock <300 ppt<sup>7</sup>

External clock

200 MHz <300 ppt<sup>7</sup>

150 MHz <3 ppt<sup>7</sup>

100 MHz 0

<sup>2</sup> Programmable vertical offset = 0 V. Within ±5 °C of self-calibration temperature.

<sup>3</sup> 1 MΩ input only.

<sup>4</sup> Within ±5 °C of self-calibration temperature.

<sup>5</sup> CH 0 to/from CH 1, External trigger to CH 0 or CH 1.

<sup>6</sup> Results based on 2×10<sup>12</sup> samples.

<sup>7</sup> ppt = parts per trillion (10<sup>12</sup>).

# Bandwidth and Transient Response

**Table 4.** Bandwidth ( $\pm 3$  dB), Warranted<sup>8, 9</sup>

Input Range ( $V_{pk-pk}$ ) <sup>8</sup>	50 $\Omega$	1 M $\Omega$
0.2 V	85 MHz	75 MHz
All other input ranges	150 MHz	145 MHz up to 40 °C <sup>10</sup>

## Rise/fall time<sup>8</sup>

0.2 $V_{pk-pk}$ input range	3.3 ns
All other input ranges	2.4 ns

## Bandwidth limit filters<sup>11</sup>

Noise filter	20 MHz 2-pole Bessel filter
Anti-alias filter	60 MHz 4-pole elliptical filter

AC coupling cutoff (-3 dB) <sup>12</sup>	12 Hz
--	-------

**Table 5.** Passband Flatness<sup>9</sup>

Filter Settings <sup>9</sup>	Input Range ( $V_{pk-pk}$ )	50 $\Omega$ and 1 M $\Omega$
Filters off	0.2 V	$\pm 0.6$ dB (DC to 20 MHz) $\pm 1.5$ dB (20 MHz to 40 MHz)
	All input ranges except 0.2 V	$\pm 0.5$ dB (DC to 20 MHz) $\pm 1.0$ dB (20 MHz to 50 MHz) $\pm 1.7$ dB (50 MHz to 100 MHz)
Anti-alias filter on	All ranges	-1.0 dB to +2.0 dB (DC to 55 MHz)

<sup>8</sup> Filters off.


<sup>9</sup> Referenced to 50 kHz.

<sup>10</sup> 135 MHz above 40 °C.

<sup>11</sup> Only one filter can be enabled at any given time. The anti-alias filter is enabled by default.

<sup>12</sup> AC coupling available on 1 M $\Omega$  path only.

**Figure 1. PCI-5124 Frequency Response (Measured)**

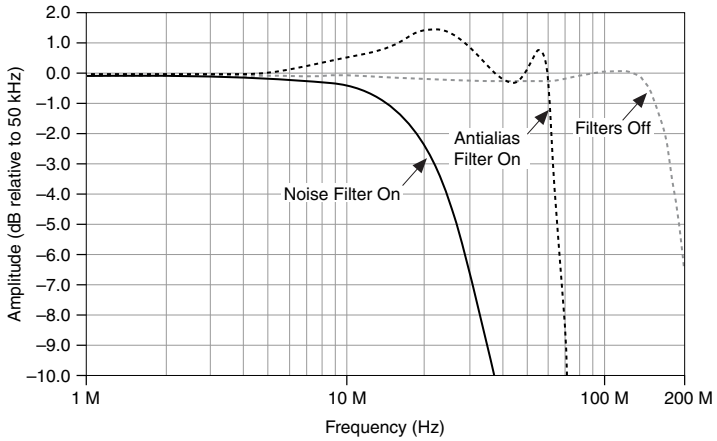

## Spectral Characteristics

**Table 6. Spurious-Free Dynamic Range with Harmonics (SFDR)<sup>13</sup>**

Input Range ( $V_{pk-pk}$ )	50 $\Omega$	1 M $\Omega$
0.2 V	75 dBc	70 dBc
0.4 V	75 dBc	70 dBc
1 V	72 dBc	70 dBc
2 V	72 dBc	70 dBc
4 V	65 dBc	67 dBc
10 V	65 dBc	60 dBc
20 V (1 M $\Omega$ only)	—	60 dBc

<sup>13</sup> Filters off or Anti-alias filter on. 10 MHz, -1 dBFS input signal. Includes the 2nd through the 5th harmonics. Measured from 5 kHz to 100 MHz.

**Table 7. Total Harmonic Distortion (THD)<sup>14</sup>**

Input Range ( $V_{pk-pk}$ )	50 $\Omega$	1 M $\Omega$
0.2 V	-74 dBc	-68 dBc
0.4 V	-74 dBc	-68 dBc
1 V	-72 dBc	-68 dBc
2 V	-72 dBc	-67 dBc
4 V	-63 dBc	-66 dBc
10 V	-63 dBc	-58 dBc
20 V (1 M $\Omega$ only)	—	-58 dBc

Intermodulation distortion ( $V_{pk-pk}$ )<sup>15</sup> -75 dBc

**Table 8. Signal-to-Noise Ratio (SNR)<sup>16</sup>**

Input Range ( $V_{pk-pk}$ )	50 $\Omega$		1 M $\Omega$	
	Filters Off	Anti-alias Filter On	Filters Off	Anti-alias Filter On
0.2 V	57 dB	56 dB	53 dB	55 dB
0.4 V	58 dB	57 dB	55 dB	57 dB
1 V	58 dB	58 dB	57 dB	57 dB
2 V	58 dB	58 dB	57 dB	57 dB
4 V	—	—	56 dB	58 dB

<sup>14</sup> Filters off or Anti-alias filter on. 10 MHz, -1 dBFS input signal. Includes the 2nd through the 5th harmonics.

<sup>15</sup> 0.2 V to 2.0 V input ranges on 50  $\Omega$  input. Filters off or Anti-alias filter on. Two tones at 10.2 MHz and 11.2 MHz. Each tone is -7 dBFS.


<sup>16</sup> Excludes harmonics. 10 MHz, -1 dBFS input signal. Measured from DC to 100 MHz.



**Table 9.** Signal to Noise and Distortion (SINAD)<sup>17</sup>

Input Range ( $V_{pk-pk}$ )	50 $\Omega$		1 M $\Omega$	
	Filters Off	Anti-alias Filter On	Filters Off	Anti-alias Filter On
0.2 V	57 dB	56 dB	53 dB	55 dB
0.4 V	58 dB	57 dB	55 dB	57 dB
1 V	58 dB	58 dB	57 dB	57 dB
2 V	58 dB	58 dB	57 dB	57 dB
4 V	—	—	56 dB	57 dB

**Figure 2.** PCI-5124 Dynamic Performance, 50  $\Omega$ , 1 V Input Range, 262,144-Point FFT, Measured

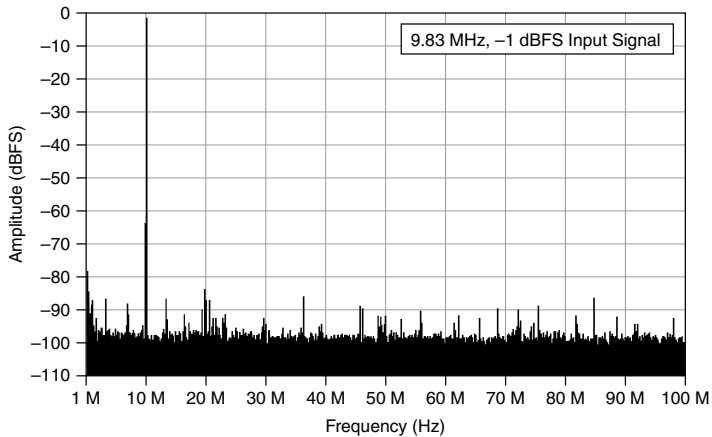

**Table 10.** RMS Noise (Noise filter on; 50  $\Omega$  terminator connected to input)

Input Range ( $V_{pk-pk}$ )	50 $\Omega$	1 M $\Omega$
0.2 V	106 $\mu V_{rms}$ (0.053% FS)	116 $\mu V_{rms}$ (0.058% FS)
0.4 V	188 $\mu V_{rms}$ (0.047% FS)	192 $\mu V_{rms}$ (0.048% FS)
1 V	470 $\mu V_{rms}$ (0.047% FS)	480 $\mu V_{rms}$ (0.048% FS)
2 V	940 $\mu V_{rms}$ (0.047% FS)	960 $\mu V_{rms}$ (0.048% FS)

<sup>17</sup> Includes harmonics. 10 MHz, -1 dBFS input signal. Measured from DC to 100 MHz.

**Table 10.** RMS Noise (Noise filter on; 50  $\Omega$  terminator connected to input) (Continued)

Input Range ( $V_{pk-pk}$ )	50 $\Omega$	1 M $\Omega$
4 V	1.88 mV <sub>rms</sub> (0.047% FS)	1.92 mV <sub>rms</sub> (0.048% FS)
10 V	4.7 mV <sub>rms</sub> (0.047% FS)	4.8 mV <sub>rms</sub> (0.048% FS)
20 V (1 M $\Omega$ only)	—	9.4 mV <sub>rms</sub> (0.047% FS)


**Table 11.** RMS Noise (Anti-alias filter on; 50  $\Omega$  terminator connected to input)

Input Range ( $V_{pk-pk}$ )	50 $\Omega$	1 M $\Omega$
0.2 V	126 $\mu$ V <sub>rms</sub> (0.063% FS)	146 $\mu$ V <sub>rms</sub> (0.073% FS)
0.4 V	200 $\mu$ V <sub>rms</sub> (0.05% FS)	216 $\mu$ V <sub>rms</sub> (0.054% FS)
1 V	500 $\mu$ V <sub>rms</sub> (0.05% FS)	510 $\mu$ V <sub>rms</sub> (0.051% FS)
2 V	1.0 mV <sub>rms</sub> (0.05% FS)	1.02 mV <sub>rms</sub> (0.051% FS)
4 V	2.04 mV <sub>rms</sub> (0.051% FS)	2.16 mV <sub>rms</sub> (0.054% FS)
10 V	5.1 mV <sub>rms</sub> (0.051% FS)	5.2 mV <sub>rms</sub> (0.052% FS)
20 V (1 M $\Omega$ only)	—	10.2 mV <sub>rms</sub> (0.051% FS)


**Table 12.** RMS Noise (Filters off; 50  $\Omega$  terminator connected to input)

Input Range ( $V_{pk-pk}$ )	50 $\Omega$	1 M $\Omega$
0.2 V	128 $\mu$ V <sub>rms</sub> (0.064% FS)	184 $\mu$ V <sub>rms</sub> (0.092% FS)
0.4 V	204 $\mu$ V <sub>rms</sub> (0.051% FS)	264 $\mu$ V <sub>rms</sub> (0.066% FS)
1 V	510 $\mu$ V <sub>rms</sub> (0.051% FS)	550 $\mu$ V <sub>rms</sub> (0.055% FS)
2 V	1.02 mV <sub>rms</sub> (0.051% FS)	1.08 mV <sub>rms</sub> (0.054% FS)
4 V	2.08 mV <sub>rms</sub> (0.052% FS)	2.6 mV <sub>rms</sub> (0.065% FS)
10 V	5.2 mV <sub>rms</sub> (0.052% FS)	5.5 mV <sub>rms</sub> (0.055% FS)
20 V (1 M $\Omega$ only)	—	10.6 mV <sub>rms</sub> (0.053% FS)

**Figure 3.** PCI-5124 Spectral Noise Density on 0.2 V Input Range, Noise Filter Enabled, 1 M $\Omega$  Input Impedance, Nominal

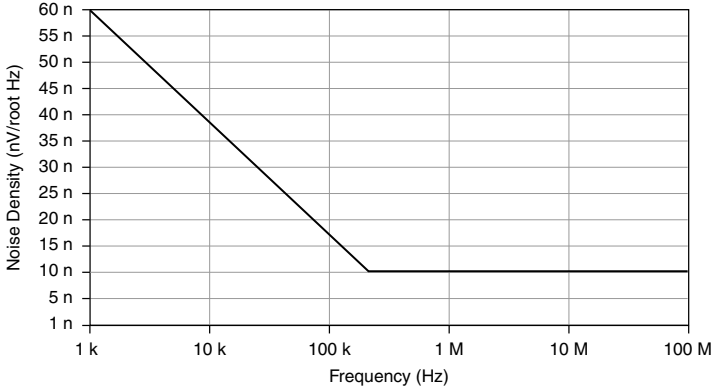

**Figure 4.** PCI-5124 Spectral Noise Density on 0.2 V Input Range, Full Bandwidth, 50  $\Omega$  Input Impedance, Nominal

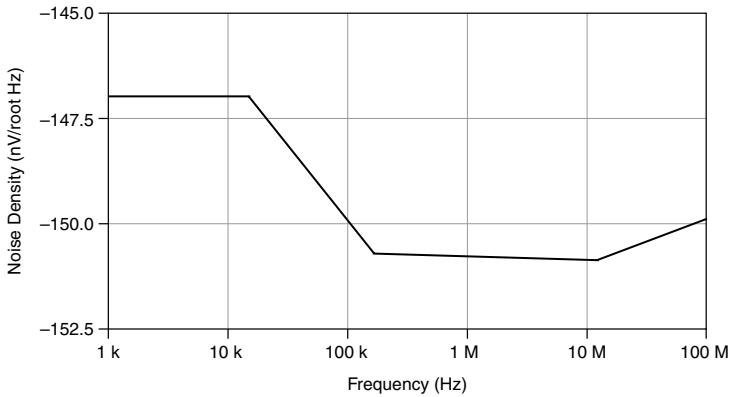

## Horizontal

## Sample Clock

### Sources

Internal	Onboard clock (internal VCXO) <sup>18</sup>
External	CLK IN (front panel SMB connector)

<sup>18</sup> Internal Sample clock is locked to the Reference clock or derived from the onboard VCXO.

## Onboard Clock (Internal VCXO)

Sample rate range	
Real-time sampling (single shot)	3.052 kS/s to 200 MS/s <sup>19</sup>
Random interleaved sampling (RIS)	400 MS/s to 4 GS/s in multiples of 200 MS/s
Phase noise density <sup>20</sup>	<-100 dBc/Hz at 100 Hz <-120 dBc/Hz at 1 kHz <-130 dBc/Hz at 10 kHz
Sample clock jitter <sup>21</sup>	≤1 ps <sub>rms</sub> (100 Hz to 100 kHz) ≤2 ps <sub>rms</sub> (100 Hz to 1 MHz)
Timebase frequency	200 MHz
Timebase accuracy	
Not phase-locked to Reference clock	±25 ppm, Warranted
Phase-locked to Reference clock	Equal to the Reference clock accuracy
Sample clock delay range	±1 Sample clock period
Sample clock delay/adjustment resolution	≤5 ps

### Related Information

*For more information about Sample clock and decimation, refer to the [NI High-Speed Digitizers Help](https://ni.com/manuals), available at [ni.com/manuals](https://ni.com/manuals).*

## External Sample Clock

Sources	CLK IN (front panel SMB connector)
Frequency range <sup>22</sup>	50 MHz to 210 MHz (CLK IN)
Duty cycle tolerance	45% to 55%
Exported Reference clock destinations	CLK OUT (front panel SMB connector) PFI <0..1> (front panel 9-pin mini-circular DIN connector) RTSI <0..7>

### Related Information

*For more information about Sample clock and decimation, refer to the [NI High-Speed Digitizers Help](https://ni.com/manuals), available at [ni.com/manuals](https://ni.com/manuals).*

<sup>19</sup> Divide by  $n$  decimation used for all rates less than 200 MS/s.

<sup>20</sup> 10 MHz input signal.

<sup>21</sup> Includes the effects of the converter aperture uncertainty and the clock circuitry jitter. Excludes trigger jitter.

<sup>22</sup> Divide by  $n$  decimation available where  $1 \leq n \leq 65,535$ .

## Sample Clock Exporting

**Table 13.** Exported Sample Clock Destinations

Destination	Maximum Frequency
CLK OUT (front panel SMB connector)	210 MHz
PXI_Trig <0..6> <sup>23</sup>	20 MHz
PFI <0..1> (front panel 9-pin mini-circular DIN connector) <sup>23</sup>	25 MHz

## Phase-Locked Loop (PLL) Reference Clock

Sources	RTSI 7 CLK IN (front panel SMB connector)
Frequency range	5 MHz to 20 MHz in 1 MHz increments <sup>24</sup>
Duty cycle tolerance	45% to 55%
Exported Reference clock destinations	CLK OUT (front panel SMB connector) PFI <0..1> (front panel 9-pin mini-circular DIN connector) RTSI <0..7>

## CLK IN (Sample Clock and Reference Clock Input)

Connector	SMB jack
Input voltage range	
Sine wave ( $V_{pk-pk}$ )	0.65 V to 2.8 V (0 dBm to 13 dBm)
Square wave ( $V_{pk-pk}$ )	0.2 V to 2.8 V
Maximum input overload	7 $V_{rms}$ with  Peaks  ≤10 V
Impedance	50 $\Omega$
Coupling	AC

## CLK OUT (Sample Clock and Reference Clock Output)

Connector	SMB jack
Output impedance	50 $\Omega$
Logic type	3.3 V CMOS
Maximum drive current	±48 mA

<sup>23</sup> Decimated Sample clock only.

<sup>24</sup> Default of 10 MHz. The PLL Reference clock frequency must be accurate to ±50 ppm.

# Trigger

---

## Reference (Stop) Trigger



**Note** Refer to the following sections and the *NI High-Speed Digitizers Help* for more information about what sources are available for each trigger type.

Trigger types	Edge Window Hysteresis Video Digital Immediate Software
Trigger sources	CH 0 CH 1 TRIG RTSI <0..6> Software
Time resolution	
Time-to-digital conversion circuit (TDC) on	
Onboard clock	50 ps
External clock	N/A
TDC off	
Onboard clock	5 ns
External clock	External clock period
Minimum rearm time <sup>25</sup>	
TDC on	10 μs
TDC off	2 μs
Holdoff	
Onboard clock	
TDC on	10 μs to 85.899 s
TDC off	2 μs to 85.899 s
External clock (TDC off)	$200 \times \text{External clock period to } (2^{32} - 1) \times \text{External clock period}$

---

<sup>25</sup> Holdoff set to 0. Onboard Sample clock at maximum rate.

## Analog Trigger

Trigger types	Edge Window Hysteresis
Sources	CH 0 (front panel BNC connector) CH 1 (front panel BNC connector) TRIG (front panel BNC connector)
Trigger level range	
CH 0, CH 1	100% of FS
TRIG (External Trigger)	±5 V
Trigger level resolution	10 bits (1 in 1,024)
Edge trigger sensitivity, warranted	
CH 0, CH 1	3.5% FS up to 50 MHz Increases to 10% FS at 150 MHz
TRIG (external trigger), $V_{pk-pk}$	0.25 V up to 100 MHz Increases to 1 V at 200 MHz
Level accuracy	
CH 0, CH 1	±4.7% FS up to 10 MHz
TRIG (External Trigger)	±0.35 V up to 10 MHz
Trigger jitter	≤80 ps <sub>rms</sub> <sup>26</sup>
Trigger filters	
Low-frequency (LF) reject	50 kHz
High-frequency (HF) reject	50 kHz

## Digital Trigger

Trigger type	Digital
Sources	RTSI <0..6> PFI <0..1> (front panel SMB connector)

## Video Trigger

Trigger type	Video
Sources	CH 0 (front panel BNC connector) CH 1 (front panel BNC connector) TRIG (front panel BNC connector)

<sup>26</sup> Within ±5 °C of self-calibration temperature.

Video trigger types	Specific line Any line Specific field
Standards	Negative sync of NTSC, PAL, or SECAM signal

## External Trigger

Connector	TRIG (front panel BNC connector)
Impedance	1 M $\Omega$ in parallel with 22 pF
Coupling	AC DC
AC-coupling cutoff (-3 dB)	12 Hz
Input voltage range	$\pm 5$ V
Maximum input overload	Peaks  $\leq 42$ V

## PFI 0 and PFI 1 (Programmable Function Interface, AUX Front Panel Connectors)

Connector	9-pin mini-circular DIN
Direction	Bidirectional
As an input (trigger)	
Destinations	Start trigger (acquisition arm) Reference (stop) trigger Arm Reference trigger Advance trigger
Input impedance	150 k $\Omega$ , nominal
V <sub>IH</sub>	2.0 V
V <sub>IL</sub>	0.8 V
Maximum input overload	-0.5 V to 5.5 V
Maximum frequency	25 MHz



## As an output (event)

Sources	Start trigger (acquisition arm) Reference (stop) trigger End of Record Done (end of acquisition) Probe Compensation <sup>27</sup>
Output impedance	50 $\Omega$
Logic type	3.3 V CMOS
Maximum drive current	$\pm 24$ mA
Maximum frequency	25 MHz

## Waveform Specifications

Onboard memory sizes	8 MB per channel (4 MS per channel) 32 MB per channel (16 MS per channel) 256 MB per channel (128 MS per channel)
Minimum record length	1 sample
Number of pretrigger samples	Zero up to full record length <sup>28</sup>
Number of posttrigger samples	Zero up to full record length <sup>28</sup>
Maximum number of records in onboard memory	
8 MB per channel	21,845
32 MB per channel	87,381
256 MB per channel	100,000 <sup>29</sup>
Allocated onboard memory per record	$(Record\ Length \times 2\ bytes/S) + 200\ bytes$ , rounded up to next multiple of 128 bytes or 384 bytes, whichever is greater

## Calibration

### External Calibration

External calibration calibrates the VCXO and the voltage reference. All calibration constants are stored in nonvolatile memory.

<sup>27</sup> 1 kHz, 50% duty cycle square wave, PFI 1 only.

<sup>28</sup> Single-record mode and multiple-record mode.

<sup>29</sup> It is possible to exceed these numbers if you fetch records while acquiring data.

## Self-Calibration

Self-calibration is done on software command. The calibration corrects for gain, offset, frequency response, triggering, and timing adjustment errors for all input ranges.

## Calibration Specifications

Interval for external calibration	2 years
Warm-up time <sup>30</sup>	15 minutes

## Software

---

### Driver Software

Driver support for this device was first available in NI-SCOPE 2.7.

NI-SCOPE is an IVI-compliant driver that allows you to configure, control, and calibrate the PCI-5124. NI-SCOPE provides application programming interfaces for many development environments.

### Application Software

NI-SCOPE provides programming interfaces, documentation, and examples for the following application development environments:

- LabVIEW
- LabWindows™/CVI™
- Measurement Studio
- Microsoft Visual C/C++
- .NET (C# and VB.NET)

### Interactive Soft Front Panel and Configuration

When you install NI-SCOPE on a 64-bit system, you can monitor, control, and record measurements from the PCI-5124 using InstrumentStudio.

InstrumentStudio is a software-based front panel application that allows you to perform interactive measurements on several different device types in a single program.



**Note** InstrumentStudio is supported only on 64-bit systems. If you are using a 32-bit system, use the NI-SCOPE-specific soft front panel instead of InstrumentStudio.

InstrumentStudio and the NI-SCOPE SFP are included on the NI-SCOPE media.

NI Measurement & Automation Explorer (MAX) also provides interactive configuration and test tools for the PCI-5124. MAX is included on the driver media.

---

<sup>30</sup> Warm-up time begins after the NI-SCOPE driver is loaded.

# Synchronization

## Synchronization with the NI-TCIk API<sup>31</sup>

NI-TCIk is an API that enables system synchronization of supported PXI modules in one or more PXI chassis, which you can use with the PCI-5124 and NI-SCOPE.

NI-TCIk uses a shared Reference Clock and triggers to align the Sample Clocks of PXI modules and synchronize the distribution and reception of triggers. These signals are routed through the PXI chassis backplane without external cable connections between PXI modules in the same chassis.

---

Module-to-module skew, between PCI-5124 modules using NI-TCIk<sup>32</sup>

NI-TCIk synchronization without manual adjustment <sup>33</sup>	
Skew, Peak-to-Peak <sup>34</sup>	500 ps
NI-TCIk synchronization with manual adjustment <sup>33</sup>	
Skew after manual adjustment	<10 ps
Sample Clock delay/adjustment resolution	≤5 ps

---

## Dimensions and Weight

Dimensions	35.5 cm × 2.0 cm × 11.3 cm (14.0 in × 0.8 in × 4.4 in)
Weight	455 g (16 oz)

---

<sup>31</sup> NI-TCIk installs with NI-SCOPE.

<sup>32</sup> Although you can use NI-TCIk to synchronize non-identical modules, these specifications apply only to synchronizing identical modules. Specifications are valid under the following conditions:

- All modules installed in the same chassis.
- All filters are disabled.
- NI-TCIk used to align the sample clocks of each module.
- All parameters set to identical values for each module.
- Self-calibration completed.
- Ambient temperature within ±1 °C of self-calibration.

For other configurations, including multi-chassis systems, contact NI Technical Support at [ni.com/support](http://ni.com/support).

<sup>33</sup> Manual adjustment is the process of minimizing synchronization jitter and skew by adjusting Trigger Clock (TCIk) signals using the instrument driver.

<sup>34</sup> Caused by clock and analog delay differences. No manual adjustment performed.

# Power

---

## Current draw

+3.3 VDC	1.3 A
+5 VDC	2.7 A
+12 VDC	130 mA
-12 VDC	0 A
Total power	19.4 W

---

# Environment

---

Maximum altitude	2,000 m (at 25 °C ambient temperature)
Pollution Degree	2

---

Indoor use only.

# Operating Environment

Ambient temperature range	0 °C to 45 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2.)
Relative humidity range	10% to 90%, noncondensing (Tested in accordance with IEC 60068-2-56.)

---

# Storage Environment

Ambient temperature range	-40 °C to 71 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2.)
Relative humidity range	5% to 95%, noncondensing (Tested in accordance with IEC 60068-2-56.)

---

# Compliance and Certifications

---

## Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



**Note** For UL and other safety certifications, refer to the product label or the *Product Certifications and Declarations* section.

# Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



**Note** In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



**Note** Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



**Note** For EMC declarations, certifications, and additional information, refer to the [Product Certifications and Declarations](#) section.

## CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

## Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit [ni.com/product-certifications](https://ni.com/product-certifications), search by model number, and click the appropriate link.

## Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Commitment to the Environment* web page at [ni.com/environment](https://ni.com/environment). This page contains the environmental regulations and directives

with which NI complies, as well as other environmental information not included in this document.

## Waste Electrical and Electronic Equipment (WEEE)



**EU Customers** At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit [ni.com/environment/weee](https://ni.com/environment/weee).

## 电子信息产品污染控制管理办法（中国 RoHS）



**中国客户** National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china)。(For information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](https://ni.com/environment/rohs_china).)

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at [ni.com/trademarks](http://ni.com/trademarks) for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at [ni.com/patents](http://ni.com/patents). You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at [ni.com/legal/export-compliance](http://ni.com/legal/export-compliance) for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2004—2019 National Instruments. All rights reserved.

376933D-01 August 16, 2019