

## COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

## SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash    Get Credit    Receive a Trade-In Deal

## OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



*Bridging the gap between the manufacturer and your legacy test system.*

 1-800-915-6216

 [www.apexwaves.com](http://www.apexwaves.com)

 [sales@apexwaves.com](mailto:sales@apexwaves.com)

All trademarks, brands, and brand names are the property of their respective owners.

**Request a Quote**

 **CLICK HERE**

**PXI-2522**

# NI PXI-2522 Specifications

## 53-Channel SPDT Relay Module

This document lists specifications for the NI PXI-2522 general-purpose relay module. All specifications are subject to change without notice. Visit [ni.com/manuals](http://ni.com/manuals) for the most current specifications.



**Caution** The protection provided by the NI PXI-2522 can be impaired if it is used in a manner not described in this document.

Topology ..... 53-channel SPDT, non-latching

Refer to the *NI Switches Help* for detailed topology information.

## About These Specifications

---

*Specifications* characterize the warranted performance of the instrument under the stated operating conditions.

*Typical Specifications* are specifications met by the majority of the instrument under the stated operating conditions and are tested at 23 °C ambient temperature. Typical specifications are not warranted.

All voltages are specified in DC, AC<sub>pk</sub>, or a combination unless otherwise specified.



**Caution** Refer to the *Read Me First: Safety and Electromagnetic Compatibility* document for important safety and electromagnetic compatibility information. To obtain a copy of this document online, visit [ni.com/manuals](http://ni.com/manuals), and search for the document title.



**Caution** To ensure the specified EMC performance, operate this product only with shielded cables and accessories.

## Input Characteristics

---

Maximum switching voltage

Channel-to-channel ..... 100 V

Channel-to-ground ..... 100 V, CAT I



**Caution** This module is rated for Measurement Category I and intended to carry signal voltages no greater than 100 V. This module can withstand up to 500 V impulse voltage. Do *not* use this module for connection to signals or for measurements within

Categories II, III, or IV. Do not connect to MAINS supply circuits (for example, wall outlets) of 115 or 230 VAC. Refer to the *Read Me First: Safety and Electromagnetic Compatibility* document for more information on measurement categories.



**Caution** When hazardous voltages ( $>42.4 V_{pk}/60 \text{ VDC}$ ) are present on any relay terminal, safety low-voltage ( $\leq 42.4 V_{pk}/60 \text{ VDC}$ ) cannot be connected to any other relay terminal.



**Caution** The switching power is limited by the maximum switching current, the maximum voltage, and must not exceed 60 W, 62.5 VA.

Maximum switching power (per channel) ..... 60 W, 62.5 VA (DC to 60 Hz)

Maximum current  
(switching or carry, per channel) ..... 2 A

Simultaneous channels at maximum  
current ( $\leq 55^\circ\text{C}$ ) ..... 40

Minimum switching conditions ..... 20 mV/1 mA



**Note** Switching inductive loads (for example, motors and solenoids) can produce high voltage transients in excess of the module's rated voltage. Without additional protection, these transients can interfere with module operation and impact relay life. For more information about transient suppression, visit [ni.com/info](http://ni.com/info) and enter the Info Code `relayflyback`.

DC path resistance  
Initial .....  $<0.5 \Omega$   
End-of-life .....  $\geq 1.0 \Omega$

DC path resistance typically remains low for the life of the relay. At the end of relay life, the path resistance rises rapidly above  $1 \Omega$ . Load ratings apply to relays used within the specification before the end of relay life.

Thermal EMF (typical at  $23^\circ\text{C}$ ) .....  $12 \mu\text{V}$

Bandwidth (-3 dB, typical at  $23^\circ\text{C}$ )  
 $50 \Omega$  termination .....  $\leq 51 \text{ MHz}$

Crosstalk (typical at  $23^\circ\text{C}$ ,  $50 \Omega$  termination)  
Channel-to-channel  
10 kHz .....  $\leq -70 \text{ dB}$   
100 kHz .....  $\leq -50 \text{ dB}$

Isolation (typical at  $23^\circ\text{C}$ ,  $50 \Omega$  termination)  
Open channel  
10 kHz .....  $\geq 75 \text{ dB}$   
100 kHz .....  $\geq 50 \text{ dB}$

# Dynamic Characteristics

---

## Relay operate time

Typical .....	1 ms
Maximum.....	3.4 ms

Simultaneous drive limit..... 40 relays



**Note** Certain applications may require additional time for proper settling. For information about including additional settling time, refer to the *NI Switches Help*.

## Expected relay life

Mechanical.....	$1 \times 10^8$ cycles
Electrical (resistive)	
30 V, 1 A.....	$5 \times 10^5$ cycles
30 V, 2 A.....	$1 \times 10^5$ cycles



**Note** The relays used in the NI PXI-2522 are field replaceable. Refer to the *NI Switches Help* for information about replacing a failed relay.

# Trigger Characteristics

---

## Input trigger

Sources.....	PXI trigger lines 0-7
Minimum pulse width.....	150 ns



**Note** The NI PXI-2522 can recognize trigger pulse widths less than 150 ns if you disable digital filtering. For information about disabling digital filtering, refer to the *NI Switches Help*.

## Output trigger

Destinations .....	PXI trigger lines 0-7
Pulse width .....	Programmable (1 $\mu$ s to 62 $\mu$ s)

# Physical Characteristics

---

Relay type .....	Electromechanical, non-latching
Relay contact material .....	Palladium-ruthenium, gold covered
I/O connector .....	160 DIN 41612, 160 positions, male
PXI power requirement .....	7 W at 5 V, 2.5 W at 3.3 V

Dimensions (L × W × H) .....	3U, one slot, PXI/cPCI module 21.6 × 2.0 × 13.0 cm (8.5 × 0.8 × 5.1 in.)
Weight .....	192 g (6.77 oz)

## Environment

---

Operating temperature .....	0 °C to 55 °C
Storage temperature .....	-20 °C to 70 °C
Relative humidity .....	5% to 85% noncondensing
Pollution Degree .....	2
Maximum altitude .....	2,000 m
Indoor use only.	

## Shock and Vibration

---

Operational Shock .....	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Test profile developed in accordance with MIL-PRF-28800F.)
Random Vibration	
Operating .....	5 to 500 Hz, 0.3 g <sub>rms</sub>
Nonoperating .....	5 to 500 Hz, 2.4 g <sub>rms</sub> (Tested in accordance with IEC 60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

# Diagrams

---

Figure 1 shows the NI PXI-2522 in power-on state.

**Figure 1.** NI PXI-2522 Power-On State

---


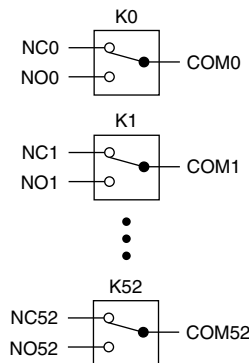


Figure 2 shows the NI PXI-2522 connector pinout.

**Figure 2. NI PXI-2522 Connector Pinout**

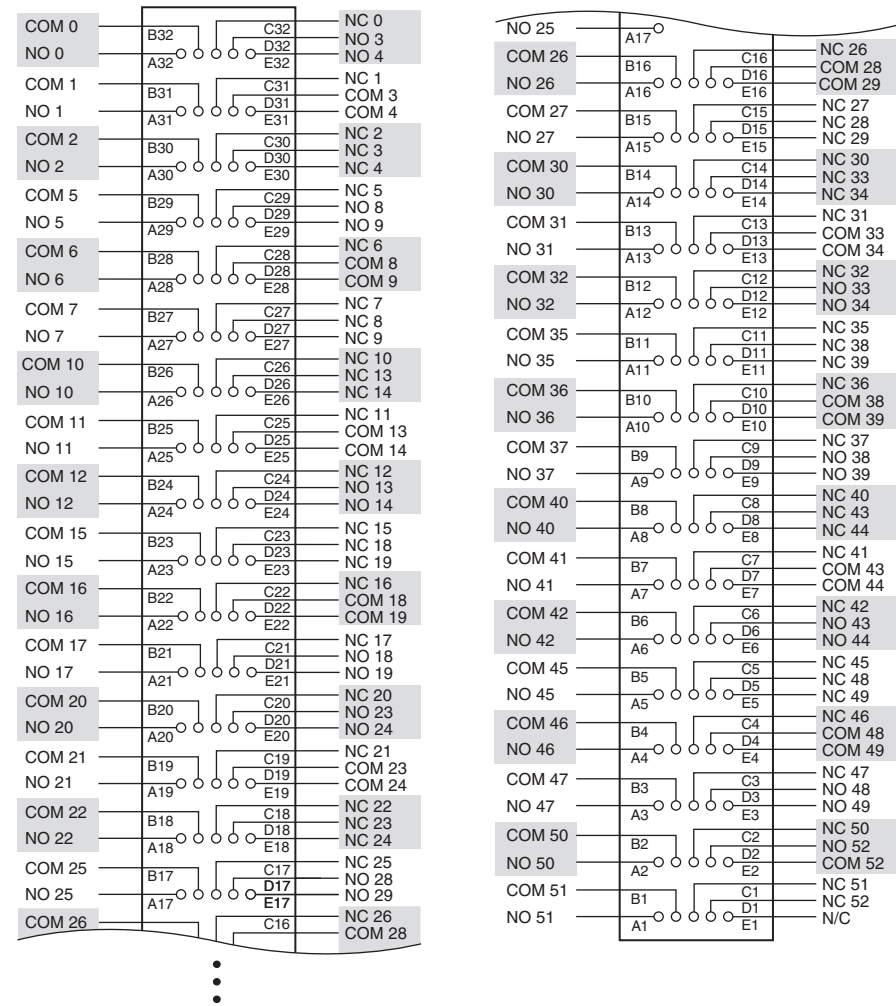

# Accessories

Visit [ni.com](http://ni.com) for more information about the following accessories.

**Table 1.** NI Accessories for the NI PXI-2522

Accessory	Part Number
DIN160 to 50 Pin DSUB switch cable, 1 m	782417-03
DIN160 to DIN160 switch cable, 1 m	782417-02
DIN160 to bare wire switch cable, 1 m	782417-01
Relay replacement kit	781089-10

# Compliance and Certifications

## Safety

This product meets the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1



**Note** For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

# Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



**Note** In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.



**Note** Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.





**Note** For EMC declarations and certifications, and additional information, refer to the *Online Product Certification* section.

## CE Compliance

This product meets the essential requirements of applicable European Directives as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2004/108/EC; Electromagnetic Compatibility Directive (EMC)

## Online Product Certification

To obtain product certifications and the Declaration of Conformity (DoC) for this product, visit [ni.com/certification](http://ni.com/certification), search by model number or product line, and click the appropriate link in the Certification column.

## Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at [ni.com/environment](http://ni.com/environment). This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

## Waste Electrical and Electronic Equipment (WEEE)



**EU Customers** At the end of the product life cycle, all products *must* be sent to a WEEE recycling center. For more information about WEEE recycling centers, National Instruments WEEE initiatives, and compliance with WEEE Directive 2002/96/EC on Waste Electrical and Electronic Equipment, visit [ni.com/environment/weee](http://ni.com/environment/weee).

## 电子信息产品污染控制管理办法（中国 RoHS）



**中国客户** National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china)。(For information about China RoHS compliance, go to [ni.com/environment/rohs\\_china](http://ni.com/environment/rohs_china).)

LabVIEW, National Instruments, NI, ni.com, the National Instruments corporate logo, and the Eagle logo are trademarks of National Instruments Corporation. Refer to the *Trademark Information* at [ni.com/trademarks](http://ni.com/trademarks) for other National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patents Notice* at [ni.com/patents](http://ni.com/patents). You can find information about end-user license agreements (EULAs) and third-party legal notices in the NI-SWITCH Readme. Refer to the *Export Compliance Information* at [ni.com/legal/export-compliance](http://ni.com/legal/export-compliance) for the National Instruments global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data.

© 2013 National Instruments. All rights reserved.