

COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash  Get Credit  Receive a Trade-In Deal

OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



Bridging the gap between the manufacturer and your legacy test system.

 1-800-915-6216

 www.apexwaves.com

 sales@apexwaves.com

All trademarks, brands, and brand names are the property of their respective owners.

Request a Quote

 **CLICK HERE**

PXI-8423-2

SPECIFICATIONS AND FEATURES GUIDE

NI Serial Legacy Hardware

This document lists safety and compliance information for NI Serial legacy hardware, as well as physical specifications, software features, and recommended operating conditions.

Contents

| | |
|---|----|
| NI Legacy Serial Interfaces | 2 |
| Serial Hardware Features | 5 |
| Connectors and Pinouts | 6 |
| DB-9 Male | 6 |
| DB-25 Male | 7 |
| 10-Position Modular Jack (10P10C) | 8 |
| 68-Pin Connector | 9 |
| 100-Pin Connector | 11 |
| Cables and Accessories | 13 |
| RS-232, RS-422, and RS-485 | 14 |
| RS-232, RS-422, and RS-485 Features | 14 |
| RS-232 Loopback | 14 |
| RS-232 Signals | 14 |
| RS-485/422 Loopback | 15 |
| RS-485/422 Signals | 15 |
| RS-485 Topologies | 15 |
| RS-485 Transceiver Control | 16 |
| UART Data Frame Example | 16 |
| Hardware Specifications | 17 |
| Legacy PCI Serial Hardware | 17 |
| Environmental Characteristics (for All PCI Interfaces) | 20 |
| Other Specifications | 21 |
| Safety | 21 |
| Legacy PXI Serial Hardware | 22 |
| Environmental Characteristics (for All Legacy PXI Interfaces) | 26 |
| Other Specifications | 26 |
| Safety | 27 |
| Where to Go for Support | 28 |

Table 2. PXI Interfaces

| PXI Interfaces | Standard | # Ports | Isolated | Max Baud (kbits/s) | Connector Type* | FIFO Size (Bytes) |
|----------------|---------------|---------|----------|--------------------|-----------------|-------------------|
| PXI-8420/2 | RS-232 | 2 | No | 115.2 | DB-9 male | 64 |
| PXI-8420/4 | RS-232 | 4 | No | 115.2 | 10P10C | 64 |
| PXI-8420/8 | RS-232 | 8 | No | 115.2 | 68-pin SCSI | 64 |
| PXI-8420/16 | RS-232 | 16 | No | 115.2 | 100-pin SCSI | 64 |
| PXI-8421/2 | RS-485/RS-422 | 2 | No | 460.8 | DB-9 male | 64 |
| PXI-8421/4 | RS-485/RS-422 | 4 | No | 460.8 | 10P10C | 64 |
| PXI-8421/8 | RS-485/RS-422 | 8 | No | 460.8 | 68-pin SCSI | 64 |
| PXI-8422/2 | RS-232 | 2 | Yes | 115.2 | DB-9 male | 64 |
| PXI-8422/4 | RS-232 | 4 | Yes | 115.2 | 10P10C | 64 |
| PXI-8423/2 | RS-485/RS-422 | 2 | Yes | 460.8 | DB-9 male | 64 |
| PXI-8423/4 | RS-485/RS-422 | 4 | Yes | 460.8 | 10P10C | 64 |

* Serial connector cables end in DB-9 male serial connectors.

National Instruments considers the following baud rates to be standard. NI serial hardware supports these rates up to the maximum rate specified.

| | |
|-------|--------|
| 300 | 19200 |
| 600 | 38400 |
| 1200 | 57600 |
| 2400 | 115200 |
| 4800 | 230400 |
| 9600 | 460800 |
| 14400 | |

To set the baud rate, set the VISA Baud attribute or use the Windows SetCommState function and pass the actual value of the baud rate in the **BaudRate** field of the **DCB** structure.

Refer to [Hardware Specifications](#) for supported baud rates on each board.

Serial Hardware Features

To determine which features your product supports, refer to the following table.

Table 3. Serial Hardware Features

| Hardware | Adjustable FIFO Settings | Get Interface Type | RS-485 Transceiver Control | RS-485 Socketed Bias Resistors | RS-485 Programmatically Controlled Bias Resistors | RS-232 Transceiver State | RS-232 DTE/DCE Transceiver Control | Hardware Implemented Flow Control* | | |
|---|--------------------------------|--------------------------|----------------------------------|---|--|--------------------------------|---|--|-------------|--------------|
| | | | | | | | | RTS/ CTS | DTR/ DSR | Xon/ Xoff |
| PCI-232, PXI-8420, PXI-8422 | ✓ | ✓ | | | | | | ✓ | | ✓† |
| PCI-485 eight port, PXI-8421 eight port | ✓ | ✓ | ✓ | | | | | ✓ | | ✓† |
| All other PCI-485, PXI-8421, and PXI-8423 | ✓ | ✓ | ✓ | ✓ | | | | ✓ | | ✓† |
| * Requires NI-Serial 3.5 or higher, for both Windows or LabVIEW RT. † Not supported in LabVIEW RT. | | | | | | | | | | |

Connectors and Pinouts

DB-9 Male

Figure 1. DB-9 Connector Pin Locations



Table 4. DB-9 Male Pin Descriptions

| Pin | 232 DTE | 232 DCE | 422/485 |
|---|---------|---------|-------------|
| 1 | DCD* | DCD | GND |
| 2 | RXD | TXD | CTS+ (HSI+) |
| 3 | TXD | RXD | RTS+ (HSO+) |
| 4 | DTR* | DSR | RXD+ |
| 5 | GND | GND | RXD- |
| 6 | DSR* | DTR | CTS- (HSI-) |
| 7 | RTS | CTS | RTS- (HSO-) |
| 8 | CTS | RTS | TXD+ |
| 9 | RI* | RI | TXD- |
| * These signals are “No Connect” on the PCI-232I and PXI-8422 ports and ports 9 to 16 on legacy 16-port boards. | | | |



Note DCE mode supported on USB-232/2 and USB-232/4 only.

DB-25 Male

Figure 2. DB-25 Connector Pin Locations




Table 5. DB-25 Pin Descriptions

| Pin | 232 | 422/485 |
|--|------|-------------|
| 2 | TXD | RTS+ (HSO+) |
| 3 | RXD | CTS+ (HSI+) |
| 4 | RTS | RTS- (HSO-) |
| 5 | CTS | TXD+ |
| 6 | DSR* | CTS- (HSI-) |
| 7 | GND | RXD- |
| 8 | DCD* | GND |
| 20 | DTR* | RXD+ |
| 22 | RI* | TXD- |
| * These signals are “No Connect” on the PCI-232I and PXI-8422 ports. | | |



Note Pins not listed in this table are “No Connect.”

10-Position Modular Jack (10P10C)

Figure 3. 10-Position Modular Jack Pin Locations

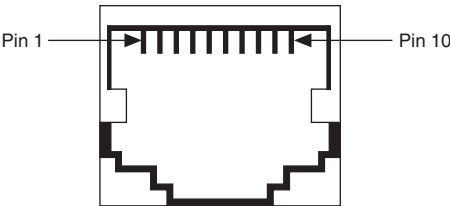


Table 6. 10-Position Modular Jack Pin Descriptions

| Pin | 232 | 422/485 |
|-----|------------|-------------|
| 1 | No Connect | No Connect |
| 2 | RI* | TXD- |
| 3 | CTS | TXD+ |
| 4 | RTS | RTS- (HSO-) |
| 5 | DSR* | CTS- (HSI-) |
| 6 | GND | RXD- |
| 7 | DTR* | RXD+ |
| 8 | TXD | RTS+ (HSO+) |
| 9 | RXD | CTS+ (HSI+) |
| 10 | DCD* | GND |

* These signals are “No Connect” on the PCI-232I and PXI-8422 ports.

68-Pin Connector

The following figure and table give the 68-pin connector pin locations and descriptions. The SCSI 68-pin connector and VHDCI 68-pin connector have the same pinout.

Figure 4. 68-Pin SCSI Connector Pin Locations

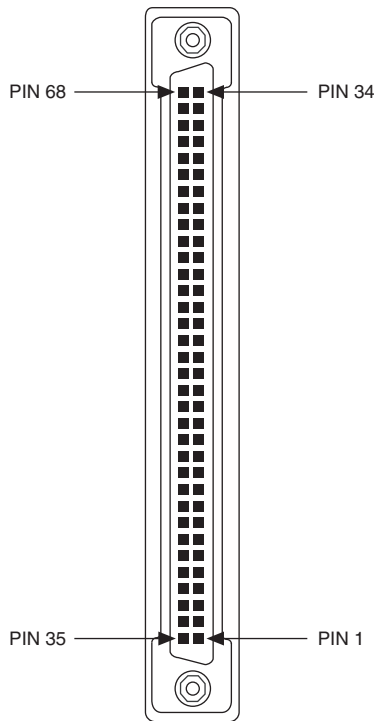


Table 7. 68-Pin Connector Pin Descriptions

| 68-Pin Connector Port | | | | | | | | 485 Signal | 485 D-Sub 9 Connector | 232 Signal | 232 D-Sub 9 Connector |
|-----------------------|----|----|----|----|----|----|---|------------|-----------------------|------------|-----------------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | | |
| 66 | 57 | 49 | 40 | 32 | 23 | 15 | 6 | RXD- | 5 | DCD | 1 |
| 68 | 59 | 51 | 42 | 34 | 25 | 17 | 8 | CTS+ | 2 | RXD | 2 |
| 65 | 56 | 48 | 39 | 31 | 22 | 14 | 5 | RTS+ | 3 | TXD | 3 |
| 64 | 55 | 47 | 38 | 30 | 21 | 13 | 4 | RXD+ | 4 | DTR | 4 |
| 60 | 60 | 43 | 43 | 26 | 26 | 9 | 9 | GND | 1 | GND | 5 |
| 63 | 54 | 46 | 37 | 29 | 20 | 12 | 3 | CTS- | 6 | DSR | 6 |
| 62 | 53 | 45 | 36 | 28 | 19 | 11 | 2 | RTS- | 7 | RTS | 7 |
| 61 | 52 | 44 | 35 | 27 | 18 | 10 | 1 | TXD+ | 8 | CTS | 8 |
| 67 | 58 | 50 | 41 | 33 | 24 | 16 | 7 | TXD- | 9 | RI | 9 |

100-Pin Connector

The following figure and table give the pin locations and descriptions of the 100-pin connector.

Figure 5. 100-Pin Connector Pin Locations

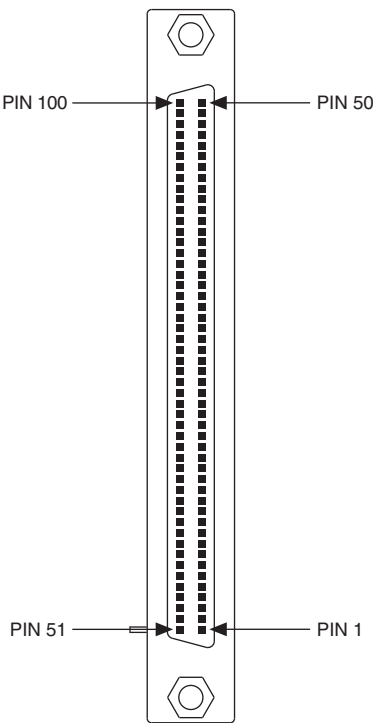


Table 8. 100-Pin Connector Pin Descriptions

| 100-Pin Connector Port | | | | | | | | | | | | | | | | 232 Signal | 232 D-Sub 9 Connector |
|------------------------|----|----|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|------------|-----------------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | | |
| 2 | 46 | 6 | 42 | 10 | 38 | 14 | 34 | — | — | — | — | — | — | — | — | DCD* | 1 |
| 3 | 47 | 7 | 43 | 11 | 39 | 15 | 35 | 18 | 32 | 20 | 30 | 22 | 28 | 24 | 26 | RXD | 2 |
| 4 | 48 | 8 | 44 | 12 | 40 | 16 | 36 | 19 | 33 | 21 | 31 | 23 | 29 | 25 | 27 | TXD | 3 |
| 5 | 49 | 9 | 45 | 13 | 41 | 17 | 37 | — | — | — | — | — | — | — | — | DTR* | 4 |
| 1 | 1 | 1 | 1 | 50 | 50 | 50 | 50 | 51 | 51 | 51 | 51 | 100 | 100 | 100 | 100 | GND | 5 |
| 52 | 96 | 56 | 92 | 60 | 88 | 64 | 84 | — | — | — | — | — | — | — | — | DSR* | 6 |
| 53 | 97 | 57 | 93 | 61 | 89 | 65 | 85 | 68 | 82 | 70 | 80 | 72 | 78 | 74 | 76 | RTS | 7 |
| 54 | 98 | 58 | 94 | 62 | 90 | 66 | 86 | 69 | 83 | 71 | 81 | 73 | 79 | 75 | 77 | CTS | 8 |
| 55 | 99 | 59 | 95 | 63 | 91 | 67 | 87 | — | — | — | — | — | — | — | — | RI* | 9 |

* These signals are not supported on ports 9 to 16 of the PCI-232/16 and PXI-8420/16 serial boards.

Cables and Accessories

The following serial cables and accessories are available from National Instruments. Refer to ni.com for more information.

Table 9. Serial Cables and Accessories

| Part Number | Description |
|--|---|
| Adapter Cables (DB-9 and DB-25 connectors have jacksockets unless otherwise specified.) | |
| 182844-01 | DB-9 RS485 terminating pass-through connector 120 Ω |
| 182845-01 | Serial cable, 10P10C modular plug to DB-9 male, 1 m |
| 182845-02 | Serial cable, 10P10C modular plug to DB-9 male, 2 m |
| 182845-03 | Serial cable, 10P10C modular plug to DB-9 male, 3 m |
| 182846-01 | Serial cable, 10P10C modular plug to DB-25 male, 1 m |
| 184428-01 | Serial cable, 10P10C modular plug to DB-9 male, 1 m, isolated |
| 199022-02 | Serial cable, 10P10C to DB-9 male, jackscrews, 2 m |
| 197545-01 | Serial cable, 68-pin VHDCI to eight DB-9 male, RS-232, 1 m |
| 197546-01 | Serial cable, 68-pin VHDCI to eight DB-9 male, RS-485, 1 m |
| Extension and Null-Modem Cables (All cables have jackscrews.) | |
| 182238-01 | Serial cable, RS232 null modem, DB-9 female to DB-9 female, 1 m |
| 182238-02 | Serial cable, RS232 null modem, DB-9 female to DB-9 female, 2 m |
| 182238-04 | Serial cable, RS232 null modem, DB-9 female to DB-9 female, 4 m |
| 183045-01 | Serial cable, RS232 straight through, DB-9 female to DB-9 female, 1 m |
| 183045-02 | Serial cable, RS232 straight through, DB-9 female to DB-9 female, 2 m |
| 183045-04 | Serial cable, RS232 straight through, DB-9 female to DB-9 female, 4 m |
| 183283-01 | Serial cable, RS485/RS422 null modem, DB-9 female to DB-9 female, 1 m |
| 183283-02 | Serial cable, RS485/RS422 null modem, DB-9 female to DB-9 female, 2 m |
| 183283-04 | Serial cable, RS485/RS422 null modem, DB-9 female to DB-9 female, 4 m |

RS-232, RS-422, and RS-485

RS-232, RS-422, and RS-485 Features


Table 10. RS-232, RS-422, and RS-485 Features

| Feature | RS-232 | RS-422 | RS-485 |
|-----------------------------|--------------|--------------|--------------|
| Type of transmission lines | Single ended | Differential | Differential |
| Maximum number of drivers | 1 | 1 | 32 |
| Maximum number of receivers | 1 | 10 | 32 |
| Maximum cable length | 50 ft | 4,000 ft | 4,000 ft |
| Maximum CMV | ± 25 V | ±7 V | +12 to -7 V |
| Driver output* | 5 to 25 V | 2 to 6 V | 1.5 to 6 V |
| Driver load | <3 kΩ | 100 Ω | 60 Ω |

* Actual driver output varies depending on cable length and load.


RS-232 Loopback

Figure 6. RS-232 Loopback




RS-232 Signals

Figure 7. RS-232 Signals



RS-485/422 Loopback

Figure 8. RS-485/422 Loopback



RS-485/422 Signals

Figure 9. RS-485/422 Signals

| |
|----------------------------------|
| If '-' < '+' then MARK, '1' |
| If '-' > '+' then SPACE, '0' |
| RS-422 Voltage: ± 7 V |
| RS-485 Voltage: -7 V to +12 V |

RS-485 Topologies

Figure 10. 2-Wire Multidrop Network Using Terminating Resistors


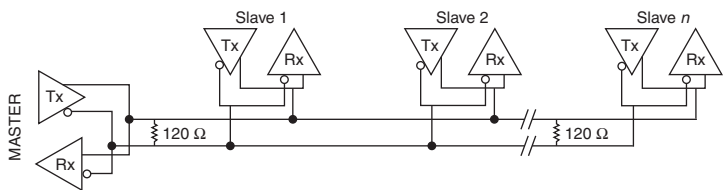


Figure 11. 4-Wire Full-Duplex Multidrop Network Using Terminating Resistors

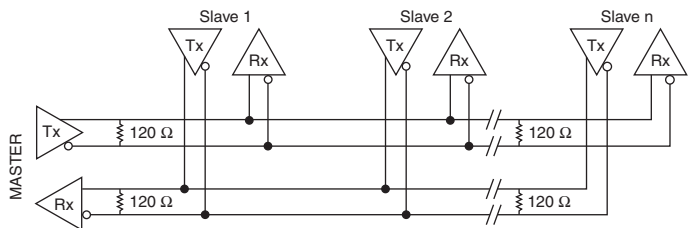

The driver directly supports 4-wire full-duplex operation on peer-to-peer RS-485 networks. Multidrop RS-485 networks require additional software development.

RS-485 terminators are available at ni.com/serial.


RS-485 Transceiver Control

| Enable | 4-Wire | 2-Wire | | |
|--------|--------|----------|-------------------------|------------------------|
| | | DTR/Echo | DTR/No Echo | Auto |
| TX | ON | DTR | DTR | TX |
| RX | ON | ON | $\overline{\text{DTR}}$ | $\overline{\text{TX}}$ |

The available modes might vary with the controller or interface used. For further information refer to [ni.com/kb](#) and search for KnowledgeBase **67KEP64G**.

UART Data Frame Example

0xD9—8 Data Bits, Odd Parity, 1 Stop Bit

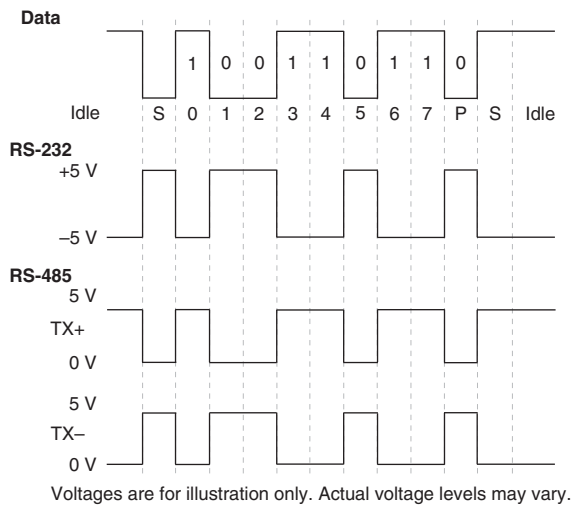

Hardware Specifications

Legacy PCI Serial Hardware

This section describes the characteristics of the legacy PCI serial hardware and the recommended operating conditions.

PCI-232/2 (RS-232) and PCI-485/2 (RS-485/422)

| | |
|--------------------------------------|-------------------------------------|
| Dimensions | 10.67 × 14.22 cm (4.2 × 5.6 in.) |
| I/O connector | DB-9 male connector |
| Power requirement (from PCI channel) | |
| PCI-485/2 | |
| +5 VDC..... | 350 mA typical 750 mA maximum |
| PCI-232/2 | |
| +5 VDC..... | 50 mA typical 100 mA maximum |
| ±12 VDC..... | 20 mA typical 200 mA maximum |

Maximum baud rate

| | |
|----------------|------------|
| PCI-232/2..... | 115.2 kbps |
| PCI-485/2..... | 430.8 kbps |

Boards support standard baud rates below the maximum.

PCI-232/4 (RS-232) and PCI-485/4 (RS-485/422)

| | |
|--------------------------------------|-------------------------------------|
| Dimensions | 10.67 × 14.22 cm (4.2 × 5.6 in.) |
| I/O connector ¹ | 10-position modular jack (10P10C) |
| Power requirement (from PCI channel) | |
| PCI-485/4 | |
| +5 VDC..... | 700 mA typical 1.3 A maximum |
| PCI-232/4 | |
| +5 VDC..... | 70 mA typical 150 mA maximum |
| ±12 VDC..... | 40 mA typical 400 mA maximum |

¹ The four-port legacy PCI serial boards require a cable to convert the 10-position modular jack (10P10C) to either DB-9 or DB-25 male connectors.

Maximum baud rate

| | |
|-----------------|------------|
| PCI-232/4 | 115.2 kbps |
| PCI-485/4 | 430.8 kbps |

Boards support standard baud rates below the maximum.

PCI-232/8 (RS-232) and PCI-485/8 (RS-485/422)

| | |
|------------------|-------------------------------------|
| Dimensions | 10.67 × 14.48 cm (4.2 × 5.7 in.) |
|------------------|-------------------------------------|

| | |
|----------------------------------|-----------------------------|
| I/O connector ¹ | 68-pin, SCSI type connector |
|----------------------------------|-----------------------------|

Power requirement (from PCI channel)

| | |
|---------------|----------------------------------|
| PCI-485/8 | |
| +5 VDC | 1.1 A typical 2.0 A maximum |
| PCI-232/8 | |
| +5 VDC | 100 mA typical 180 mA maximum |
| ±12 VDC | 80 mA typical 800 mA maximum |

Maximum baud rate

| | |
|-----------------|------------|
| PCI-232/8 | 115.2 kbps |
| PCI-485/8 | 430.8 kbps |

Boards support standard baud rates below the maximum.

PCI-232/16 (RS-232)

| | |
|------------------|-------------------------------------|
| Dimensions | 10.67 × 17.52 cm (4.2 × 6.9 in.) |
|------------------|-------------------------------------|

| | |
|----------------------------------|------------------------------|
| I/O connector ² | 100-pin, SCSI type connector |
|----------------------------------|------------------------------|

Power requirement (from PCI channel)

| | |
|--------------|----------------------------------|
| PCI-232/16 | |
| +5 VDC | 250 mA typical 500 mA maximum |

| | |
|-------------------------|------------|
| Maximum baud rate | 115.2 kbps |
|-------------------------|------------|

Board supports standard baud rates below the maximum.

¹ The eight-port legacy PCI serial boards require a cable, included in your kit, to convert the 68-pin connector to eight DB-9 male connectors.

² The 16-port legacy PCI serial boards require a breakout box, included in your kit, to separate the 100-pin SCSI connector to 16 DB-9 male connectors.

PCI-232i/2 (RS-232) and PCI-485i/2 (RS-485/422)

| | |
|--------------------------------------|---|
| Dimensions | 10.67 × 17.52 cm (4.2 × 6.9 in.) |
| I/O connector | DB-9 male connector |
| Operating rated voltage (continuous) | |
| RS-232 | -25 V to +25 V |
| RS-485 | -7 V to +12 V |
| Isolation voltages | |
| Port-to-port | |
| Continuous | 60 VDC (CAT I) |
| Withstand | 2000 V _{rms} , verified by a 5 s dielectric withstand test |
| Port-to-host | |
| Continuous | 60 VDC (CAT I) |
| Withstand | 2000 V _{rms} , verified by a 5 s dielectric withstand test |
| Power requirement (from PCI channel) | |
| PCI-485i/2 | |
| +5 VDC | 800 mA typical 1.3 A maximum |
| PCI-232i/2 | |
| +5 VDC | 400 mA typical 650 mA maximum |
| Maximum baud rate | |
| PCI-232i/2 | 115.2 kbps |
| PCI-485i/2 | 430.8 kbps |

Boards support standard baud rates below the maximum.

PCI-232i/4 (RS-232) and PCI-485i/4 (RS-485/422)

| | |
|--------------------------------------|-------------------------------------|
| Dimensions | 10.67 × 17.44 cm (4.2 × 6.9 in.) |
| I/O connector ¹ | 10-position modular jack (10P10C) |
| Operating rated voltage (continuous) | |
| RS-232 | -25 V to +25 V |
| RS-485 | -7 V to +12 V |

¹ The four-port legacy PCI serial boards require a cable to convert the 10-position (10P10C) modular jack to either DB-9 or DB-25 male connectors.

Isolation voltages

Port-to-port

| | |
|------------------|---|
| Continuous | 60 VDC (CAT I) |
| Withstand | 2000 V _{rms} , verified by a 5 s dielectric withstand test |

Port-to-host

| | |
|------------------|---|
| Continuous | 60 VDC (CAT I) |
| Withstand | 2000 V _{rms} , verified by a 5 s dielectric withstand test |

Power requirement (from PCI channel)

PCI-485i/4

| | |
|--------------|---------------|
| +5 VDC | 1.0 A typical |
| | 1.5 A maximum |

PCI-232i/4

| | |
|--------------|----------------|
| +5 VDC | 500 mA typical |
| | 750 mA maximum |

Maximum baud rate

| | |
|------------------|------------|
| PCI-232i/4 | 115.2 kbps |
| PCI-485i/4 | 430.8 kbps |

Boards support standard baud rates below the maximum.

Environmental Characteristics (for All PCI Interfaces)

Operating Environment

| | |
|---------------------------|--|
| Ambient temperature | 0 to 55 °C (Tested in accordance with IEC-60068-2-1 and IEC-60068-2-2.) |
| Relative humidity | 10 to 90%, noncondensing (Tested in accordance with IEC-60068-2-56.) |
| Altitude (maximum) | 2,000 m |
| Pollution Degree | 2 |
| Indoor use only. | |

Storage Environment

| | |
|---------------------------|--|
| Ambient temperature | -20 to 70 °C (Tested in accordance with IEC-60068-2-1 and IEC-60068-2-2.) |
| Relative humidity | 5 to 95%, noncondensing (Tested in accordance with IEC-60068-2-56.) |

Other Specifications

Maximum cable length

| | |
|---------------------------|---|
| RS-485 ¹ | 30 m (limited by EMC/surge) |
| RS-232 | 2,500 pF equivalent (TIA-EIA-232-F 2.1.4) |

Data line ESD protection (human body model)

| | |
|--------------|--------|
| RS-485 | ±15 kV |
| RS-232 | ±15 kV |



Note This equipment is intended for indoor use only.

Safety

This product meets the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326 (IEC 61326): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note For the standards applied to assess the EMC of this product, refer to the [Online Product Certification](#) section.



Note For EMC compliance, operate this device with shielded cabling.

CE Compliance



This product meets the essential requirements of applicable European Directives as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2004/108/EC; Electromagnetic Compatibility Directive (EMC)

¹ RS-485 is capable of 1.2 km (4,000 ft) without surge limitation.

Online Product Certification


Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all products *must* be sent to a WEEE recycling center. For more information about WEEE recycling centers, National Instruments WEEE initiatives, and compliance with WEEE Directive 2002/96/EC on Waste and Electronic Equipment, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Legacy PXI Serial Hardware

This section describes the characteristics of the legacy PXI serial hardware and the recommended operating conditions.

PXI-8420/2 (RS-232) and PXI-8421/2 (RS-485/422)

| | |
|--------------------------------------|-----------------------------------|
| Dimensions | 100 × 160 mm (3.94 × 6.37 in.) |
| I/O connector | DB-9 male connector |
| Power requirement (from PXI channel) | |
| PXI-8420/2 | |
| +5 VDC | 100 mA typical 150 mA maximum |
| ±12 VDC | 20 mA typical 200 mA maximum |

PXI-8421/2

| | |
|-------------|----------------------------------|
| +5 VDC..... | 350 mA typical 750 mA maximum |
|-------------|----------------------------------|

Maximum baud rate

| | |
|------------------|------------|
| PXI-8420/2 | 115.2 kbps |
| PXI-8421/2 | 430.8 kbps |

Boards support standard baud rates below the maximum.

PXI-8420/4 (RS-232) and PXI-8421/4 (RS-485/422)

| | |
|------------------|-----------------------------------|
| Dimensions | 100 × 160 mm (3.94 × 6.37 in.) |
|------------------|-----------------------------------|

| | |
|----------------------------------|-----------------------------------|
| I/O connector ¹ | 10-position modular jack (10P10C) |
|----------------------------------|-----------------------------------|

Power requirement (from PXI channel)

PXI-8420/4

| | |
|--------------|----------------------------------|
| +5 VDC..... | 125 mA typical 200 mA maximum |
| ±12 VDC..... | 40 mA typical 400 mA maximum |

PXI-8421/4

| | |
|-------------|----------------------------------|
| +5 VDC..... | 350 mA typical 750 mA maximum |
|-------------|----------------------------------|

Maximum baud rate

| | |
|------------------|------------|
| PXI-8420/4 | 115.2 kbps |
| PXI-8421/4 | 430.8 kbps |

Boards support standard baud rates below the maximum.

PXI-8420/8 (RS-232) and PXI-8421/8 (RS-485/422)

| | |
|------------------|-----------------------------------|
| Dimensions | 100 × 160 mm (3.94 × 6.37 in.) |
|------------------|-----------------------------------|

| | |
|----------------------------------|-----------------------------|
| I/O connector ² | 68-pin, SCSI type connector |
|----------------------------------|-----------------------------|

Power requirement (from PXI channel)

PXI-8420/8

| | |
|--------------|----------------------------------|
| +5 VDC..... | 150 mA typical 250 mA maximum |
| ±12 VDC..... | 80 mA typical 800 mA maximum |

¹ The four-port legacy PXI serial boards require a cable to convert the 10-position modular jack (10P10C) to either DB-9 or DB-25 male connectors.

² The eight-port legacy PXI serial boards require a cable, included in your kit, to convert the 68-pin connector to eight DB-9 male connectors.

PXI-8421/8

| | |
|--------------|---------------|
| +5 VDC | 1.1 A typical |
| | 2.0 A maximum |

Maximum baud rate

PXI-8420/8..... 115.2 kbps

PXI-8421/8..... 430.8 kbps

Boards support standard baud rates below the maximum.

PXI-8420/16 (RS-232)

Dimensions 100 × 160 mm
(3.94 × 6.37 in.)

I/O connector¹ 100-pin, SCSI type connector

Power requirement (from PXI channel)

PXI-8420/16

| | |
|--------------|----------------|
| +5 VDC | 500 mA typical |
| | 750 mA maximum |

Maximum baud rate 115.2 kbps

Board supports standard baud rates below the maximum.

PXI-8422/2 (RS-232) and PXI-8423/2 (RS-485/422)

Dimensions 100 × 160 mm
(3.94 × 6.37 in.)

I/O connector DB-9 male connector

Operating rated voltage (continuous)

RS-232 -25 V to +25 V

RS-485 -7 V to + 12 V

Isolation voltages

Port-to-port

Continuous 60 VDC (CAT I)

Withstand 2000 V_{rms}, verified by a 5 s dielectric withstand test

Port-to-host

Continuous 60 VDC (CAT I)

Withstand 2000 V_{rms}, verified by a 5 s dielectric withstand test

¹ The 16-port legacy PXI serial boards require a breakout box, included in your kit, to separate the 100-pin connector to 16 DB-9 male connectors.

Power requirement (from PXI channel)

PXI-8422/2

+5 VDC..... 400 mA typical
650 mA maximum

PXI-8423/2

+5 VDC..... 800 mA typical, 1.3 A maximum

Maximum baud rate

PXI-8422/2 115.2 kbps

PXI-8423/2 430.8 kbps

Boards support standard baud rates below the maximum.

PXI-8422/4 (RS-232) and PXI-8423/4 (RS-485/422)

Dimensions 100 × 160 mm
(3.94 × 6.37 in.)

I/O connector¹..... 10-position modular jack (10P10C)

Operating rated voltage (continuous)

RS-232..... -25 V to +25 V

RS-485..... -7 V to + 12 V

Isolation voltages

Port-to-port

Continuous..... 60 VDC (CAT I)

Withstand 2000 V_{rms},
verified by a 5 s dielectric withstand test

Port-to-host

Continuous..... 60 VDC (CAT I)

Withstand 2000 V_{rms},
verified by a 5 s dielectric withstand test

Power requirement (from PXI channel)

PXI-8422/4

+5 VDC..... 500 mA typical
750 mA maximum

PXI-8423/4

+5 VDC..... 1.0 A typical
1.5 A maximum

¹ The four-port legacy PXI serial boards require a cable to convert the 10-position modular jack (10P10C) to either DB-9 or DB-25 male connectors.

| | |
|-------------------|------------|
| Maximum baud rate | |
| PXI-8422/4..... | 115.2 kbps |
| PXI-8423/4..... | 430.8 kbps |

Boards support standard baud rates below the maximum.

Environmental Characteristics (for All Legacy PXI Interfaces)

Operating Environment

| | |
|---------------------------|--|
| Ambient temperature | 0 to 55 °C |
| | (Tested in accordance with IEC-60068-2-1 and IEC-60068-2-2.) |
| Relative humidity | 10 to 90%, noncondensing |
| | (Tested in accordance with IEC-60068-2-56.) |
| Altitude (maximum) | 2,000 m |
| Pollution Degree | 2 |
| Indoor use only. | |

Storage Environment

| | |
|---------------------------|--|
| Ambient temperature | -20 to 70 °C |
| | (Tested in accordance with IEC-60068-2-1 and IEC-60068-2-2.) |
| Relative humidity | 5 to 95%, noncondensing |
| | (Tested in accordance with IEC-60068-2-56.) |

Other Specifications

| | |
|---|---|
| Maximum cable length | |
| RS-485 ¹ | 30 m (limited by EMC/surge) |
| RS-232 | 2,500 pF equivalent (TIA-EIA-232-F 2.1.4) |
| Data line ESD protection (human body model) | |
| RS-485 | ±15 kV |
| RS-232 | ±15 kV |



Note This equipment is intended for indoor use only.

¹ RS-485 is capable of 1.2 km (4,000 ft) without surge limitation.

Safety

This product meets the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326 (IEC 61326): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note For the standards applied to assess the EMC of this product, refer to the [Online Product Certification](#) section.



Note For EMC compliance, operate this device with shielded cabling.

CE Compliance

This product meets the essential requirements of applicable European Directives as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2004/108/EC; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all products *must* be sent to a WEEE recycling center. For more information about WEEE recycling centers, National Instruments WEEE initiatives, and compliance with WEEE Directive 2002/96/EC on Waste and Electronic Equipment, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Where to Go for Support

The NI website is your complete resource for technical support. At ni.com/support you have access to everything from troubleshooting and application development self-help resources to email and phone assistance from NI Application Engineers.

Visit ni.com/services for NI Factory Installation Services, repairs, extended warranty, and other services.

Visit ni.com/register to register your NI product. Product registration facilitates technical support and ensures that you receive important information updates from NI.

A Declaration of Conformity (DoC) is our claim of compliance with the Council of the European Communities using the manufacturer's declaration of conformity. This system affords the user protection for electromagnetic compatibility (EMC) and product safety. You can obtain the DoC for your product by visiting ni.com/certification. If your product supports calibration, you can obtain the calibration certificate for your product at ni.com/calibration.

NI corporate headquarters is located at 11500 North Mopac Expressway, Austin, Texas, 78759-3504. NI also has offices located around the world. For telephone support in the United States, create your service request at ni.com/support or dial 1 866 ASK MYNI (275 6964). For telephone support outside the United States, visit the Worldwide Offices section of ni.com/niglobal to access the branch office websites, which provide up-to-date contact information, support phone numbers, email addresses, and current events.

Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for more information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patents Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2010–2017 National Instruments. All rights reserved.