
PXI-2555

Specifications

2025-07-22



Contents

PXI-2555 Specifications 3

PXI-2555 Specifications

PXI-2555 Specifications

These specifications apply to the PXI-2555.

All specifications are subject to change without notice.



Note To ensure the specified EMC performance, operate this product only with shielded cables and accessories.



Note Device relays might change state momentarily during electrostatic discharge.



Note Refer to the ***Read Me First: Safety and Electromagnetic Compatibility*** document at ni.com/manuals for important safety and compliance information.

About These Specifications

Specifications characterize the warranted performance of the instrument under the stated operating conditions. Data in this document are **Specifications** unless otherwise noted.

Typical Specifications are specifications met by the majority of the instrument under the stated operating conditions and are tested at 23 °C ambient temperature. Typical specifications are not warranted.

All voltages are specified in DC, AC_{pk}, or a combination unless otherwise specified.



Caution The protection provided by the PXI-2555 can be impaired if it is used in a manner not described in this document.

PXI-2555 Pinout

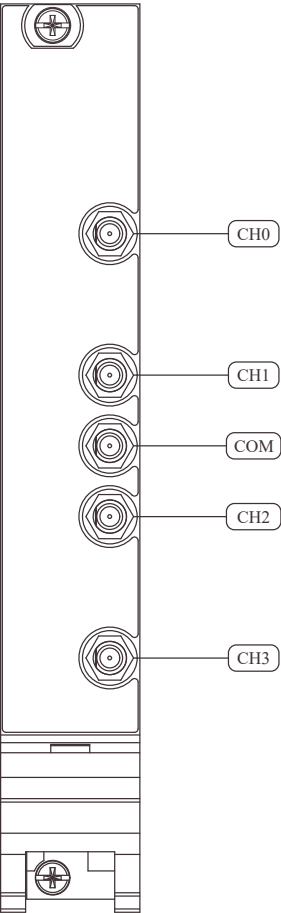


Table 1. Signal Descriptions

Signal	Description
CHx	Signal connection with optional termination
COM	Routing destination for all channels with optional termination

Related information:

- [PXI-2555 Hardware Diagram](#)
- [NI Switches Cable and Accessory Compatibility](#)

Topology

Topology	Terminated 4 × 1 multiplexer
----------	------------------------------

Input Characteristics



Note All input characteristics are DC, AC_{rms} , or a combination unless otherwise specified.

Maximum switching voltage	30 V
Maximum switching current (per channel)	0.5 A
Maximum carry current (per channel)	0.5 A
Maximum RF power	10 W (channel to common), 1.5 W (termination)



Caution The switching power is limited by the maximum switching current and the maximum voltage. Channel to common switching power must not exceed 10 W.



Note Terminations cannot withstand the full rated power of the PXI-2555.



Note National Instruments recommends against switching active RF signals. As a relay actuates, the channel is momentarily unterminated. Some RF sources can be damaged by reflections if their outputs are not properly terminated. Refer to your RF source documentation for more information.



Note Switching active RF signals below 0 dBm may degrade signal integrity and decrease relay life. For more information about switching active RF signals visit ni.com/info and enter Info Code RFSwitching.

Typical DC path resistance	
Initial	$< 0.35 \, \Omega$
End-of-life	$\geq 1.0 \, \Omega$

Path resistance is a combination of relay contact resistance and trace resistance. Contact resistance typically remains low for the life of a relay. At the end of relay life, the contact resistance rises rapidly above $1.0 \, \Omega$.

RF Performance Characteristics

Characteristic impedance (Z_0)	75 Ω nominal
------------------------------------	---------------------

Values in parentheses are typical.

Insertion loss	
$\leq 1 \, \text{GHz}$	$< 1.1 \, \text{dB}$ ($< 0.65 \, \text{dB}$)
$\leq 2 \, \text{GHz}$	$< 1.7 \, \text{dB}$ ($< 1.30 \, \text{dB}$)
$\leq 2.5 \, \text{GHz}$	$< 2.0 \, \text{dB}$ ($< 1.65 \, \text{dB}$)
Voltage standing wave ratio (VSWR)	

≤1 GHz	<1.3 dB (<1.2 dB)	
≤2 GHz	<1.65 dB (<1.35 dB)	
≤2.5 GHz	<1.75 dB (<1.5 dB)	
Typical isolation		
≤1 GHz	>49 dB	
≤2 GHz	>45 dB	
≤2.5 GHz	>43 dB	
Typical crosstalk		
≤1 GHz	<-60 dB	
≤2 GHz	<-55 dB	
≤2.5 GHz	<-55 dB	
Typical channel-to-channel skew		<30 ps
Typical propagation delay		1.2 ns
Typical rise time (10% to 90%)		90 ps

Figure 1. Typical Insertion Loss

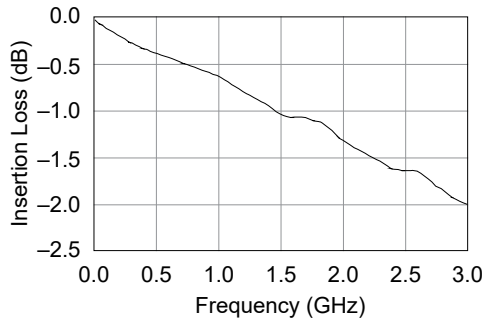


Figure 2. Typical Channel to Common VSWR

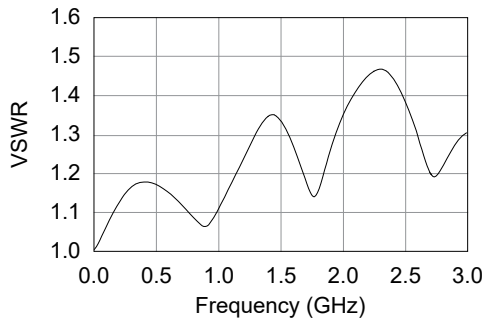


Figure 3. Typical Termination VSWR


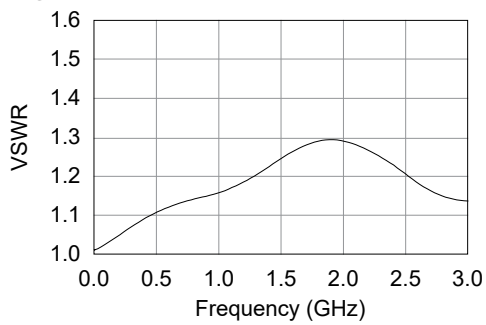


Figure 4. Typical Isolation




Termination Derating

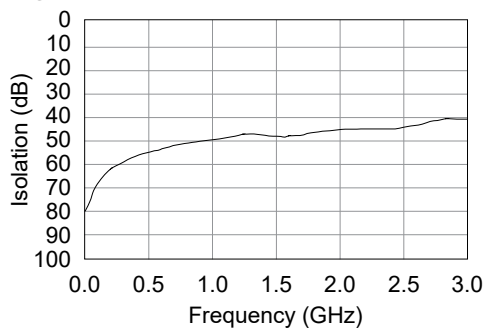

Caution When operating the PXI-2555 at ambient temperatures $>25^{\circ}\text{C}$, the derating in the following figure limits the maximum constant power each

termination can dissipate.

Figure 5. Termination Derating

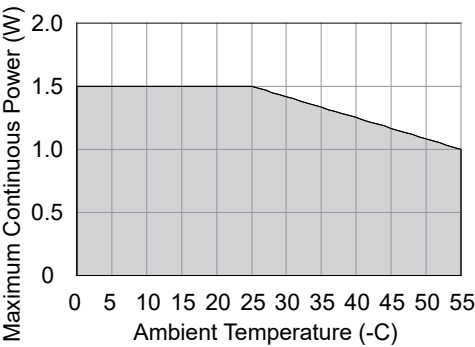

Caution Failure to operate below listed power limits can result in permanent damage to the module.

Dynamic Characteristics

Maximum relay operate time	10.4 ms
Maximum scan rate	45 channels/s



Note Certain applications may require additional time for proper settling. For information about including additional settling time, refer to the **NI Switches Help**.

Expected relay life	
Mechanical	1×10^6 cycles
Electrical (30 V, 10 mA, DC resistive)	3×10^5 cycles

Trigger Characteristics

Input trigger	
Sources	PXI trigger lines 0 to 7
Minimum pulse width	150 ns



Note The PXI-2555 recognizes trigger pulse widths less than 150 ns if digital filtering is disabled. Refer to the ***NI Switches Help*** for information about disabling digital filtering. Refer to the ***NI Switches Help***.

Output trigger	
Destinations	PXI trigger lines 0 to 7
Default pulse width	2 μ s, typical

Physical Characteristics

Relay type	Electromechanical, latching
I/O connectors	5 mini-75 Ohm SMB jacks, gold plated
PXI power requirement	3.7 W at 5 V, 0.3 W at 3.3 V
Dimensions (L $\times$ W $\times$ H)	3U, one slot, PXI/cPCI module 21.6 $\times$ 2.0 $\times$ 13.0 cm (8.5 $\times$ 0.8 $\times$ 5.1 in.)

Weight	218 g (7.7 oz)
--------	----------------

Environment

Table 2. Environment

Operating temperature	0 °C to 55 °C
Storage temperature	-20 °C to 70 °C
Relative humidity	5% to 85%, noncondensing
Pollution Degree	2
Maximum altitude	2,000 m

Indoor use only.

Shock and Vibration

Table 3. Shock and Vibration

Operational Shock	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Test profile developed in accordance with MIL-PRF-28800F.)
Random vibration, operating	5 Hz to 500 Hz, 0.3 g _{rms}
Random vibration, nonoperating	5 Hz to 500 Hz, 2.4 g _{rms} (Tested in accordance with IEC 60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

Compliance and Certifications

Safety Compliance Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1

- UL 61010-1, CSA C22.2 No. 61010-1



Note For safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations, certifications, and additional information, refer to ***Product Certifications and Declarations***.

Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products,

visit ni.com/product-certifications, search by model number, and click the appropriate link.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the ***Engineering a Healthy Planet*** web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

EU and UK Customers

-  **Waste Electrical and Electronic Equipment (WEEE)**—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国RoHS）

-  **中国RoHS**—NI符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于NI中国RoHS合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)