

COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash  Get Credit  Receive a Trade-In Deal

OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



Bridging the gap between the manufacturer and your legacy test system.

 1-800-915-6216

 www.apexwaves.com

 sales@apexwaves.com

All trademarks, brands, and brand names are the property of their respective owners.

Request a Quote

 **CLICK HERE**

PXIe-8240

PXIe-8240

Dual-Port 40 Gigabit Ethernet Peripheral Module

This document provides reference information for PXI Express and the PXIe-8240 module.

Contents

| | |
|---|----|
| Electromagnetic Compatibility Guidelines..... | 1 |
| Related Documentation..... | 2 |
| PXI Express Features..... | 2 |
| Benefits of PXI Express..... | 2 |
| PXIe-8240 Overview..... | 3 |
| Functional Overview..... | 3 |
| Functional Description..... | 3 |
| National Instruments Software..... | 4 |
| Specifications..... | 5 |
| Features..... | 5 |
| Front Panel Dimensions..... | 5 |
| Electrical..... | 6 |
| Physical..... | 6 |
| Environmental..... | 7 |
| Shock and Vibration..... | 7 |
| Safety..... | 8 |
| QSFP+ Connectors Pinout..... | 9 |
| Worldwide Support and Services..... | 12 |

Electromagnetic Compatibility Guidelines

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility (EMC) stated in the product specifications. These requirements and limits provide reasonable protection against harmful interference when the product is operated in the intended operational electromagnetic environment.

This product is intended for use in industrial locations. However, harmful interference may occur in some installations, when the product is connected to a peripheral device or test object, or if the product is used in residential or commercial areas. To minimize interference with radio and television reception and prevent unacceptable performance degradation, install and use this product in strict accordance with the instructions in the product documentation.

Furthermore, any modifications to the product not expressly approved by National Instruments could void your authority to operate it under your local regulatory rules.



Caution This icon denotes a caution, which advises you of precautions to take to avoid injury, data loss, or a system crash.



Caution The protection the PXIe-8240 provides can be impaired if it is used in a manner not described in the user documentation.



Caution To ensure the specified EMC performance, operate this product only with shielded cables and accessories.

Related Documentation

The following documents contain information that you might find helpful as you read this manual:

- Your chassis documentation
- *PXI Express Hardware Specification*, Revision 2.0
- *PXI-6 PXI Express Software Specification*
- *PICMG CompactPCI Express EXP.0 R1.0 Specification*
- *PCI Express Base Specification*, Revision 3.0, PCI Special Interest Group

PXI Express Features

Benefits of PXI Express

The PXI (PCI eXtensions for Instrumentation) industry standard, an open specification governed by the PXI Systems Alliance (PXISA), has quickly gained adoption and grown in prevalence in test, measurement, and control systems since its release in 1998. One of the key elements driving the rapid adoption of PXI is its use of PCI in the communication backplane. As the commercial PC industry has improved the available bus bandwidth by evolving PCI to PCI Express, PXI is now able to meet even more application needs by integrating PCI Express into the PXI standard. By taking advantage of PCI Express technology in the backplane, PXI Express increases the available PXI bandwidth from up to 132 MB/s to up to 8 GB/s for a more than 60x improvement in bandwidth.

PXI Express maximizes both hardware and software compatibility with PXI modules. PXI Express hybrid slots deliver both PCI and PCI Express signaling to accept devices that use PXI communication and triggering or the newer PXI Express standard. Software compatibility is maintained because PCI Express uses the same OS and driver model as PCI, resulting in complete software compatibility among PCI-based systems, for example PXI, and PCI Express-based systems such as PXI Express.

PXI Express, like PXI, leverages from the CompactPCI specification to define a rugged, modular form factor that offers superior mechanical integrity and easy installation and removal of hardware components. PXI Express products offer higher and more carefully defined levels of environmental performance required by the shock, vibration, temperature, and humidity extremes of industrial environments. Mandatory environmental testing and active cooling is

added to the CompactPCI mechanical specification to ease system integration and ensure multivendor interoperability.

The demanding timing and synchronization requirements of instrumentation systems are met by the integrated features of PXI Express. Not only are the trigger bus, 10 MHz system reference clock, and star trigger bus available in PXI retained by PXI Express, but new timing and synchronization features that include a 100 MHz differential system reference clock for the synchronization of multiple modules and three differential star trigger buses for the distribution of precise clock and trigger signals have been added. Differential timing and synchronization signals provide PXI Express systems with increased noise immunity and the ability to transmit clock signals at higher frequencies.

PXIe-8240 Overview

Functional Overview


The PXIe-8240 is a peripheral module that provides up to 40 Gigabit Ethernet (GbE) connectivity on two QSFP+ ports for a PXI Express system. It can attach to a PXI Express system via a high-bandwidth, low-latency PXI Express backplane Gen3 x8 link.

With the 40Gb Ethernet, it allows offloading data from a PXI Express system to an external storage solution or a server for further analysis. It also allows data exchange and aggregation across two or more PXI Express systems.

Functional Description

The PXIe-8240 is a peripheral module in a 1-slot 3U PXI Express form factor. The following figure is a functional block diagram of the PXIe-8240. Following the diagram is a description of each logic block shown.

Figure 1. PXIe-8240 Block Diagram

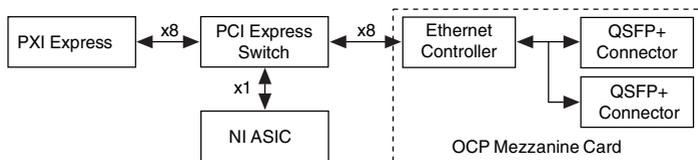

The PXIe-8240 consists of the following logic blocks on two circuit card assemblies (CCA):

- The *PXI Express Connectors* connect the PXIe-8240 to the PXI Express/CompactPCI Express backplane.
- The *PCI Express Switch* links the PXI Express backplane to the Ethernet controller on the OCP mezzanine card with PCI Express x8 links.
- The *OCP Mezzanine Card* block consists of the Ethernet controller and the QSFP+ connectors that provide the 40 GbE connectivity.

National Instruments Software

National Instruments has developed several software tools you can use with the PXIe-8240.

National Instruments' hardware and software work together to help you make the most of your PXI Express system. The LabVIEW, Measurement Studio, and LabWindows™/CVI™ application development environments combine with leading hardware drivers such as NI-DAQmx to provide exceptional control of NI hardware. Instrument drivers are available at ni.com/idnet to simplify communication with instruments over a variety of buses.

LabVIEW is a powerful and easy-to-use graphical programming environment you can use to acquire data from thousands of different instruments including USB, IEEE 488.2, VXI, serial, PLCs, and plug-in boards. LabVIEW helps you convert acquired data into meaningful results using powerful data analysis routines. Add-on tools provide additional specialized functionality. For more information, visit ni.com/labview and ni.com/toolkits.

If you prefer to use Microsoft's Visual Basic, Visual C++, and Visual Studio .NET for the core of your application, Measurement Studio adds tools for measurement and automation to each language. For more information, visit ni.com/mstudio.

LabWindows/CVI is an interactive ANSI C programming environment designed for building virtual instrument applications. LabWindows/CVI delivers a drag-and-drop editor for building user interfaces, a complete ANSI C environment for building your test program logic, and a collection of automated code generation tools, as well as utilities for building automated test systems, monitoring applications, or laboratory experiments. For more information, visit ni.com/lwcvl.

NI-DAQmx provides an extensive library of functions you can call from your application development environment or interactive environment such as NI Signal Express. These functions provide an intuitive API for National Instruments multifunction DAQ products. Features available include analog input (A/D conversion), buffered data acquisition (high-speed A/D conversion), analog output (D/A conversion), waveform generation, digital I/O, counter/timer operations, SCXI signal conditioning, RTSI or PXI Express synchronization, self-calibration, messaging, and acquiring data to extended memory. For more information, visit ni.com/daq.

National Instruments modular instruments use specialized drivers suited to each product's specialization. Express VIs provide customized, interactive programming of instruments in a single interface and soft front panels provide an interface for testing the functionality of each instrument with no programming required. NI Switches, DMMs, High-Speed DIO, High-Speed Digitizers, and Sources each have customized drivers for high-end modular instrumentation systems. RF applications leverage two drivers, NI-RFSG and NI-RFSA and Dynamic Signal Acquisition is available through NI-DAQmx. For more information, visit ni.com/modularinstruments.

You can expand the timing and triggering functionality of your PXI Express system with PXI Express Timing and Synchronization products. These products provide precision clock sources, custom routing of triggers for multichassis synchronization, clock sharing, and more and are programmed with NI-Sync. For more information, visit ni.com/pxi.

NI-VISA is the National Instruments implementation of the VISA specification. VISA is a uniform API for communicating and controlling USB, Serial, GPIB, PXI, PXI Express, VXI, and various other types of instruments. This API aids in the creation of portable applications and instrument drivers. For information about writing your own PXI Express instrument driver with NI-VISA, refer to the *NI-VISA Getting Started Manual* and the `readme.txt` file in the NI-VISA directory. For more information, visit ni.com/visa.

With LabVIEW for Linux and support for more than two hundred devices on Linux with the NI-DAQmx driver, you now can create Virtual Instruments based on the Linux OS. The NI-VISA driver for Linux has improved instrument control in Linux, and NI Modular Instruments are partially supported. For more information, visit ni.com/linux.

Specifications

This document lists the electrical, mechanical, and environmental specifications of the PXIe-8240 dual-port 40 Gigabit Ethernet peripheral module.


Features

| PXIe-8240 | |
|--------------------------------|--|
| Ethernet Connectivity | Two QSFP+ ports support 40GBASE-SR4 optic and Copper Direct Attach physical media |
| Data rate supported per port | Up to 40 GbE |
| PXI Express Link Configuration | Gen3 x8 PCI Express connection (maximum throughput is achievable with PXI Express Gen3 x8) |
| Slot Requirement | One peripheral slot |
| LED Indicators | LINK SPEED (green = 40 Gbps; yellow = 10 Gbps) LINK (solid) and ACTIVITY (blinking) |

Front Panel Dimensions

The following figure shows the front panel layout and dimensions of the PXIe-8240. Dimensions are in inches (millimeters).

Figure 2. PXIe-8240 Front Panel Layout and Dimensions

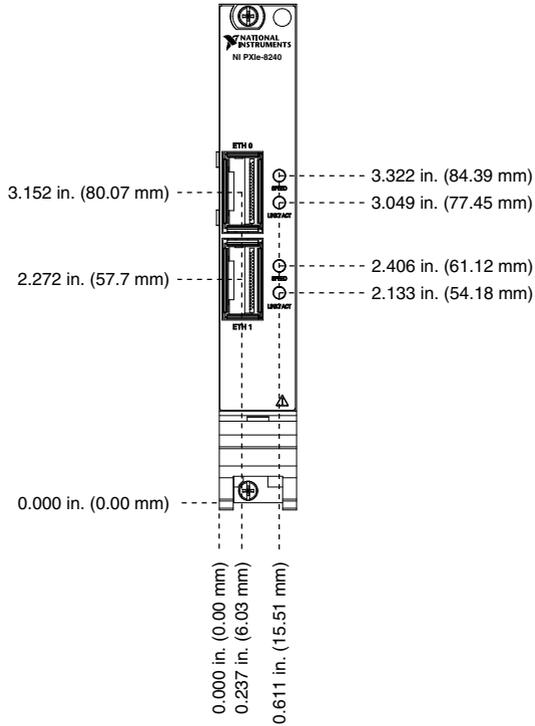

Electrical

| Power Rail | Typical Value | Max Value |
|-------------|---------------|-----------|
| +3.3 VDC | 0.64 A | 0.96 A |
| +12 VDC | 1.1 A | 1.65 A |
| Total Power | 15.31 W | 22.97 W |

Physical

| | |
|------------------|--|
| Board dimensions | 1-slot 3U PXI Express peripheral module |
| Compatibility | Fully compatible with <i>PXI Express Specification 1.0</i> |
| Weight | 246.2 g (0.54 lb) typical |



Caution Clean the hardware with a soft, nonmetallic brush. Make sure the hardware is completely dry and free from contaminants before returning it to service.

Environmental

Operating Environment

| | |
|---------------------------|--|
| Ambient temperature range | 0 °C to 55 °C (Tested in accordance with IEC-60068-2-1 and IEC-60068-2-2.) |
| Relative humidity range | 10% to 90%, noncondensing (Tested in accordance with IEC-60068-2-56.) |
| Maximum altitude | 2,000 m (800 mbar) |
| Pollution Degree | 2 |

Indoor use only.

Storage Environment

| | |
|---------------------------|--|
| Ambient temperature range | -40 °C to 71 °C (Tested in accordance with IEC-60068-2-1 and IEC-60068-2-2.) |
| Relative humidity range | 5% to 95%, noncondensing (Tested in accordance with IEC-60068-2-56.) |

Shock and Vibration

| | |
|------------------|---|
| Operating shock | 30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC-60068-2-27. Meets MIL-PRF-28800F Class 2 limits.) |
| Random vibration | |
| Operating | 5 Hz to 500 Hz, 0.3 g _{rms} |
| Nonoperating | 5 Hz to 500 Hz, 2.4 g _{rms} (Tested in accordance with IEC-60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.) |

Safety

This product is designed to meet the requirements of the following standards of safety for information technology equipment:

- IEC 61010-1, EN 61010-1
- CAN/CSA-C22.2 No. 61010-1



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations and certifications, and additional information, refer to the [Online Product Certification](#) section.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit ni.com/

certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

Battery Replacement and Disposal



Battery Directive This device contains a long-life coin cell battery. If you need to replace it, use the Return Material Authorization (RMA) process or contact an authorized National Instruments service representative. For more information about compliance with the EU Battery Directive 2006/66/EC about Batteries and Accumulators and Waste Batteries and Accumulators, visit ni.com/environment/batterydirective.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

QSFP+ Connectors Pinout

The following figure shows the pinouts for the QSFP+ connectors on the PXIe-8240. The following table lists and describes the QSFP+ connector signals.

Figure 3. QSFP+ Connector Pinout

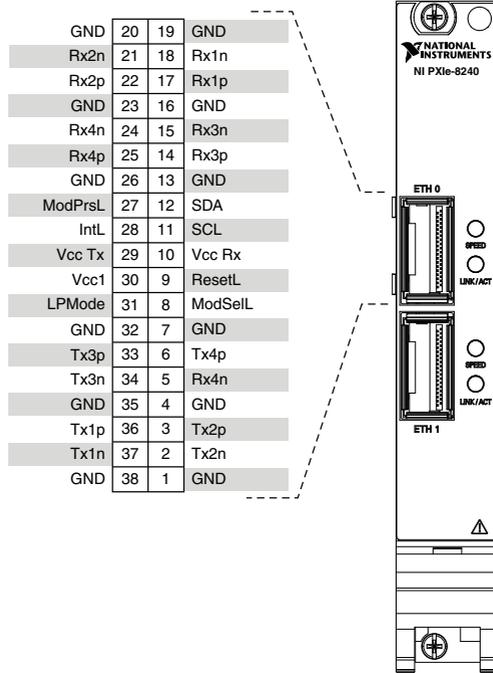


Table 1. QSFP+ Connector Signals

| Pin | Symbol | Name/Description |
|-----|---------|-------------------------------------|
| 1 | GND | Ground |
| 2 | Tx2n | Transmitter Inverted Data Input |
| 3 | Tx2p | Transmitter Non-Inverted Data Input |
| 4 | GND | Ground |
| 5 | Tx4n | Transmitter Inverted Data Input |
| 6 | Tx4p | Transmitter Non-Inverted Data Input |
| 7 | GND | Ground |
| 8 | ModSelL | Module Select |
| 9 | ResetL | Module Reset |
| 10 | Vcc Rx | +3.3V Power Supply Receiver |

Table 1. QSFP+ Connector Signals (Continued)

| Pin | Symbol | Name/Description |
|------------|---------------|-------------------------------------|
| 11 | SCL | 2-Wire Serial Interface Clock |
| 12 | SDA | 2-Wire Serial Interface Data |
| 13 | GND | Ground |
| 14 | Rx3p | Receiver Non-Inverted Data Output |
| 15 | Rx3n | Receiver Inverted Data Output |
| 16 | GND | Ground |
| 17 | Rx1p | Receiver Non-Inverted Data Output |
| 18 | Rx1n | Receiver Inverted Data Output |
| 19 | GND | Ground |
| 20 | GND | Ground |
| 21 | Rx2n | Receiver Inverted Data Output |
| 22 | Rx2p | Receiver Non-Inverted Data Output |
| 23 | GND | Ground |
| 24 | Rx4n | Receiver Inverted Data Output |
| 25 | Rx4p | Receiver Non-Inverted Data Output |
| 26 | GND | Ground |
| 27 | ModPrsL | Module Present |
| 28 | IntL | Interrupt |
| 29 | Vcc Tx | +3.3V Power Supply Transmitter |
| 30 | Vcc1 | +3.3V Power Supply |
| 31 | LPMode | Low Power Mode |
| 32 | GND | Ground |
| 33 | Tx3p | Transmitter Non-Inverted Data Input |
| 34 | Tx3n | Transmitter Inverted Data Input |
| 35 | GND | Ground |

Table 1. QSFP+ Connector Signals (Continued)

| Pin | Symbol | Name/Description |
|-----|--------|-------------------------------------|
| 36 | Tx1p | Transmitter Non-Inverted Data Input |
| 37 | Tx1n | Transmitter Inverted Data Input |
| 38 | GND | Ground |



Note The PXIe-8240 can perform an automatic crossover, thus eliminating the need for crossover cables.

Table 2. Link/Activity and Speed Indicator LEDs

| | Speed LED | Link/Activity LED |
|---------------------------|-----------------------------------|-------------------|
| No Link | Off | Off |
| Linked—No Activity | Yellow = 10 GbE Green = 40 GbE | Green |
| Linked—Activity | Yellow = 10 GbE Green = 40 GbE | Blinking Green |

Worldwide Support and Services

The NI website is your complete resource for technical support. At ni.com/support, you have access to everything from troubleshooting and application development self-help resources to email and phone assistance from NI Application Engineers.

Visit ni.com/services for NI Factory Installation Services, repairs, extended warranty, and other services.

Visit ni.com/register to register your NI product. Product registration facilitates technical support and ensures that you receive important information updates from NI.

A Declaration of Conformity (DoC) is our claim of compliance with the Council of the European Communities using the manufacturer's declaration of conformity. This system affords the user protection for electromagnetic compatibility (EMC) and product safety. You can obtain the DoC for your product by visiting ni.com/certification. If your product supports calibration, you can obtain the calibration certificate for your product at ni.com/calibration.

NI corporate headquarters is located at 11500 North Mopac Expressway, Austin, Texas, 78759-3504. NI also has offices located around the world. For telephone support in the United States, create your service request at ni.com/support or dial 1 866 ASK MYNI (275 6964). For telephone support outside the United States, visit the *Worldwide Offices* section of ni.com/

[*niglobal*](#) to access the branch office websites, which provide up-to-date contact information, support phone numbers, email addresses, and current events.

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2017 National Instruments. All rights reserved.

377048A-01 April 11, 2017