

COMPREHENSIVE SERVICES

We offer competitive repair and calibration services, as well as easily accessible documentation and free downloadable resources.

SELL YOUR SURPLUS

We buy new, used, decommissioned, and surplus parts from every NI series. We work out the best solution to suit your individual needs.

 Sell For Cash  Get Credit  Receive a Trade-In Deal

OBSOLETE NI HARDWARE IN STOCK & READY TO SHIP

We stock **New**, **New Surplus**, **Refurbished**, and **Reconditioned** NI Hardware.



Bridging the gap between the manufacturer and your legacy test system.

 1-800-915-6216

 www.apexwaves.com

 sales@apexwaves.com

All trademarks, brands, and brand names are the property of their respective owners.

Request a Quote

 **CLICK HERE**

SCXI-2000

SCXI-1372 DUAL RACK-MOUNT KIT

This guide describes how to attach the SCXI-1372 dual rack-mount kit to two SCXI-1000, SCXI-1000DC, or SCXI-2000 chassis.

Introduction

You can use the SCXI-1372 dual rack-mount kit to mount two SCXI-1000, SCXI-1000DC, or SCXI-2000 chassis in a standard 19 in. rack. With the multiposition rack-mount brackets, you can install the SCXI chassis in one of six different positions to attain the desired front panel depth.

What You Need to Get Started

- SCXI-1372 dual rack-mount kit
 - Two rack-mount brackets
 - Eight 8-32 by 5/16 in. Phillips flathead screws
 - Four 10-32 by 1/2 in. Phillips panhead screws
 - Two joiner brackets for the 4-slot SCXI-1372 chassis
 - Eight 6-32 by 1/4 in. Phillips flathead screws
 - SCXI-1372 Dual Rack-Mount Kit Installation Guide*
- No. 2 Phillips-head screwdriver
- Two SCXI chassis

Installation

Refer to Figures 1 and 2 as you perform the following installation steps. The rack-mount brackets (item 4 in Figure 2) can be mounted in one of six positions to attain different depths. For detailed measurements of the

SCXI™ is a trademark of National Instruments Corporation. Product and company names are trademarks or trade names of their respective companies.

SCXI chassis, refer to Appendix A, *Specifications*, of the *SCXI Chassis User Manual*. Item numbers refer to the labels in the figures.

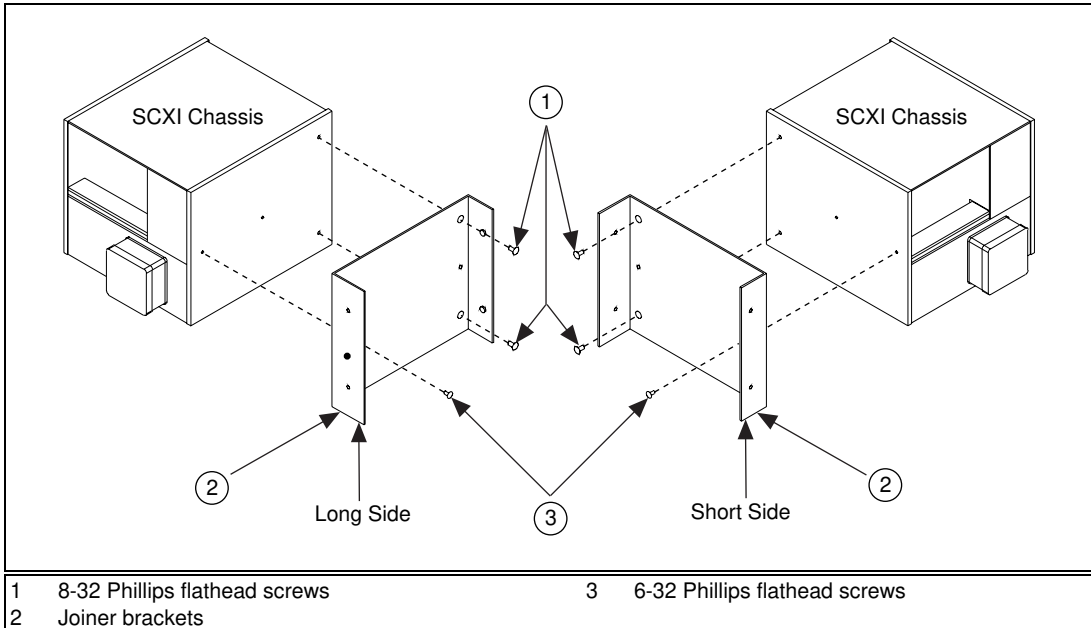


Figure 1. Attaching the Joiner Brackets to the SCXI Chassis

Refer to Figure 1 as you perform the following steps:

1. Turn off the SCXI chassis power.
2. Using four 8-32 screws (item 1) and two 6-32 screws (item 3), attach each joiner bracket (item 2) to a 4-slot SCXI chassis.

Refer to Figure 2 as you perform the following steps:

3. Use four 6-32 screws (item 1) to attach the two joiner brackets (item 2) to each other.
4. Use the other four 8-32 screws (item 5) to attach the two rack-mount brackets (item 4) to your SCXI chassis.
5. Use two 6-32 screws (item 6) to secure the rack-mount brackets (item 4) to your SCXI chassis when they are in positions 1, 2, 3, or 4.
6. Use the four 10-32 screws (item 3) to attach the assembly to your rack.

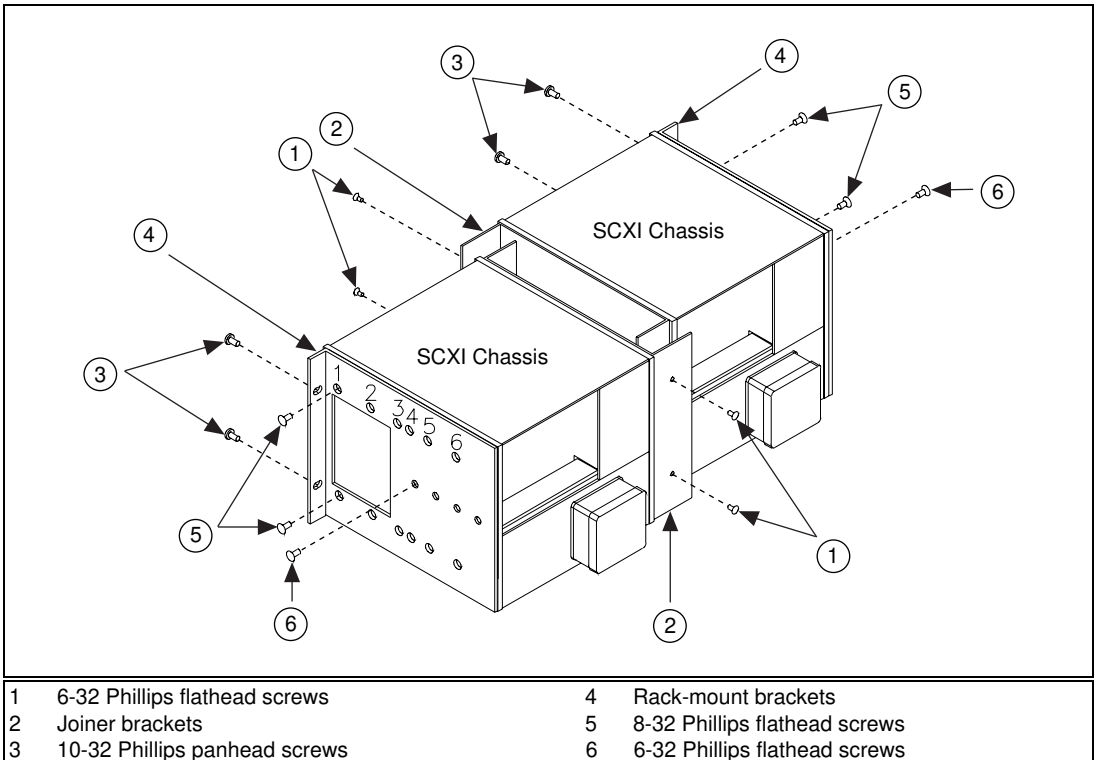


Figure 2. Rack-Mount Kit Installation