
USB-5683

Specifications

2025-07-22



Contents

USB-5683 Specifications 3

USB-5683 Specifications

USB-5683 Specifications

These specifications apply to the USB-5683 .

All specifications are subject to change without notice.



Notice The protection provided by the USB-5683 can be impaired if it is used in a manner not described in this document.

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are **Typical** unless otherwise noted.

Conditions

Minimum or maximum specifications are warranted under the following conditions unless otherwise noted.


- 1 hour warm-up time at ambient temperature
- Calibration cycle maintained
- Temperature 0 °C to 55 °C

USB-5683 Pinout

Use the pinout to connect to terminals on the USB-5683 .


The following figure shows both panels of the device.

Figure 1. USB-5683 Front Panel

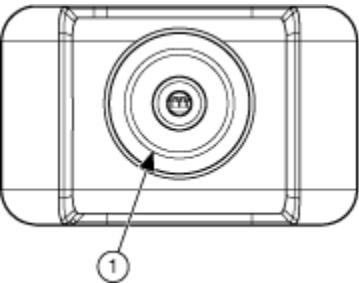

- 1. Type-N Connector

Figure 2. USB-5683 Back Panel

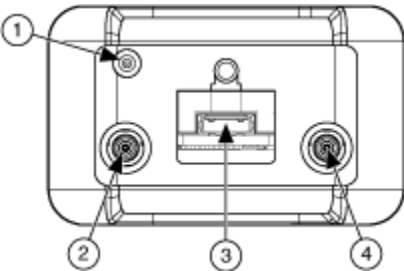

- 1. Status LED
- 2. External Trigger In Terminal
- 3. Mini-B USB Port
- 4. External Trigger Out Terminal

**Note** The External Trigger Out terminal is currently unsupported.

Table 1. Information about the USB-5683 module back panel LED

LED	Indication
Green	The USB-5683 is connected to a computer or a chassis and is functioning properly.
Yellow	An error has occurred.
Off	The USB-5683 is not initialized.



Note The USB-5683 device has a USB 2.0 interface with a USB Type Mini-B port. You can remotely program the device using this USB interface. In addition to communication, the USB supplies power to the device. The interface is USB 2.0- and USB 1.1-compatible and operates with an interface speed of 12 Mb/s.

General

Frequency range	10 MHz to 8 GHz
Input range	-60 dBm to +20 dBm
VSWR	
10 MHz to 150 MHz	<1.17 : 1
>150 MHz to 2 GHz	<1.12 : 1
>2 GHz to 8 GHz	<1.22 : 1
Measurement range	
Range 1	+4 dBm to +20 dBm, typical
Range 2	-16 dBm to <+4 dBm, typical
Range 3	-60 dBm to <-16 dBm, typical
Signal-channel bandwidth	50 kHz, typical

Uncertainty

Absolute Power Measurement Uncertainty Expanded uncertainty with $k = 2$ for a CW measurement after zeroing. Includes calibration factor and linearity; noise, zero set, and drift must be added.

Table 2. Measurement Uncertainty (dB), 0 °C to 50 °C

Power Measured (dBm)	Frequency (GHz)		
	≤ 0.05	> 0.05 to 2	> 2 to 8
-60 to < -16	0.14	0.14	0.14
-16 to $< +4$	0.14	0.14	0.13
+4 to +20	0.14	0.15	0.15

Table 3. Measurement Uncertainty (dB), 20 °C to 30 °C

Power Measured (dBm)	Frequency (GHz)		
	≤ 0.05	> 0.05 to 2	> 2 to 8
-60 to < -16	0.13	0.12	0.14
-16 to $< +4$	0.11	0.10	0.13
+4 to +20	0.11	0.10	0.10

Relative Power Measurement Uncertainty Expanded uncertainty with $k = 2$ for measurement of a change in power of a CW signal after zeroing. Includes calibration factor and linearity; noise, zero set, and drift must be added.

Table 4. Measurement Uncertainty (dB), ≤ 0.05 GHz

Initial Power Measured (dBm)	Final Power Measured (dBm)					
	0 °C to 50 °C			20 °C to 30 °C		
	+4 to +20	-16 to $< +4$	-60 to < -16	+4 to +20	-16 to $< +4$	-60 to < -16
-60 to < -16	0.14	0.13	0.03	0.08	0.09	0.03

Initial Power Measured (dBm)	Final Power Measured (dBm)					
	0 °C to 50 °C			20 °C to 30 °C		
	+4 to +20	-16 to <+4	-60 to <-16	+4 to +20	-16 to <+4	-60 to <-16
-16 to <+4	0.14	0.04	0.13	0.06	0.03	0.09
+4 to +20	0.05	0.14	0.14	0.05	0.06	0.08

Table 5. Measurement Uncertainty (dB), >0.05 GHz to 2 GHz

Initial Power Measured (dBm)	Final Power Measured (dBm)					
	0 °C to 50 °C			20 °C to 30 °C		
	+4 to +20	-16 to <+4	-60 to <-16	+4 to +20	-16 to <+4	-60 to <-16
-60 to <-16	0.16	0.16	0.03	0.11	0.12	0.03
-16 to <+4	0.17	0.05	0.16	0.09	0.04	0.12
+4 to +20	0.06	0.17	0.16	0.06	0.09	0.11

Table 6. Measurement Uncertainty (dB), >2 GHz to 8 GHz

Initial Power Measured (dBm)	Final Power Measured (dBm)					
	0 °C to 50 °C			20 °C to 30 °C		
	+4 to +20	-16 to <+4	-60 to <-16	+4 to +20	-16 to <+4	-60 to <-16
-60 to <-16	0.16	0.16	0.04	0.12	0.14	0.04
-16 to <+4	0.17	0.05	0.16	0.10	0.04	0.14
+4 to +20	0.06	0.17	0.16	0.07	0.10	0.12

Table 7. Noise, Zero Set, Zero Drift Uncertainty

Power Measured (dBm)	Noise ¹	Zero Set ²	Zero Drift ³
-60 to <-16	<123 pW	<332 pW	<344 pW
-16 to <+4	<10.1 nW	<38.7 nW	<42.9 nW
+4 to +20	<0.856 μ W	<1.07 μ W	<0.996 μ W

Table 8. Effects of Digital Modulation⁴

Power Measured (dBm)	Uncertainty (dB)
-60 to <-16	+0.080/-0.048
-16 to <+4	+0.088/-0.038
+4 to +20	+0.067/-0.055

Power Measurement

Measurement	Average power
Measurement resolution	0.01 dB maximum
Offset range	-100 dB to +150 dB

- Noise is specified as two-sigma (at three-sigma confidence) after zero operation when measured with 10.2 seconds of measurement time (measurement time = **Aperture Time * Number of Averages**). Effect of noise can be reduced by increasing the number of averages and/or increasing the aperture time. Noise decreases at a rate equal to the square root of the number of averages and aperture time.
- Zero set is specified as the mean (at three-sigma confidence) after zero operation when measured with 256 averages and 40 ms aperture time for 1 hour, and when keeping the temperature within ± 1 °C.
- Zero drift is specified as two-sigma (at three-sigma confidence) after zero operation when measured with 256 averages and 40 ms aperture time for 1 hour, and when keeping the temperature within ± 1 °C.
- Measurement error with reference to a CW signal of equal power and frequency at 20 °C to 30 °C.

Averaging	
Averaging mode	Auto, manual
Averaging type	Moving, repeat
Number of averages (manual) ⁵	1 to 65,536
Auto-averaging	
Resolution ⁶	1 dB, 0.1 dB, 0.01 dB
Source	Time Slot mode: 1 to 128 slots; or Scope mode: 1 to 16,384 data points

Continuous Mode

Duty cycle correction	0.001% to 100%
Aperture time	0.01 ms to 1 s
Maximum buffer size	8,192
Measurement time ^[7] ⁷	Up to 1,000 measurements per second, unbuffered

- Maximum number of averages allowed in Continuous mode and Time Slot mode is 65,536. In Scope mode, the maximum number of averages is equal to 16,777,216 divided by the number of data points.
- Averaging resolution of 0.001 dB is not available with the NI-568x SFP. This feature is only available when using the NI-568x instrument driver. Averaging resolution is defined as the place after the decimal to which the reading becomes stable.
- Times are typical based on benchmark results taken using an NI PXIe-8135 controller and an

	More than 10,000 measurements per second, buffered
--	--

Table 9. Measurement Time Examples

Aperture Time (ms)	Averages = 1, in ms	Averages = 10, in ms
0.01	1.0	1.5
0.1	1.2	3.0
1	4.0	19.1
10	34.6	187
100	347	1907

Scope Mode

Capture time	0.01 ms to 1 s
Data points	1 to 16,384
Resolution	0.01 ms maximum
Measurement time ⁸	<i>Capture Time</i> * 6.2 + 0.013

USB-5683. Performance may vary based on system configuration. Trigger source set to Immediate. Number of Averages = 1 for repeat average mode.

8. Times are typical based on benchmark results taken using an NI PXIe-8135 controller and an USB-5683. Performance may vary based on system configuration. Trigger source set to Immediate. Number of Averages = 1 for repeat average mode.

Time Slot Mode

Maximum number of slots	128
Slot width	0.01 ms to 100 ms
Maximum capture time	1,000 ms (<i>Slot Width * Number of Slots</i>)
Resolution	0.01 maximum
Exclusion periods⁹	
Start exclusion	0 ms to 10 ms
End exclusion	0 ms to 10 ms

Trigger

Internal Trigger

Source ¹⁰	Bus or Continuous (Auto, Single or Multiple)
Range	-35 dBm to +20 dBm
Level accuracy	±0.5 dB, typical

9. The start exclusion time plus the end exclusion time must be less than the slot width.

10. Software trigger not available in the NI-568x SFP. This feature is only available when using the NI-568x instrument driver. Internal and external triggers are not available when using Continuous acquisition mode.

Slope	Positive or negative
Delay range	-5 ms to 10 s
Delay resolution	10 μ s

Trigger In

Impedance	4 k Ω , nominal
Type	TTL/CMOS
Slope	Positive
Delay range	-5 ms to 10 s
Delay resolution	10 μ s
Voltage high threshold	2.3 V, typical
Voltage low threshold	1.2 V, typical
Hysteresis	0.2 V, typical
Maximum voltage	± 5.5 V

Minimum pulse width	100 ns
Latency ¹¹	10.6 μ s, maximum
Repetition period	14.2 μ s, minimum

Trigger Out

Trigger Out capability is not currently implemented.

Interface

RF connector	N (m)
Interface to host	USB 2.0 full speed (compatible with USB 1.0 and USB 1.1)
External trigger input	MCX(f)

Maximum Damage Levels

Maximum DC voltage at RF port	± 20 V
Maximum power at RF port	+30 dBm (+34 dBm for 10 μ s pulse, 10% duty cycle)
Maximum voltage at trigger input	5.5 V

11. Latency is defined as the time delay between the sensor receiving the trigger and the measurement initiation.

DC Power Requirements (5 V) from Host USB

Typical current	450 mA
-----------------	--------



Caution You can impair the protection provided by the USB-5683 if you use it in a manner not described in this document.

Calibration

Interval	1 year; calibration interval starts with the date the product is put into service by the customer
----------	---

Physical Characteristics

Dimensions	110 mm x 45 mm x 25.6 mm, excluding RF connector and silicone cover
Weight	397 g (0.88 lb)



Caution Clean the hardware with a soft, nonmetallic brush. Make sure the hardware is completely dry and free from contaminants before returning it to service.

Environment

Maximum altitude	4,600 m operational
Pollution Degree	2

Indoor use only.

Operating Environment

Ambient temperature range	0 °C to 50 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2.)	
Relative humidity range ¹² (noncondensing)		
At 50 °C		45%
At 40 °C		75%
At 30 °C		95%

Storage Environment

Ambient temperature range	-40 °C to +71 °C (Tested in accordance with MIL-PRF-28800F (Class 3).)	
Relative humidity range	5% to 95%, noncondensing (Tested in accordance with MIL-PRF-28800F (Class 3).)	

Shock and Vibration

Operating shock	30 g peak, half-sine, 11 ms pulse
Random vibration	

12. Tested in accordance with IEC 60068-2-56.

Operating	5 Hz to 500 Hz, 0.3 g _{rms}
Nonoperating	5 Hz to 500 Hz, 2.4 g _{rms}

Compliance and Certifications

Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In

Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations, certifications, and additional information, refer to the [Online Product Certification](#) section.

Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit ni.com/product-certifications, search by model number, and click the appropriate link.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the ***Engineering a Healthy Planet*** web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

EU and UK Customers

-  **Waste Electrical and Electronic Equipment (WEEE)**—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国RoHS）

-  **中国RoHS**— NI符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于NI中国RoHS合规性信息，请登录 ni.com/environment/rohs_china。 (For information about China RoHS compliance, go to ni.com/environment/rohs_china.)